

REFRIGERATOR MANUFACTURER  
**Turbo air**

**Best in the World**

REFRIGERATOR MANUFACTURER  
**Turbo air**

[www.turboairinc.com](http://www.turboairinc.com)  
[www.turboairchina.com](http://www.turboairchina.com)

**USA Headquarters**

**Turbo Air (Headquarters)**

ADD: 418E. Conant St., Long Beach, CA 90808  
TEL: 310-900-1000  
FAX: 310-900-1077

**Qingdao Factory**


**Turbo Air China**

ADD: No.5187,Beier Mountain Road ,Huangdao  
District,Qingdao  
TEL: 0532 8513 2266  
400 6799 567  
A/S TEL: 400 6199 123

**International Sales HQ**

**Turbo Air**

ADD: #501, Gi-lm Bldg., 228, Guro-joongangro,  
Guro-district, Seoul, South Korea  
Mr. J.K.LEE / DIRECTOR  
E-mail : jklee@turboairinc.com

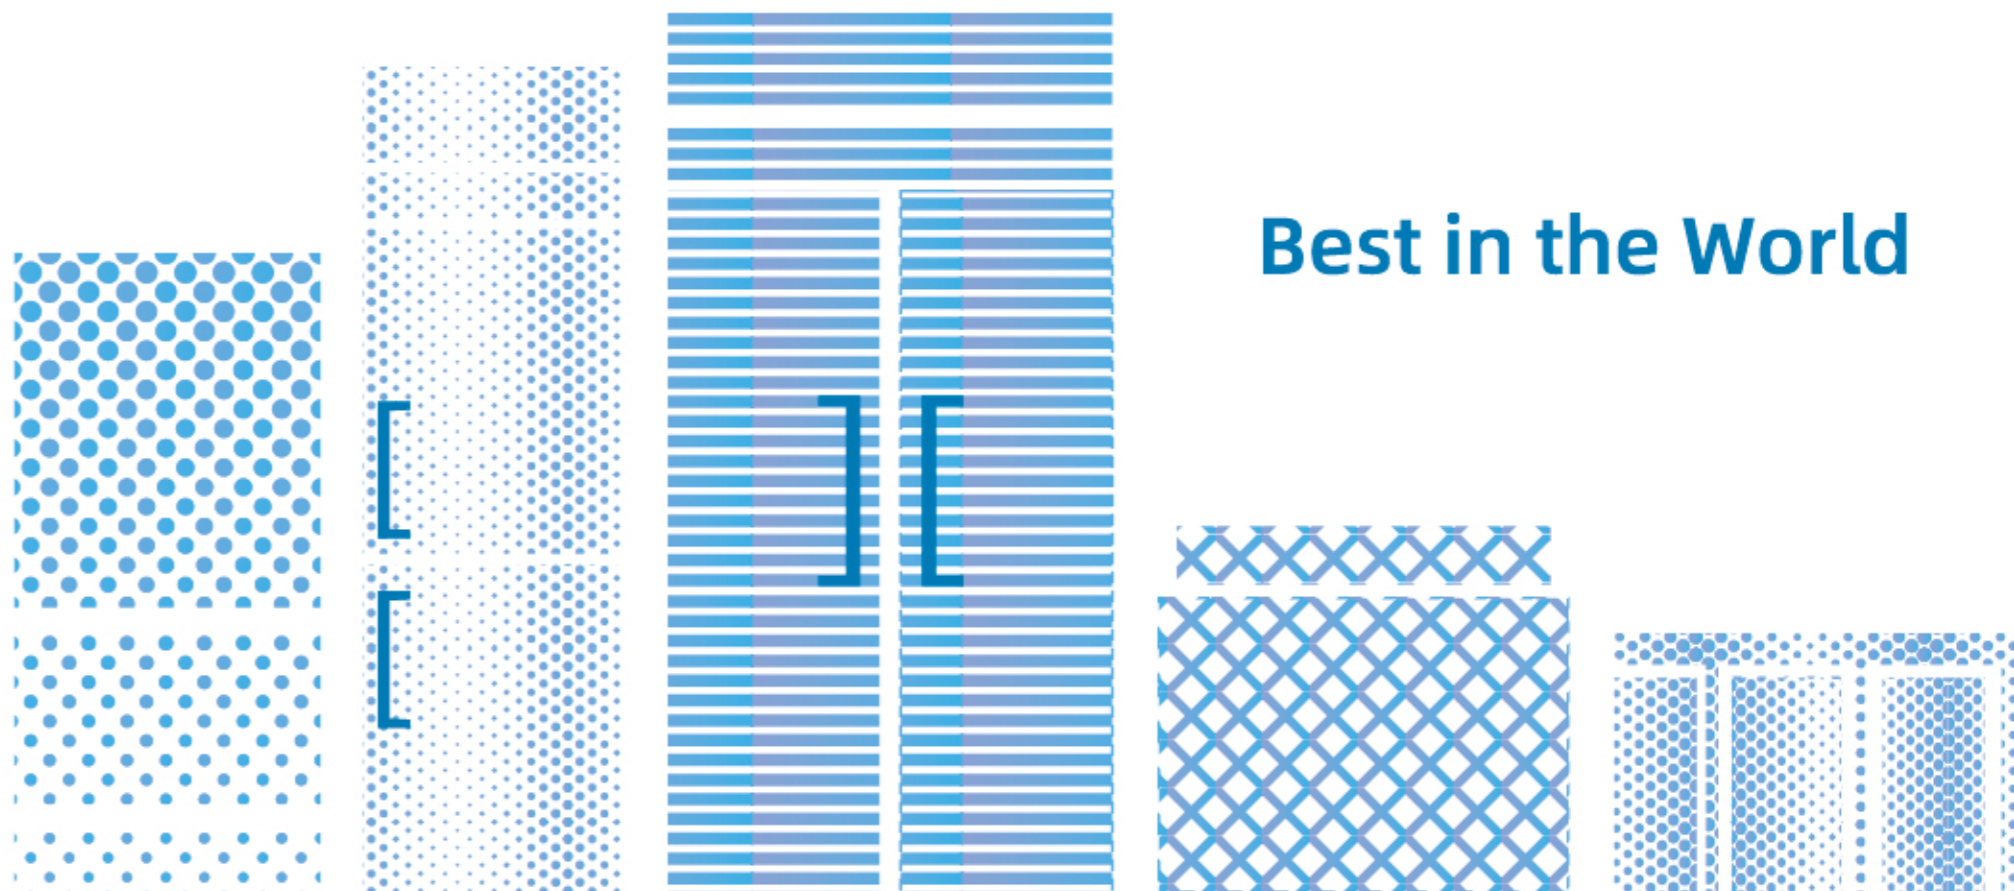

REFRIGERATOR MANUFACTURER  
**Turbo air**

***NO INNOVATION  
NO FUTURE***

REFRIGERATOR MANUFACTURER  
**Turbo air**





# My 50-Year Journey with Refrigeration

At 13 years old, I began my part-time job to pay for school, which started my 50-year career in refrigeration. I found that I had an aptitude for the work, and more importantly, I enjoyed it. It didn't take long until it wasn't just about raising money for school. I kept at it, and I dropped out of college my freshman year to start my own refrigeration business. I invested my last \$30, taking a risk that paid off. It grew rapidly, and when I was 25 I founded South Korea's first plant to mass-produce commercial refrigerators.

In 1985, I emigrated from South Korea to Los Angeles, where I continued to follow my passions. I opened my business selling and repairing refrigerators. I also constructed restaurants and grocery stores, finding the refrigeration systems and layouts that best fit their needs. Through my combined experiences, I became an expert on the environments which refrigerators operated in and all my competitor's products. As I built my expertise, I noticed that there was little-to-no technological advancement. The products had remained the same over several decades, across all major manufacturers. I knew there was a better way.

I founded Turbo Air with innovation and consumer convenience at the forefront. Turbo Air was the first company to apply digital control in commercial refrigerators, a mere 22 years ago, and now it's the industry standard. I pioneered the use of automatic fans, temperature control and external monitoring, and indoor illumination for under-counter and salad/sandwich units. I work towards improving Turbo Air products every day, and I continue to lead the charge with my patented Self-Cleaning Condenser. This revolutionary device marks the end of the 100-year-old problem, rooted in ill-maintained condensers.

My innovation goes beyond technology, as I am the trailblazer of innovation in customer service. One of the many precedents I have set in this industry is direct delivery to dealers, with 13 warehouse locations nationwide. Multiple locations ensure damage free delivery within 1-2 days. Also, I utilize in-house technicians, who complete 95% of service calls within 3 business days. I am also the first to implement the MSP (minimum sales price) program in the refrigeration industry to alleviate excessive competition among dealers. I am always looking to improve, not only the products but your experience with customer service.

It has been 50 wonderful years, and my journey still continues.

Sincerely,

Brian S. Kim  
Chief Engineer & CEO













# Global Turbo Air Group

## Manufacturing Divisions



# Turbo Air in the United States

## Branch/Distribution Locations

<b>HAWAII</b>  179 Sand Island Access Rd. #8 Honolulu, HI 96819	<b>OAKLAND</b>  1617 Whipple Rd. Suite A Hayward, CA 94544	<b>SEATTLE</b>  2515 142nd Ave. E., Sumner, WA 98390	<b>NEW JERSEY</b>  10 Basin Dr. Suite 110 Kearny, NJ 07032
<b>DENVER</b>  3650 Fraser St. Unit C, Aurora, CO 80011	<b>HOUSTON</b>  4300 N. Sam Houston Pkwy. W. #410 Houston, TX 77086	<b>DALLAS</b>  1800 S. Great Southwest Pkwy. Grand Prairie, TX 75051	<b>PITTSBURGH</b>  201 Locust St. Suite B2 Youngwood, PA 15697
<b>CHICAGO</b>  101 E. Crossroads Pkwy. Suite B Bolingbrook, IL 60440	<b>CINCINNATI</b>  12080 Best Place, Sharonville, OH 45241	<b>ATLANTA</b>  5345 Buford Highway, Norcross, GA 30071	<b>MIAMI</b>  2701 SW 145th Ave. Suite 220 Miramar, FL 33027



### CALIFORNIA Headquarters

4184 E. Conant St., Long Beach, CA 90808  
[www.turboairinc.com](http://www.turboairinc.com)



## Turbo Air in China




- June 2005 ○ Established in China.
- October 2005 ○ Obtained UL, ETL, NSF certifications.
- February 2006 ○ Started exporting to the United States.
- June 2009 ○ Obtained CCC, CE, RoHS certifications.
- October 2009 ○ Started domestic sales in China.
- January 2010 ○ Developed K series (25 models).
- July 2014 ○ Developed show cases (18 models).
- June 2015 ○ Developed Gelato Show Cases (3 models).
- October 2015 ○ Developed High Bakery Cases/High Open Cases (8 models).
- August 2016 ○ New plant completed in Qingdao.
- April 2017 ○ Developed energy-saving products and started exporting to the US.
- October 2018 ○ Obtained CE, EEI, RoHS certifications for European energy saving products.
- June 2019 ○ Developed M3 series, K series, SHALLOW DEPTH series (all R290 refrigerants).
- November 2020 ○ Launched high-end P series in China
- December 2021 ○ TB Back Bar series in china
- 2022-2023 ○ K series first class products



# Why Turbo Air?

Reliability  
Energy Efficiency  
Elegant Design  
Environment Friendly

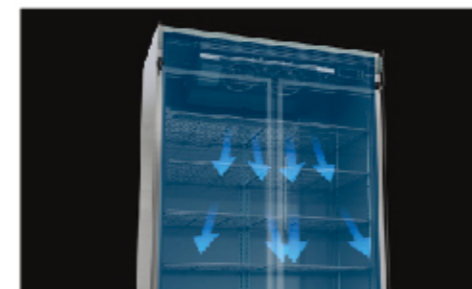

## ✓ Efficient Refrigeration System

Refrigerators achieve their cooling effect by discharging heat through the condenser. In order to achieve high efficiency, it is important to increase the effectiveness of the condensers, especially in hot & humid places, such as the kitchen. Turbo Air uses its self-produced evaporators and condensers to maximize the efficiency: 10%-15% higher than the industry standard.



## ✓ Digital Temperature Control System

Digital technology provides precise and constant temperatures throughout the cabinet. This allows food products to remain fresh over an extended period of time.



## ✓ Condensate Water Cooling System

Unique to Turbo Air products, our anti-corrosion pipes are coated on the surface with a special treatment, allowing the excess condensate waters to cool down the pipe's hottest area during the refrigerant compression process. This not only saves energy, but also eliminates the need for additional drains, which prevents slippery floors from becoming a safety issue.



## ✓ Turbo Cooling & Freeze Feature for Faster Chilling

The Turbo Cooling and Freeze function, located on the control panel, allows the compressor to run continuously for up to two hours. When this function is activated, the temperature inside the cabinet quickly decreases and cools drinks, food, and other products much more quickly. An ideal time to use the Turbo Cooling and Freeze function is when the unit is stocked with new products.

## ✓ LED Lighting Interior Display System

Fluorescent lights emit enormous amount of heat and consume excessive more energy. Turbo Air products use LED lights to reduce energy consumption and to extend the unit's lifespan. They also use optimal light angles to enhance display effects.

## ✓ Self-cleaning Condenser

Dust can accrue rapidly in areas where refrigeration is installed and used. Dust is drawn through the fan and accumulated. Preventing the condenser from properly releasing heat. This causes the compressor to increase its pressure on refrigerants, increasing the possibility of the compressor breaking down. The 'Self-Cleaning Condenser' cleans the condenser with a rotating brush that moves up and down 2-3 times a day, preventing any dust built-up and making it possible to always maintain the highest efficiency while saving additional energy.

# Contents



Reach-In Refrigerators & Freezers

<b>P-Series</b>	
Reach-In Refrigerators & Freezers	09
<b>K-Series</b>	
Vertical Freezer A Grade Products	13
Reach-In Refrigerators & Freezers	21
Reach-In Dual Temp	23
Reach-In Bun Pan	25
Reach-In Glass Door	29
<b>M3-Series</b>	
Reach-In Refrigerators & Freezers	31



Undercounter Refrigerators & Freezers

<b>P-Series</b>	
Undercounter Refrigerators & Freezers	35
<b>K-Series</b>	
Platform Freezer A Grade Product	37
Undercounter Refrigerators & Freezers/ Dual Temp/Bun Pan/GN Pan/Glass Door Drawers	45
<b>M3-Series</b>	
Undercounter Refrigerators & Freezers	50




Food Prep Tables

<b>K-Series</b>	
Salad Prep Tables/Pizza Tables	60
<b>M3-Series</b>	
Salad Prep Tables/Mega Top	61
<b>Other Products</b>	
Pizza Tables	62
Chef Base Refrigerators & Freezers	66
Sushi Cases	70
Back Bar	71



Show Cases

<b>Bakery Cases</b>	
Rectangle Bakery Cases/Round Bakery Cases	75
Bakery Cases High / Combi Show Cases	84
<b>Sandwich Cases</b>	87
<b>Chocolate Cases</b>	97
<b>Open Cases</b>	
Open Cases Slim/Open Cases High/ Open Round Cases	100

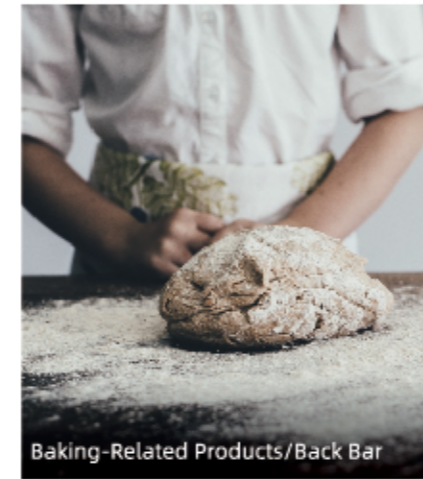

Baking-Related Products/Back Bar

<b>Dough Freezers/Dough Conditioners</b>	105
<b>Product parameter list</b>	
Reach-In Refrigerators & Freezers	125
Undercounter Refrigerators & Freezers	129
Food Prep Tables	133
Show Cases	136
Gelato Show Cases	137
Baking-Related Products/Back Bar	140
Flash freezer	140
New product	140
Ice machine	141



Blast Chiller

<b>Flash freezer</b>	109
----------------------	-----



Gelato Show Cases

<b>Gelato Show Cases</b>	111
--------------------------	-----



Ice Machine

<b>Ice machine</b>	113
Cube Ice	114
Crescent Ice	118
Snowflake Ice	119
Top Hat Ice	121
Ice Storage Bucket	123


# Reach-In Refrigerators & Freezers

# P Series



- ✓ The elegant stainless-steel exterior and the performance that excels beyond your highest expectations.
- ✓ Using the new ECO-friendly natural refrigerant: R290
- ✓ Achieving Grade 1 in Chinese Energy Efficiency Index.
- ✓ Patented Self-Cleaning Condenser.
- ✓ Built-in sterilization lamp (refrigerator only).
- ✓ High-Voltage Protection Switch.
- ✓ Supporting RTMS application (RS485 interface)

## Self-Cleaning Condenser

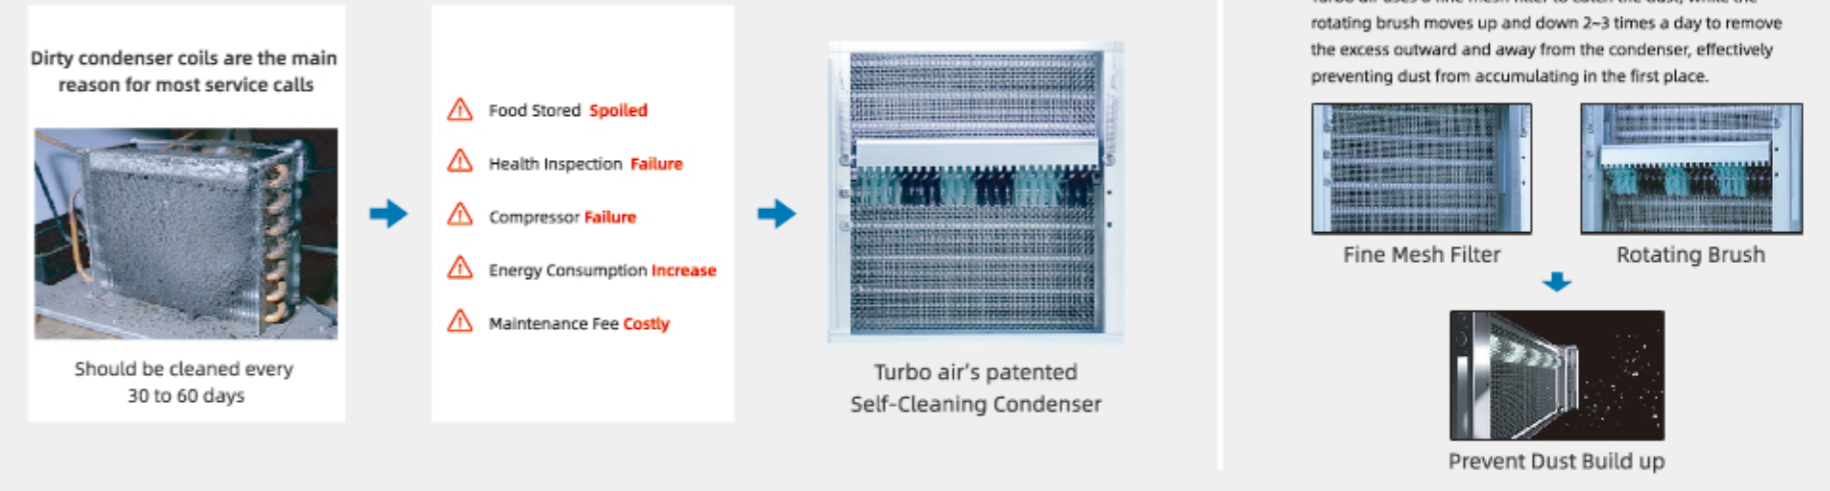

# REACH-IN REFRIGERATORS/FREEZERS

## P-Series

R: 1°C~8°C F: -21°C~-12°C FAN COOLING WxDxH (mm)



PR25-1-N  
PF25-1-N

PR45-2-N  
PF45-2-N

PR65-3-N  
PF65-3-N

PR25-2-N  
PF25-2-N

PR45-4-N  
PF45-4-N

PR65-6-N  
PF65-6-N

Ext. DIM:	640X860X1926
Capacity(L):	574
Power(W):	202 362.5









Ext. DIM:	1260X860X1926
Capacity(L):	1215
Power(W):	220 505.5

Ext. DIM:	1900X860X1926
Capacity(L):	1876
Power(W):	610 1210

Ext. DIM:	640X860X1926
Capacity(L):	572
Power(W):	209.3 374.6

Ext. DIM:	1260X860X1926
Capacity(L):	1210
Power(W):	233.2 527.5

Ext. DIM:	1900X860X1926
Capacity(L):	1868
Power(W):	615 1215

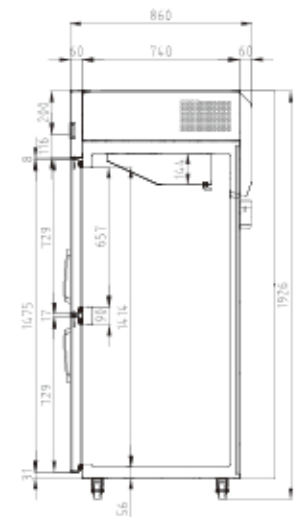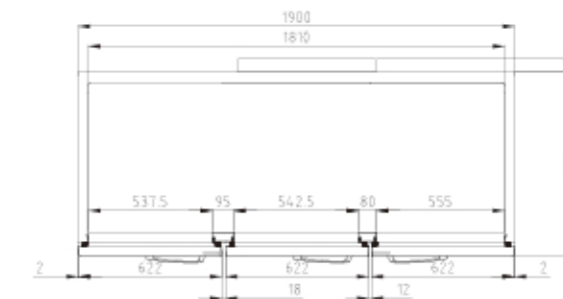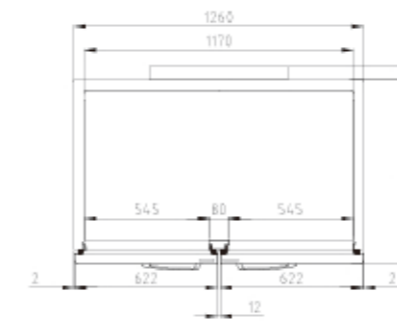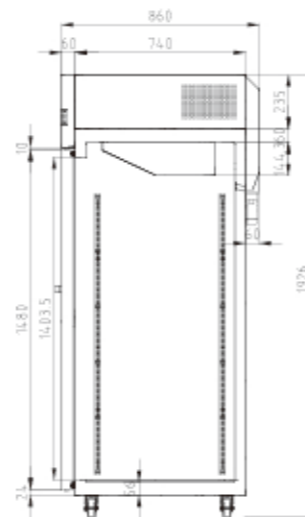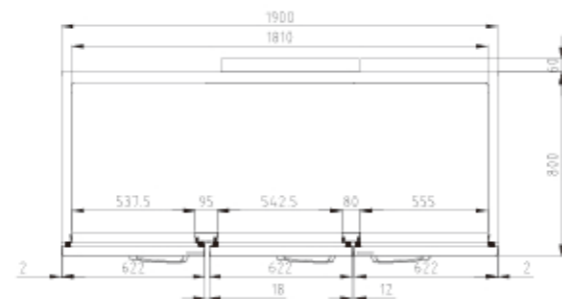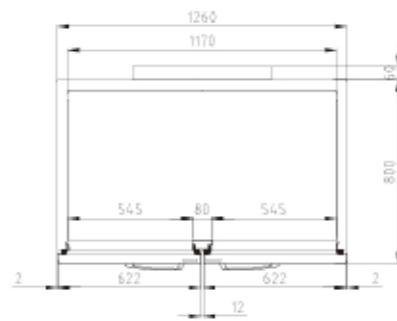

# Vertical Freezer Grade 1 Energy Efficiency Products

VERTICAL FREEZER **GRADE 1 ENERGY EFFICIENCY** PRODUCTS

R: 1°C~8°C 
 F: -21°C~-12°C 
 FAN COOLING 
 WxDxH (mm)




KR25-1-N  
 KF25-1-N

Ext. DIM:	640x860x1926
Capacity(L):	574
Power(W):	163.5 297.4





KR45-2-N  
 KF45-2-N

Ext. DIM:	1260x860x1926
Capacity(L):	1215
Power(W):	276 432



KR65-3-N  
 KF65-3-N


Ext. DIM:	1900x860x1926
Capacity(L):	1876
Power(W):	350 821.8

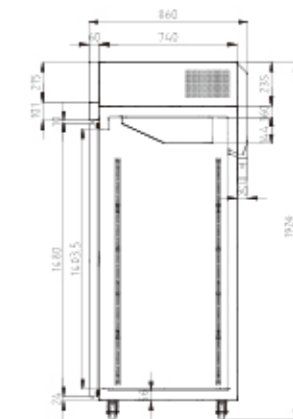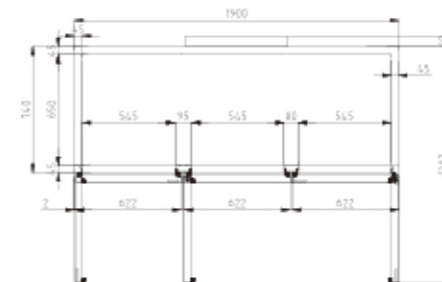




🔒 KR25-2-N  
❄️ KF25-2-N

Ext. DIM:	640x860x1926
Capacity(L):	572
Power(W):	🔌 171.9 ❄️ 303.8





🔒 KR45-4-N  
❄️ KF45-4-N

Ext. DIM:	1260x860x1926
Capacity(L):	1210
Power(W):	🔌 274 ❄️ 455.8




🔒 KR65-6-N  
❄️ KF65-6-N

Ext. DIM:	1900x860x1926
Capacity(L):	1868
Power(W):	🔌 352 ❄️ 821.2

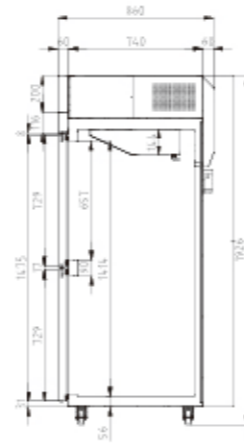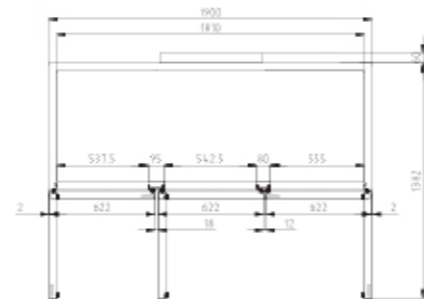


🔒 KR25-1G-N  
❄️ KF25-1G-N

Ext. DIM:	640x860x1926
Capacity(L):	574
Power(W):	🔌 270 ❄️ 452

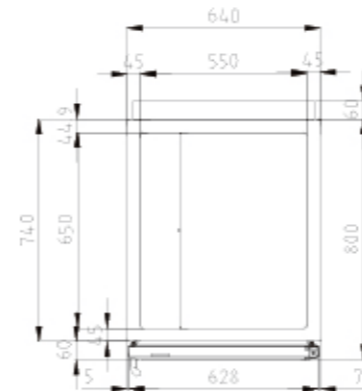


🔒 KR45-2G-N  
❄️ KF45-2G-N

Ext. DIM:	1260x860x1926
Capacity(L):	1215
Power(W):	🔌 438 ❄️ 728.9

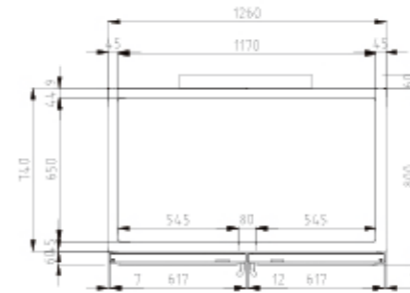

🔒 KR65-3G-N

Ext. DIM:	1900x860x1926
Capacity(L):	1876
Power(W):	🔌 646.9

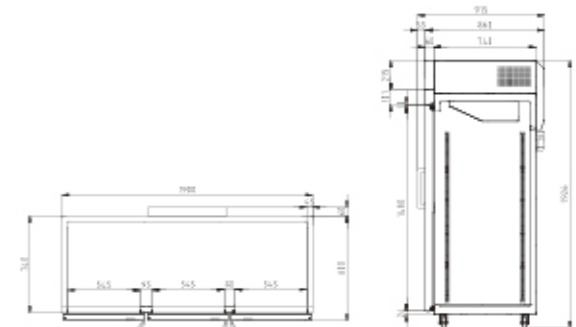



# Reach-In Refrigerators & Freezers

K Series  
M3 Series



Fan Control Cooling System




Digital temperature control & monitor



Easy Grip Recessed Door Handle



LED Interior Lighting

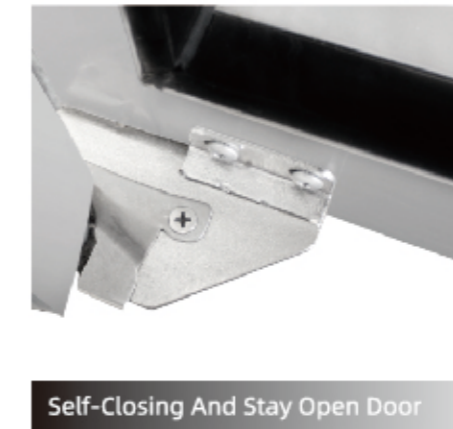


Self-Closing And Stay Open Door



Highly Efficient Refrigeration System



Drain Water Evaporation System

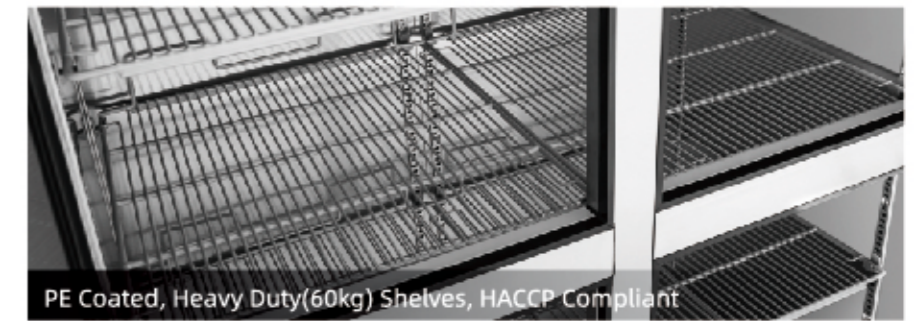

PE Coated, Heavy Duty(60kg) Shelves, HACCP Compliant

# REACH-IN REFRIGERATORS/FREEZERS


## K-Series

R: 1°C~8°C F: -21°C~-12°C FAN COOLING WxDxH (mm)




🔥 KR25-1  
❄️ KF25-1

Ext. DIM:	640x860x1926
Capacity(L):	574
Power(W):	🔥 314 ❄️ 496





🔥 KR45-2  
❄️ KF45-2

Ext. DIM:	1260x860x1926
Capacity(L):	1215
Power(W):	🔥 366 ❄️ 774



🔥 KR65-3  
❄️ KF65-3

Ext. DIM:	1900x860x1926
Capacity(L):	1876
Power(W):	🔥 732 ❄️ 1346

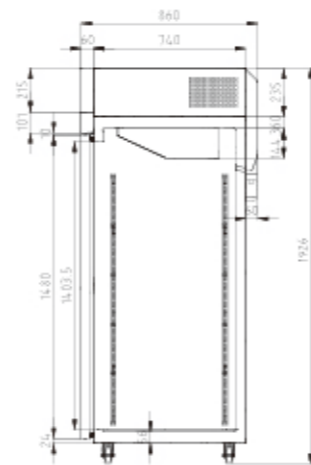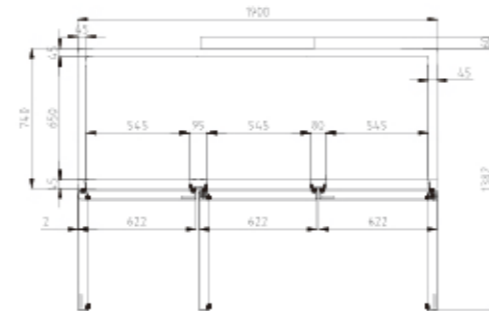


🔥 KR25-2  
❄️ KF25-2

Ext. DIM:	640x860x1926
Capacity(L):	572
Power(W):	🔥 314 ❄️ 496





🔥 KR45-4  
❄️ KF45-4

Ext. DIM:	1260x860x1926
Capacity(L):	1210
Power(W):	🔥 366 ❄️ 774



🔥 KR65-6  
❄️ KF65-6

Ext. DIM:	1900x860x1926
Capacity(L):	1868
Power(W):	🔥 732 ❄️ 1346

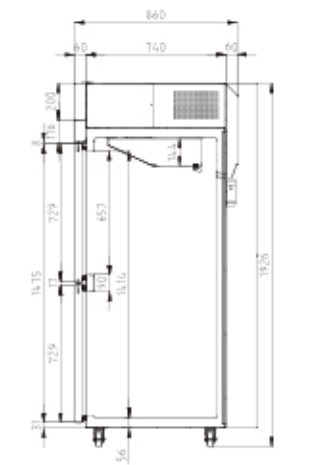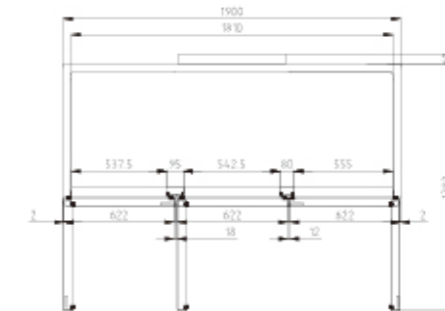

# REACH-INS DUAL TEMP


## K-Series

🌡️ R: 1°C~8°C
❄️ F: -21°C~-12°C
🌿 FAN COOLING
📏 WxDxH (mm)




🌡️❄️ KRF25-2  
❄️🌡️ KFR25-2

Ext. DIM:	640x860x1926
Capacity(L):	242/222
Power(W):	366





🌡️❄️ KRF45-2H

Ext. DIM:	1260x860x1926
Capacity(L):	576/576
Power(W):	732



🌡️❄️ KRF65-3

Ext. DIM:	1900x860x1926
Capacity(L):	575/1235
Power(W):	1098

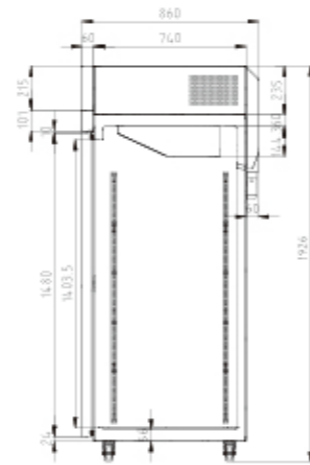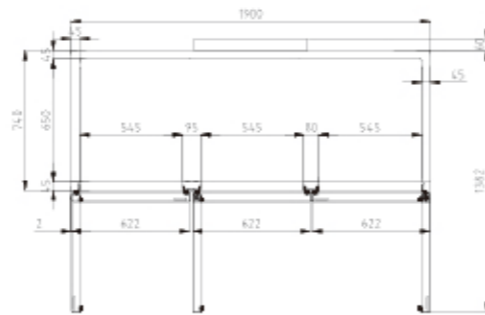


🌡️❄️ KRF45-4H

Ext. DIM:	1260x860x1926
Capacity(L):	576/576
Power(W):	732





🌡️❄️ KRF65-6

Ext. DIM:	1900x860x1926
Capacity(L):	575/1235
Power(W):	1098



🌡️❄️ KRF65-6F

Ext. DIM:	1900x860x1926
Capacity(L):	575/1235
Power(W):	1098

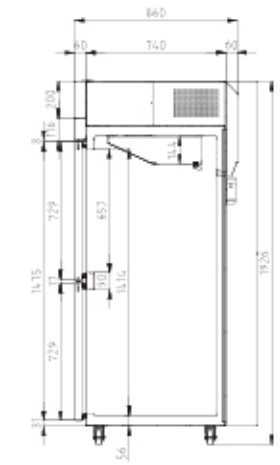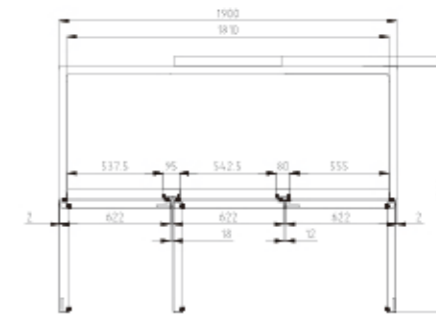

# REACH-INS BUN PAN

## K-Series

🌡️ R: 1°C~8°C
❄️ F: -21°C~-12°C
🌿 FAN COOLING
📏 WxDxH (mm)



🌡️ KR25-1P  
❄️ KF25-1P

Ext. DIM:	640x860x1926
Capacity(L):	574
Power(W):	🌡️ 314 ❄️ 496
# of pans:	14 pans

🌡️ KR45-2P  
❄️ KF45-2P

Ext. DIM:	1260x860x1926
Capacity(L):	1215
Power(W):	🌡️ 366 ❄️ 774
# of pans:	2x14 pans

🌡️ KR65-3P  
❄️ KF65-3P

Ext. DIM:	1900x860x1926
Capacity(L):	1876
Power(W):	🌡️ 732 ❄️ 1346
# of pans:	3x14 pans

🌡️ KR25-2P  
❄️ KF25-2P









Ext. DIM:	640x860x1926
Capacity(L):	572
Power(W):	🌡️ 314 ❄️ 496
# of pans:	14 pans

🌡️ KR45-4P  
❄️ KF45-4P

Ext. DIM:	1260x860x1926
Capacity(L):	1210
Power(W):	🌡️ 366 ❄️ 774
# of pans:	2x14 pans

🌡️ KR65-6P  
❄️ KF65-6P

Ext. DIM:	1900x860x1926
Capacity(L):	1868
Power(W):	🌡️ 732 ❄️ 1346
# of pans:	3x14 pans

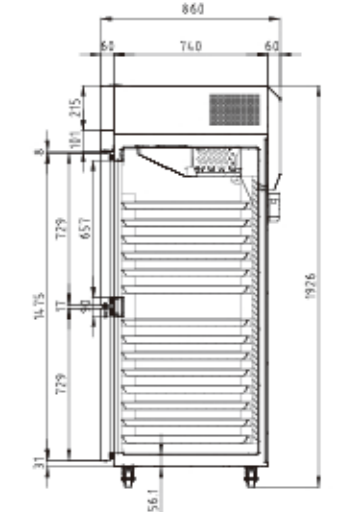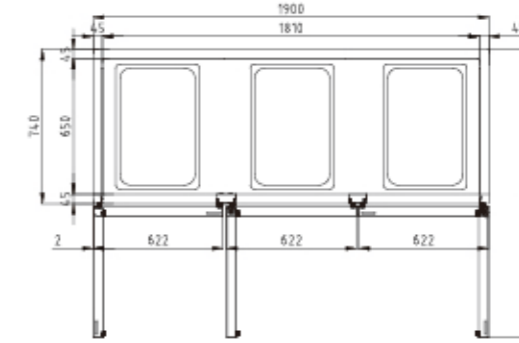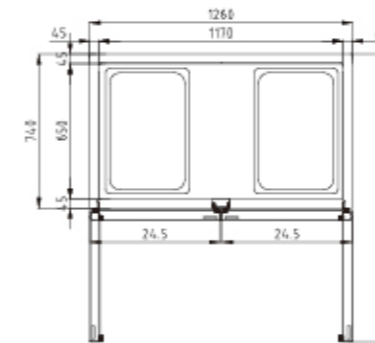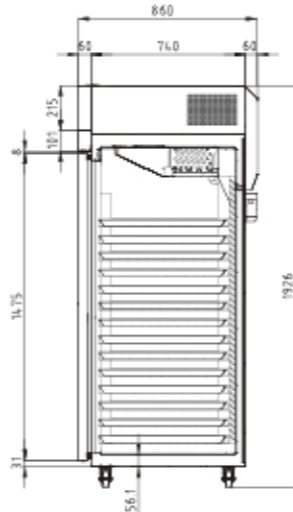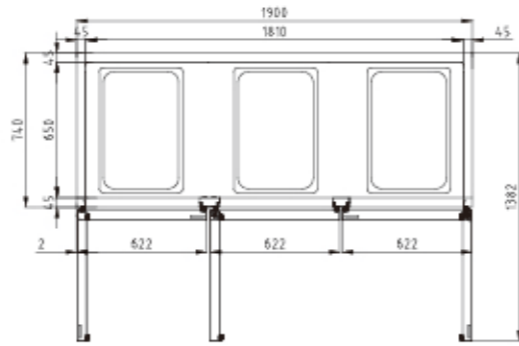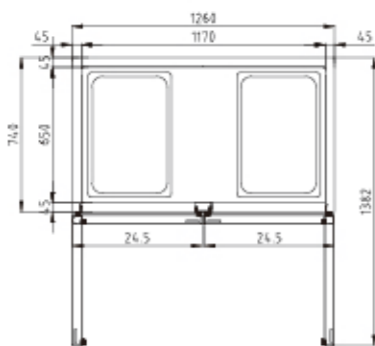

# REACH-INS BUN PAN DUAL TEMP


## K-Series

🔥 R: 1°C~8°C
❄️ F: -21°C~-12°C
🌿 FAN COOLING
📏 WxDxH (mm)




🔥❄️ KRF25-2P

Ext. DIM:	640x860x1926
Capacity(L):	242/222
Power(W):	366
# of pans:	2x6 pans

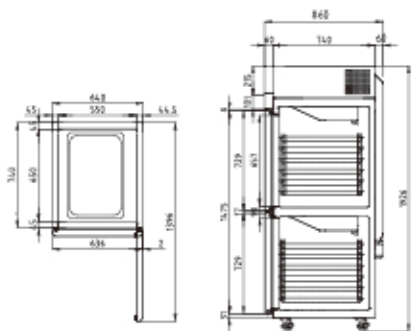



🔥❄️ KRF45-2HP

Ext. DIM:	1260x860x1926
Capacity(L):	576/576
Power(W):	732
# of pans:	2x14 pans




🔥❄️ KRF65-3P

Ext. DIM:	1900x860x1926
Capacity(L):	575/1235
Power(W):	1098
# of pans:	3x14 pans

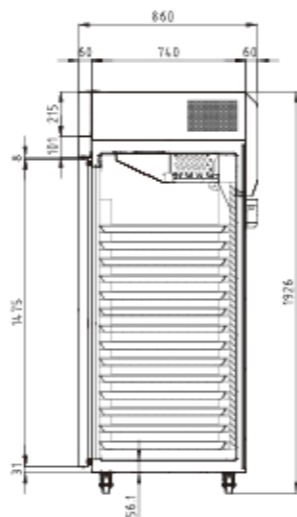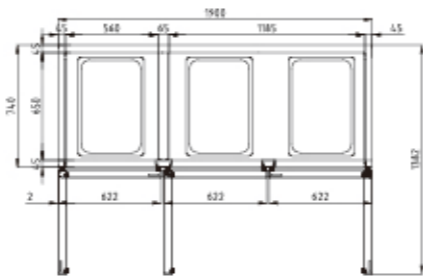


🔥❄️ KRF45-4HP

Ext. DIM:	1260x860x1926
Capacity(L):	576/576
Power(W):	732
# of pans:	2x14 pans





🔥❄️ KRF65-6P

Ext. DIM:	1900x860x1926
Capacity(L):	575/1235
Power(W):	1098
# of pans:	3x14 pans

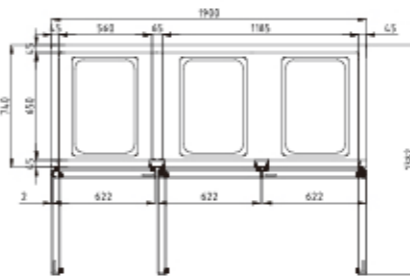

🔥❄️ KRF65-6FP

Ext. DIM:	1900x860x1926
Capacity(L):	575/1235
Power(W):	1098
# of pans:	3x14 pans

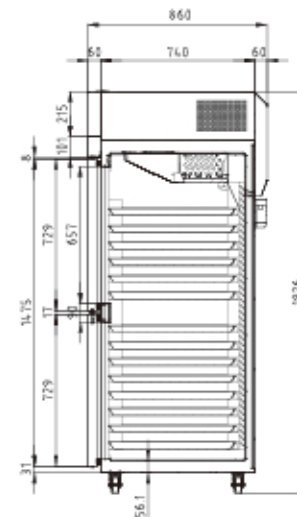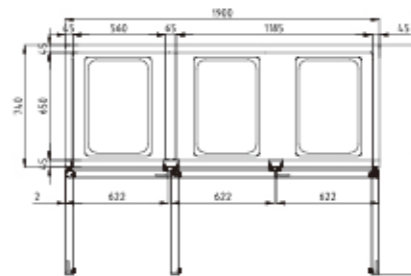

# REACH-INS GLASS DOOR

## K-Series

R: 1°C~8°C F: -21°C~-12°C FAN COOLING WxDxH (mm)



**KR25-1G**  
**KF25-1G**

**KR45-2G**  
**KF45-2G**

**KR65-3G**

**KR25-2G**  
**KF25-2G**

**KR45-4G**  
**KF45-4G**

**KR65-6G**

Ext. DIM:	640x860x1926
Capacity(L):	574
Power(W):	314 660








Ext. DIM:	1260x860x1926
Capacity(L):	1215
Power(W):	366 976

Ext. DIM:	1900x860x1926
Capacity(L):	1876
Power(W):	732

Ext. DIM:	640x860x1926
Capacity(L):	572
Power(W):	314 660

Ext. DIM:	1260x860x1926
Capacity(L):	1210
Power(W):	366 976

Ext. DIM:	1900x860x1926
Capacity(L):	1868
Power(W):	732

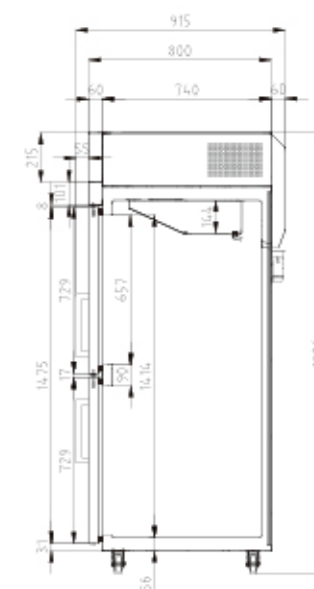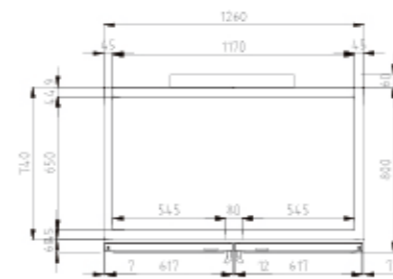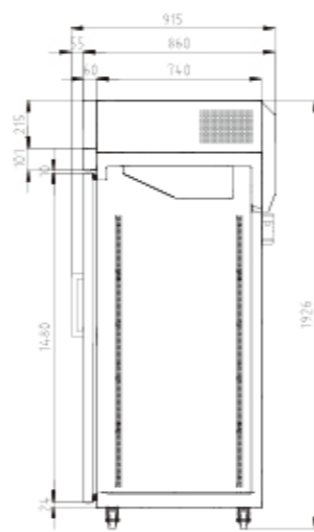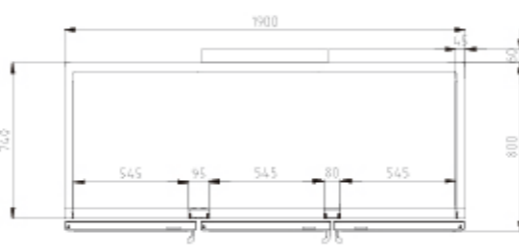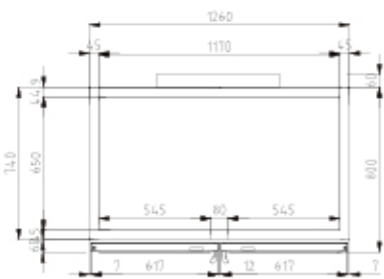

# REACH-IN REFRIGERATORS/FREEZERS


## M3-Series

R: 1°C~8°C F: -25°C~-17°C FAN COOLING WxDxH (mm)




CM3R24-1  
CM3F24-1

Ext. DIM:	730x840x2106
Capacity(L):	665
Power(W):	338 500





CM3R47-2  
CM3F47-2

Ext. DIM:	1314x840x2106
Capacity(L):	1277
Power(W):	389 813




CM3R72-3  
CM3F72-3

Ext. DIM:	1976x840x2106
Capacity(L):	1968
Power(W):	490 1050

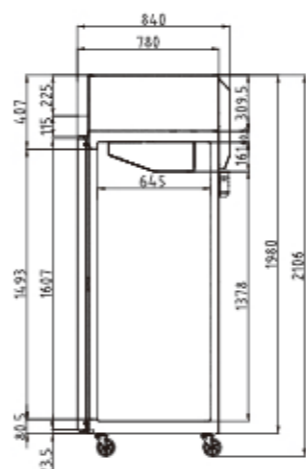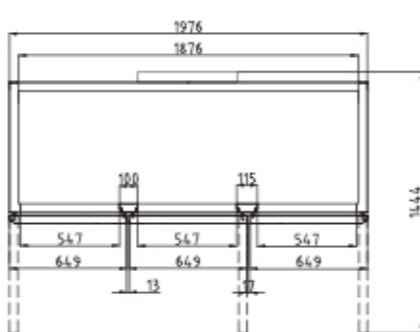


CM3R24-2  
CM3F24-2

Ext. DIM:	730x840x2106
Capacity(L):	665
Power(W):	338 500





CM3R47-4  
CM3F47-4

Ext. DIM:	1314x840x2106
Capacity(L):	1277
Power(W):	389 813



CM3R72-6  
CM3F72-6

Ext. DIM:	1976x840x2106
Capacity(L):	1968
Power(W):	490 1050

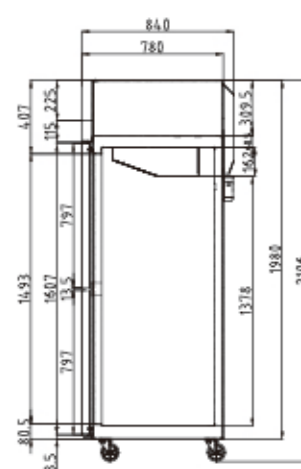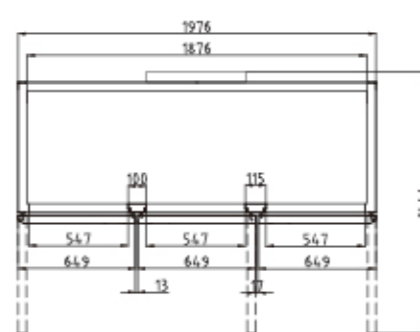



# Undercounters

# P Series



- ✓ The elegant stainless-steel exterior and the performance that excels beyond your highest expectations.
- ✓ Using the new ECO-friendly natural refrigerant: R290.
- ✓ Achieving Grade 1 in Chinese Energy Efficiency Index.
- ✓ Patented Self-Cleaning Condenser
- ✓ Built-in sterilization lamp (refrigerator only)
- ✓ High-Voltage Protection Switch
- ✓ Supporting RTMS application (RS485 interface)
- ✓ Front breathing feather makes it possible to be highly efficient in narrow spaces

## Self-Cleaning Condenser


Dirty condenser coils are the main reason for most service calls



Should be cleaned every 30 to 60 days

- ⚠ Food Stored **Spilled**
- ⚠ Health Inspection **Failure**
- ⚠ Compressor **Failure**
- ⚠ Energy Consumption **Increase**
- ⚠ Maintenance Fee **Costly**


### Solution



Turbo air's patented Self-Cleaning Condenser

### How does it work

Turbo air uses a fine mesh filter to catch the dust, while the rotating brush moves up and down 2-3 times a day to remove the excess outward and away from the condenser, effectively preventing dust from accumulating in the first place.



Fine Mesh Filter



Rotating Brush




Prevent Dust Build Up





🔧 **PUR9-1-N**  
❄️ **PUF9-1-N**

Ext. DIM:	900X700X800
Capacity(L):	198
Power(W):	<span>🔧</span> 158 <span>❄️</span> 246

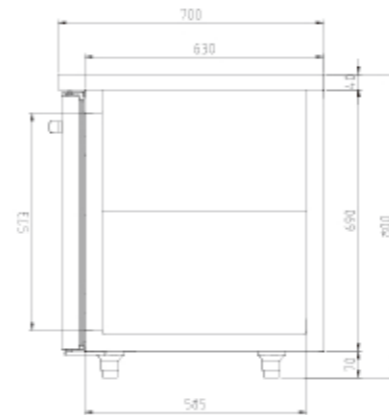



🔧 **PUR15-2-N**  
❄️ **PUF15-2-N**

Ext. DIM:	1500X700X800
Capacity(L):	425
Power(W):	<span>🔧</span> 158 <span>❄️</span> 300

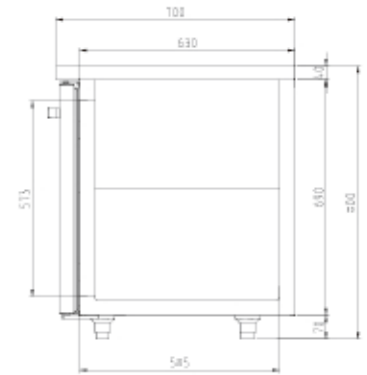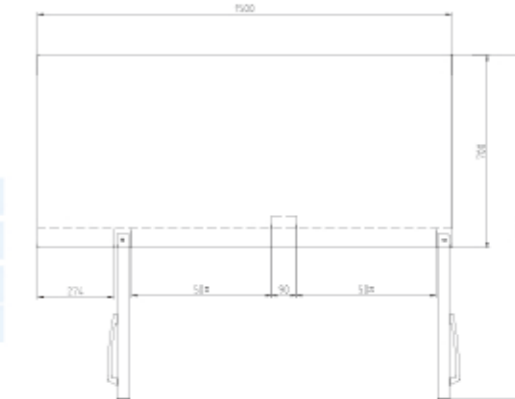



🔧 **PUR12-2-N**  
❄️ **PUF12-2-N**


Ext. DIM:	1200X700X800
Capacity(L):	311
Power(W):	<span>🔧</span> 158 <span>❄️</span> 295

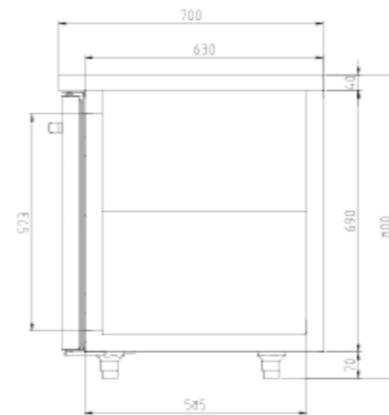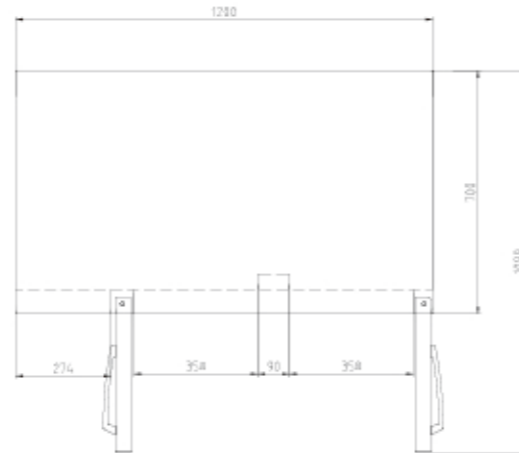

🔧 **PUR18-3-N**  
❄️ **PUF18-3-N**

Ext. DIM:	1800X700X800
Capacity(L):	538
Power(W):	<span>🔧</span> 179 <span>❄️</span> 396

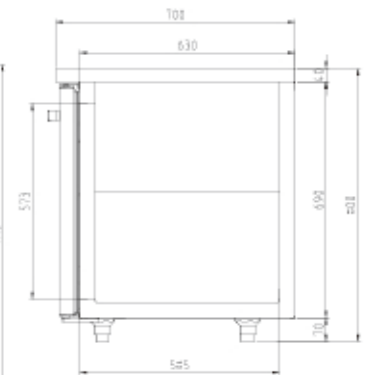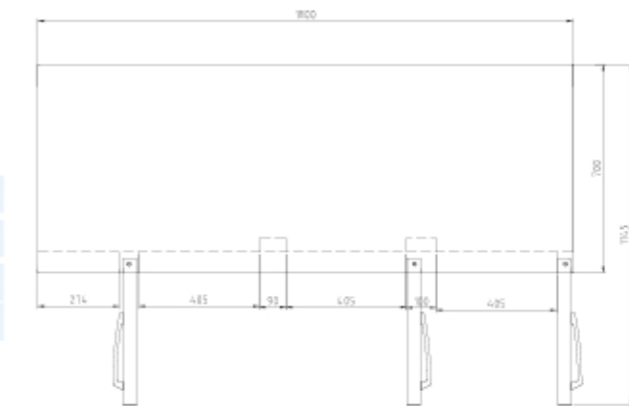

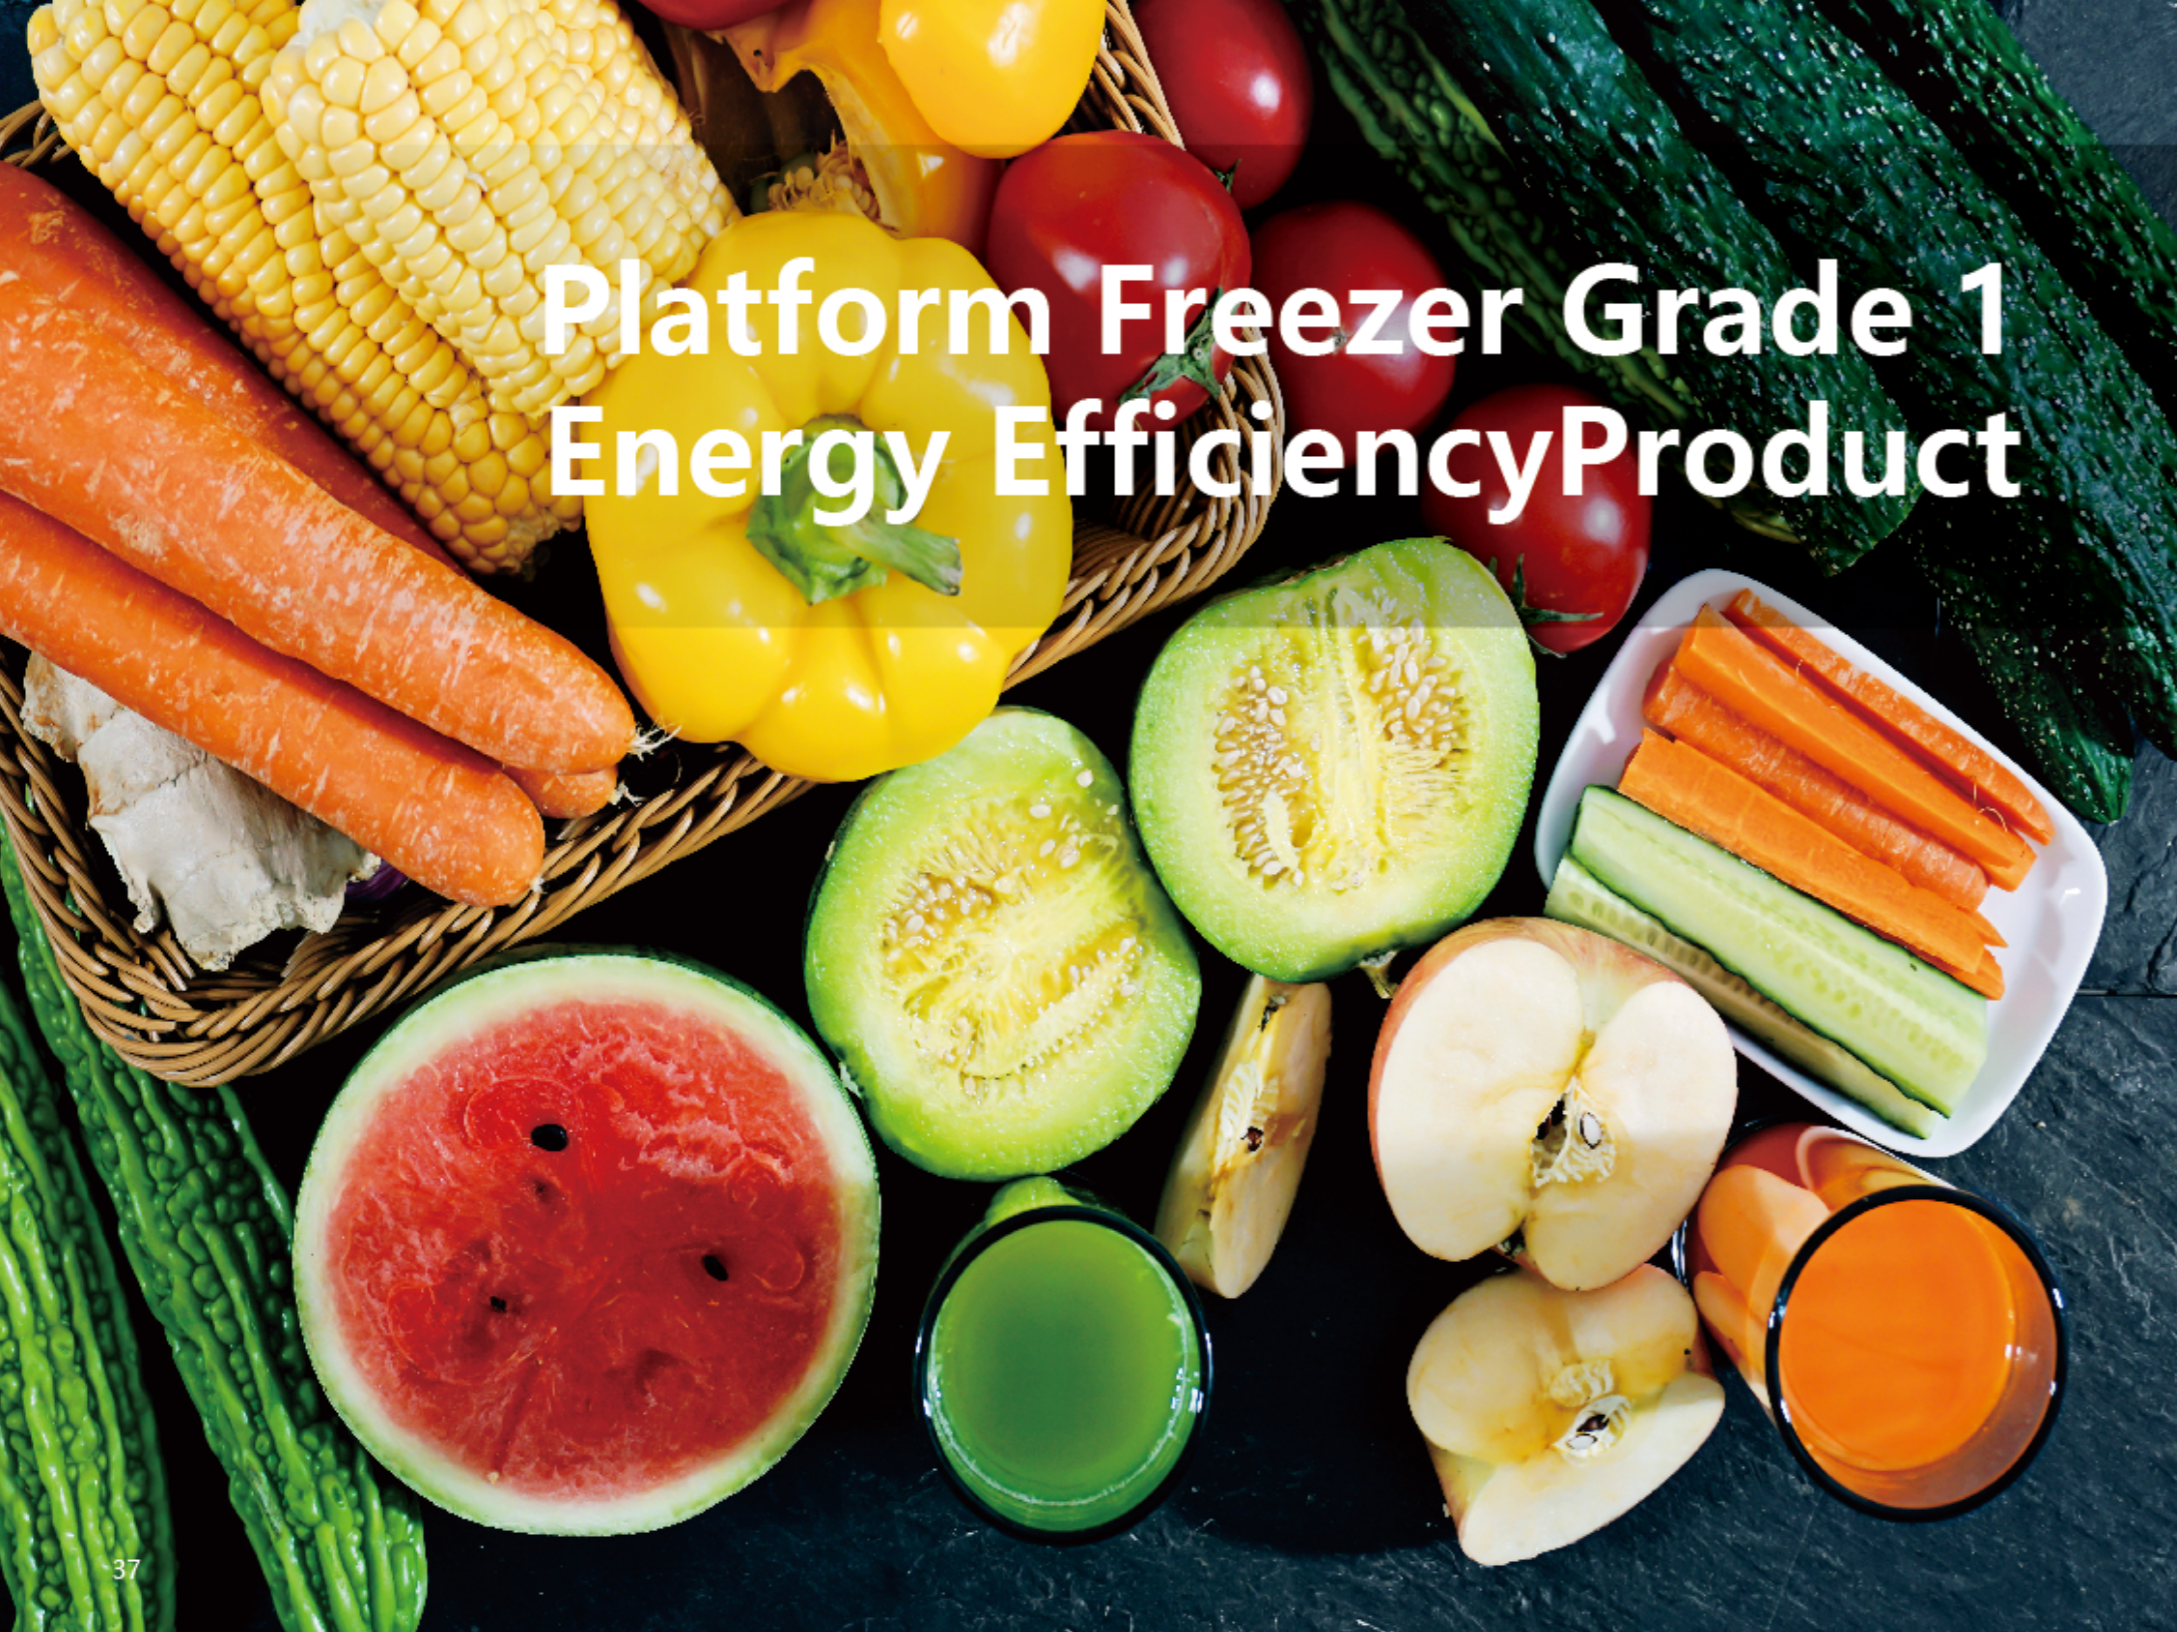

# Platform Freezer Grade 1 Energy Efficiency Product



PLATFORM FREEZER **GRADE 1 ENERGY EFFICIENCY** PRODUCT

R: 1°C~8°C \* F: -21°C~-12°C + FAN COOLING WxDxH (mm)





**KUR9-1-N**  
**KUF9-1-N**

Ext. DIM:	900×700 × 800
Capacity(L):	198
Power(W):	118.8 172.4





**KUR12-2-N**  
**KUF12-2-N**

Ext. DIM:	1200×700 × 800
Capacity(L):	311
Power(W):	144.8 208.3





**KUR15-2-N**  
**KUF15-2-N**

Ext. DIM:	1500×700 × 800
Capacity(L):	425
Power(W):	174 268.6



**KUR18-3-N**  
**KUF18-3-N**


Ext. DIM:	1800×700 × 800
Capacity(L):	538
Power(W):	189.5 325.6

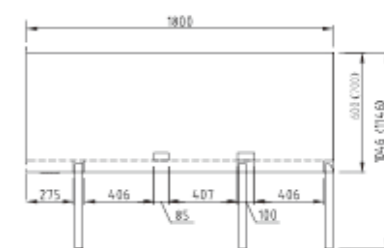





**KUR9-1S-N**  
**KUF9-1S-N**

Ext. DIM:	900×600×800
Capacity(L):	149
Power(W):	114.6 166.7




**KUR12-2S-N**  
**KUF12-2S-N**

Ext. DIM:	1200×600×800
Capacity(L):	234
Power(W):	140.6 218



**KUR15-2S-N**  
**KUF15-2S-N**

Ext. DIM:	1500×600×800
Capacity(L):	319
Power(W):	171.9 262.8





**KUR18-3S-N**  
**KUF18-3S-N**

Ext. DIM:	1800×600×800
Capacity(L):	400
Power(W):	182.3 285.3





**KUR15-2P-N**  
**KUF15-2P-N**

Ext. DIM:	1500×760×800
Capacity(L):	444
Power(W):	174 268.5
# of pans:	2x7pan

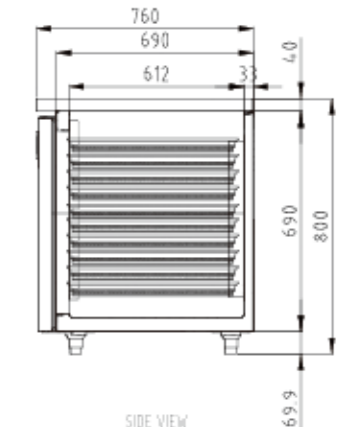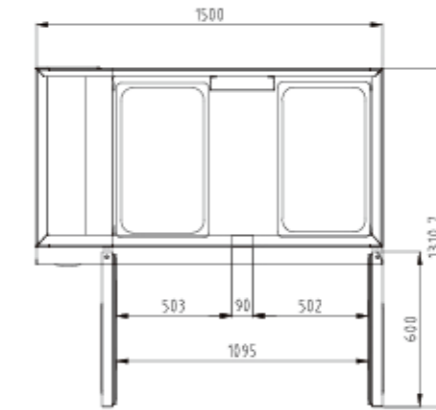

**KUR18-3P-N**  
**KUF18-3P-N**



Ext. DIM:	1800×760×800
Capacity(L):	562
Power(W):	189.6 325.6
# of pans:	3x7pan

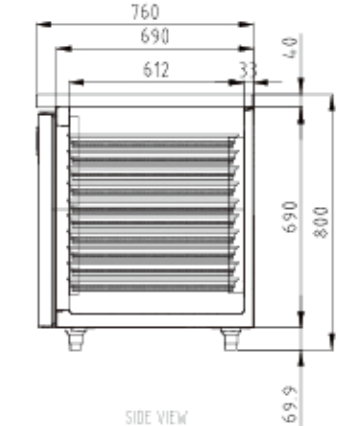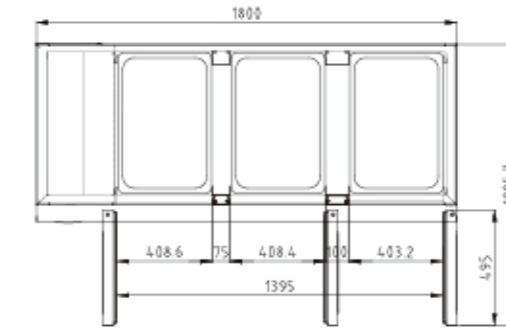





**KGR9-1-N**

Ext. DIM:	900×700×800
Capacity(L):	198
Power(W):	131





**KGR12-2-N**

Ext. DIM:	1200×700×800
Capacity(L):	311
Power(W):	182





**KGR15-2-N**

Ext. DIM:	1500×700×800
Capacity(L):	425
Power(W):	257.2




**KGR18-3-N**

Ext. DIM:	1800×700×800
Capacity(L):	538
Power(W):	311

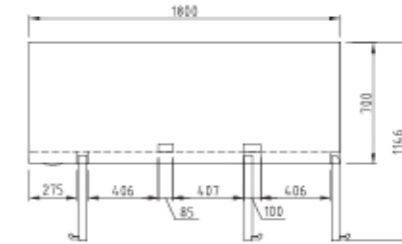

# Undercounters Drawers

K Series  
M3 Series

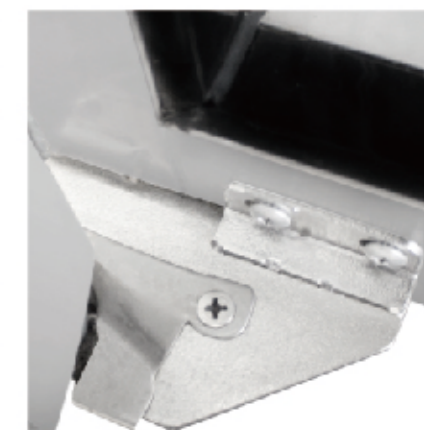

# UNDERCOUNTER REFRIGERATORS/FREEZERS

## K-Series


# UNDERCOUNTERS DUAL TEMP

R: 1°C~8°C 
 F: -21°C~-12°C 
 FAN COOLING 
 WxDxH (mm)



**KUR9-1**  
**KUF9-1**

Ext. DIM:	900×600(700)×800
Capacity(L):	149 (198)
Power(W):	314 366





SIDF VIFW(DPTH 600mm)



**KUR12-2**  
**KUF12-2**

Ext. DIM:	1200×600(700)×800
Capacity(L):	234 (311)
Power(W):	314 613




SIDF VIFW(DPTH 700mm)



**KUR15-2**  
**KUF15-2**

Ext. DIM:	1500×600(700)×800
Capacity(L):	319 (425)
Power(W):	314 613




SIDF VIFW(DPTH 700mm)



**KUR18-3**  
**KUF18-3**

Ext. DIM:	1800×600(700)×800
Capacity(L):	400 (538)
Power(W):	366 613


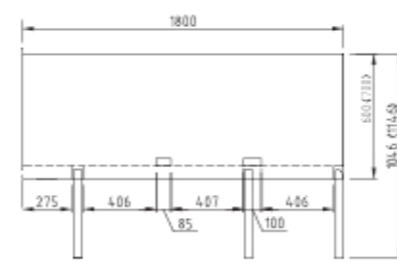


SIDF VIFW(DPTH 700mm)





**KURF12-2**

Ext. DIM:	1200×700×800
Capacity(L):	121/136
Power(W):	316





**KURF15-2**

Ext. DIM:	1500×700×800
Capacity(L):	171/191
Power(W):	336

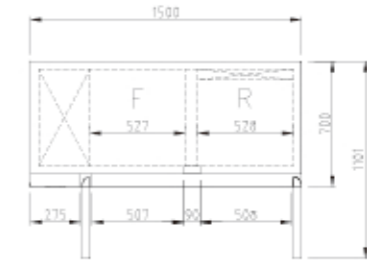

**KURF18-3**

Ext. DIM:	1800×700×800
Capacity(L):	151/287
Power(W):	366

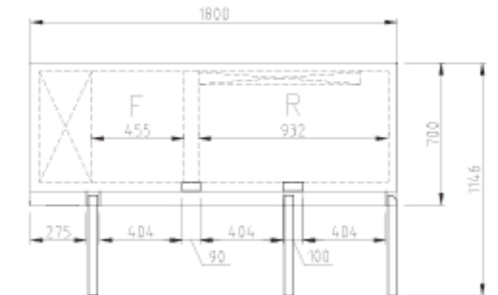

# UNDERCOUNTERS BUN PAN

## K-Series



# UNDERCOUNTERS(GN PAN)

R: 1°C~8°C
F: -21°C~-12°C
FAN COOLING
WxDxH (mm)



🔥 **KUR15-2P**  
❄️ **KUF15-2P**

Ext. DIM:	1500x760x800
Capacity(L):	444
Power(W):	🔥 314 ❄️ 613
# of pans:	2x7 pans

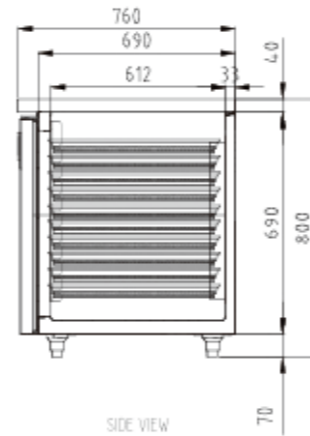
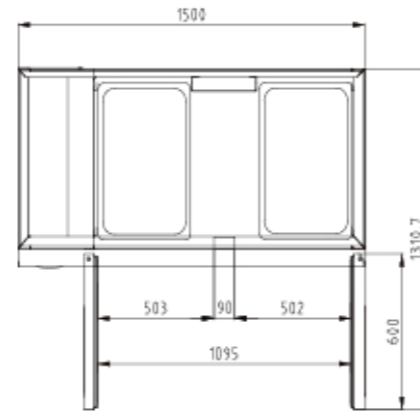


SIDE VIEW



🔥 **KUR18-3P**  
❄️ **KUF18-3P**

Ext. DIM:	1800x760x800
Capacity(L):	562
Power(W):	🔥 366 ❄️ 613
# of pans:	3x7 pans

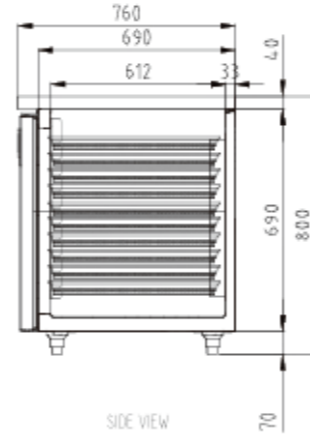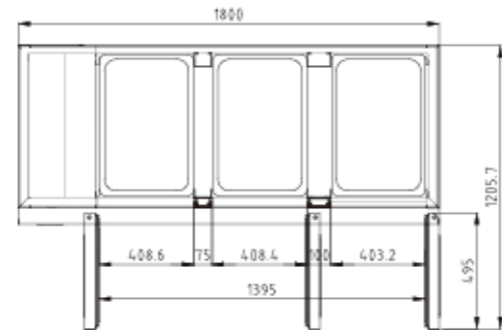


SIDE VIEW





🔥 **KUR9-1(GN)**  
❄️ **KUF9-1(GN)**

Ext. DIM:	900x700x800
Capacity(L):	198
Power(W):	🔥 314 ❄️ 366
# of pans:	2 pans





🔥 **KUR12-2(GN)**  
❄️ **KUF12-2(GN)**

Ext. DIM:	1200x700x800
Capacity(L):	311
Power(W):	🔥 314 ❄️ 613
# of pans:	2x5 pans





🔥 **KUR15-2(GN)**  
❄️ **KUF15-2(GN)**

Ext. DIM:	1500x700x800
Capacity(L):	425
Power(W):	🔥 314 ❄️ 613
# of pans:	2x5 pans



🔥 **KUR18-3(GN)**  
❄️ **KUF18-3(GN)**

Ext. DIM:	1800x700x800
Capacity(L):	538
Power(W):	🔥 366 ❄️ 613
# of pans:	3x5 pans

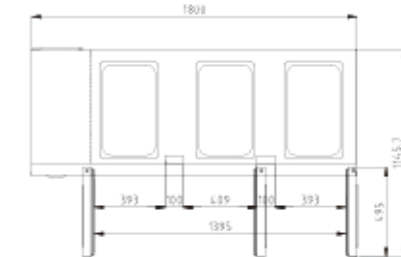

# UNDERCOUNTERS GLASS DOOR

# K-Series


# UNDERCOUNTER DRAWERS

R: 1°C~8°C   F: -21°C~-12°C   FAN COOLING   WxDxH (mm)




**KGR9-1**

Ext. DIM:	900×700×800
Capacity(L):	198
Power(W):	314

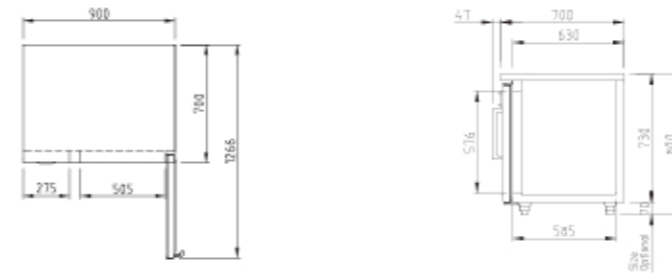


**KGR12-2**

Ext. DIM:	1200×700×800
Capacity(L):	311
Power(W):	314

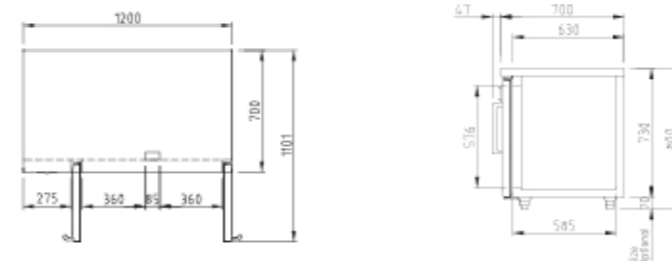


**KGR15-2**

Ext. DIM:	1500×700×800
Capacity(L):	425
Power(W):	314

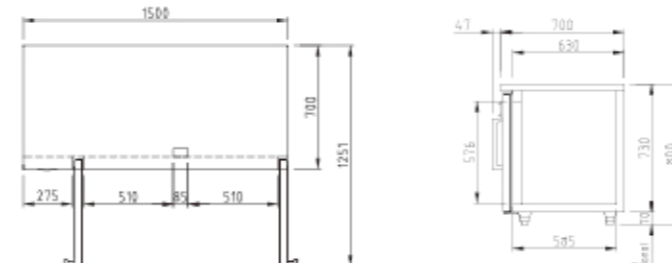


**KGR18-3**

Ext. DIM:	1800×700×800
Capacity(L):	538
Power(W):	366

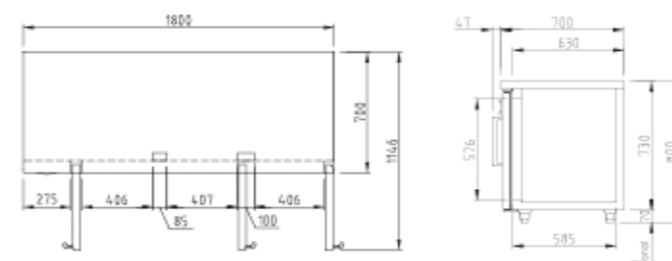


**KUR9-2D-2**  
**KUF9-2D-2**

Ext. DIM:	900×700×800
Capacity(L):	198
Power(W):	314 366

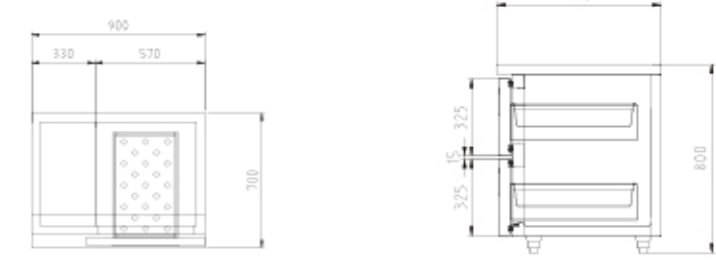


**KUR12-2D-2**  
**KUF12-2D-2**

Ext. DIM:	1200×700×800
Capacity(L):	311
Power(W):	314 366

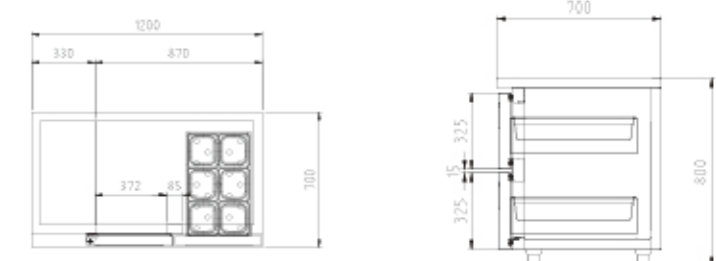


**KUR12-2D-4**  
**KUF12-2D-4**

Ext. DIM:	1200×700×800
Capacity(L):	311
Power(W):	314 366

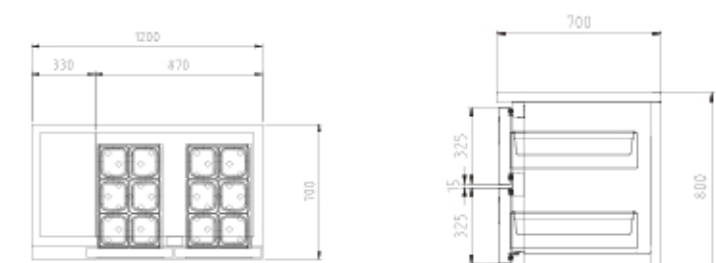

**KUR15-2D-2**  
**KUF15-2D-2**

Ext. DIM:	1500×700×800
Capacity(L):	425
Power(W):	314 366

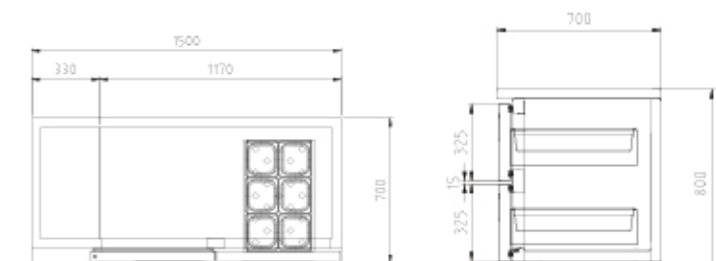

# UNDERCOUNTER DRAWERS

## K-Series


# UNDERCOUNTER DRAWERS

R: 1°C~8°C
F: -21°C~-12°C
FAN COOLING
WxDxH (mm)




🔥 **KUR15-2D-4**  
❄️ **KUF15-2D-4**

Ext. DIM:	1500×700×800
Capacity(L):	425
Power(W):	<span>🔥</span> 314 <span>❄️</span> 366

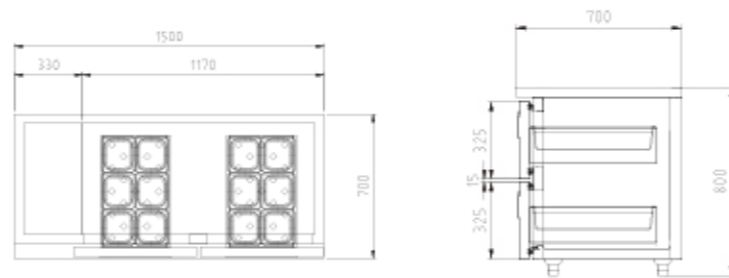


🔥 **KUR18-2D-2**

Ext. DIM:	1800×700×800
Capacity(L):	538
Power(W):	366

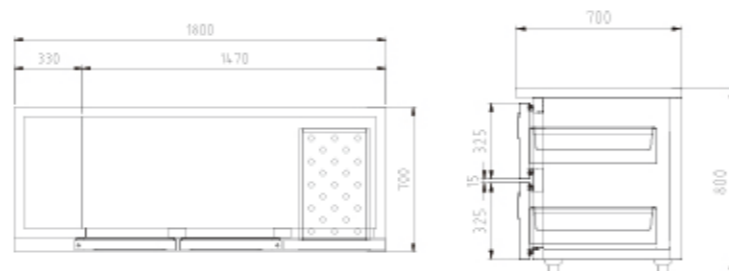


🔥 **KUR18-2D-4**

Ext. DIM:	1800×700×800
Capacity(L):	538
Power(W):	366

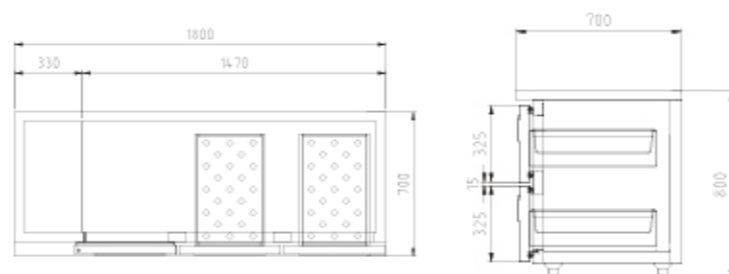


🔥 **KUR18-2D-6**

Ext. DIM:	1800×700×800
Capacity(L):	538
Power(W):	366

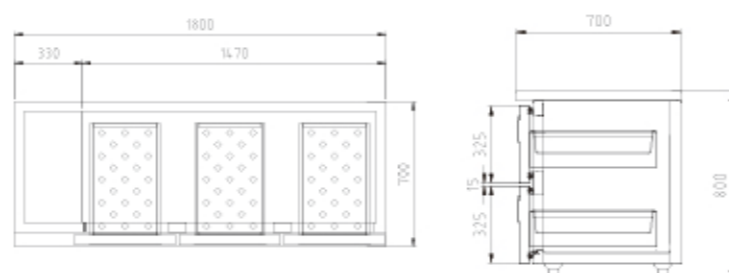


🔥 **KUR9-3D-3**  
❄️ **KUF9-3D-3**

Ext. DIM:	900×700×800
Capacity(L):	198
Power(W):	<span>🔥</span> 314 <span>❄️</span> 366

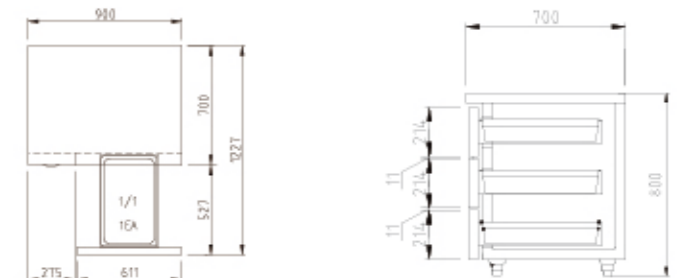


🔥 **KUR12-3D-3**  
❄️ **KUF12-3D-3**

Ext. DIM:	1200×700×800
Capacity(L):	311
Power(W):	<span>🔥</span> 314 <span>❄️</span> 366

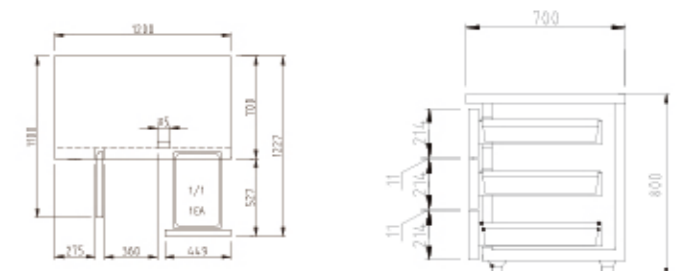


🔥 **KUR12-3D-6**  
❄️ **KUF12-3D-6**

Ext. DIM:	1200×700×800
Capacity(L):	311
Power(W):	<span>🔥</span> 314 <span>❄️</span> 366

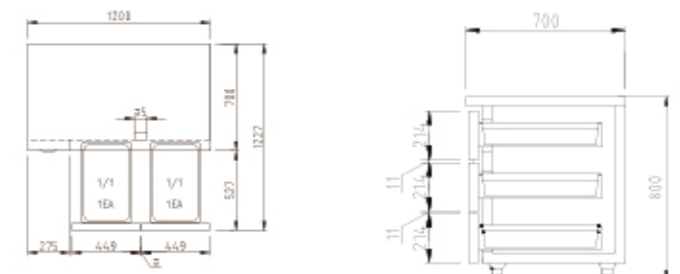

🔥 **KUR15-3D-3**  
❄️ **KUF15-3D-3**

Ext. DIM:	1500×700×800
Capacity(L):	425
Power(W):	<span>🔥</span> 314 <span>❄️</span> 366

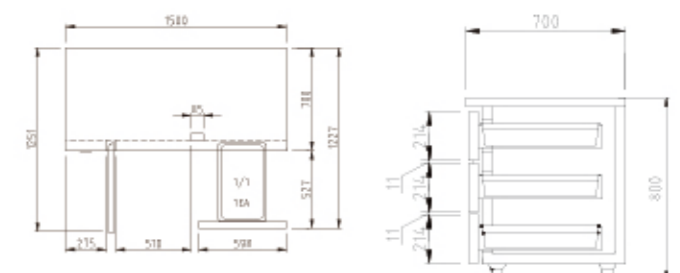

# UNDERCOUNTER DRAWERS


## K-Series

R: 1°C~8°C 
 F: -21°C~-12°C 
 FAN COOLING 
 WxDxH (mm)




**KUR15-3D-6**  
**KUF15-3D-6**

Ext. DIM:	1500×700×800
Capacity(L):	425
Power(W):	314 366

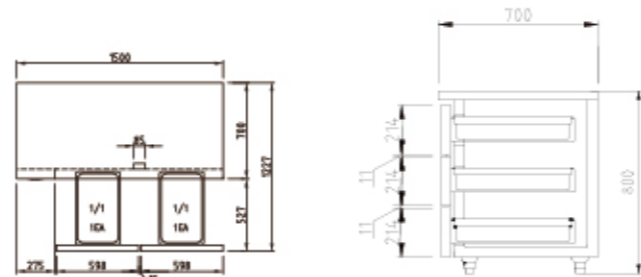


**KUR18-3D-3**

Ext. DIM:	1800×700×800
Capacity(L):	538
Power(W):	366

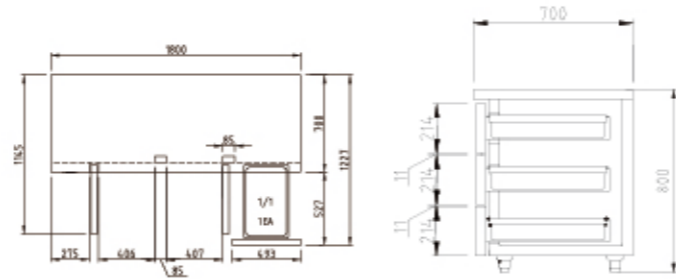


**KUR18-3D-6**

Ext. DIM:	1800×700×800
Capacity(L):	538
Power(W):	366

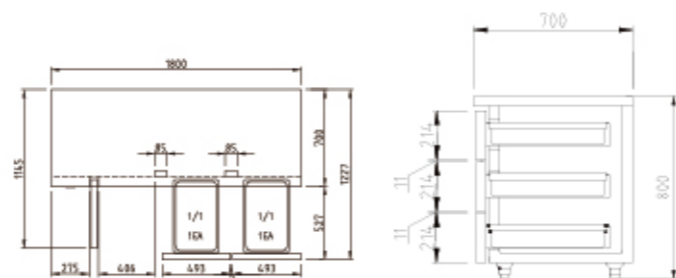

**KUR18-3D-9**

Ext. DIM:	1800×700×800
Capacity(L):	538
Power(W):	366

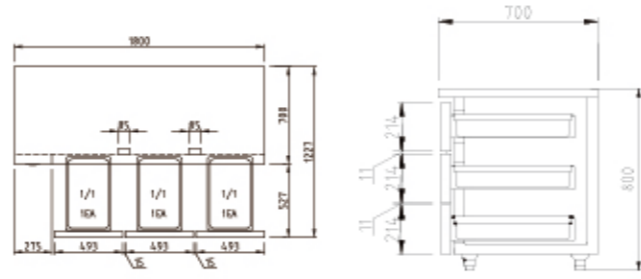

# UNDERCOUNTERS


## M3-Series

R: 1°C~8°C 
 F: -25°C~-17°C 
 FAN COOLING 
 WxDxH (mm)




**CMUR-28**  
**CMUF-28**

Ext. DIM:	698×762×903
Capacity(L):	184
Power(W):	314 314

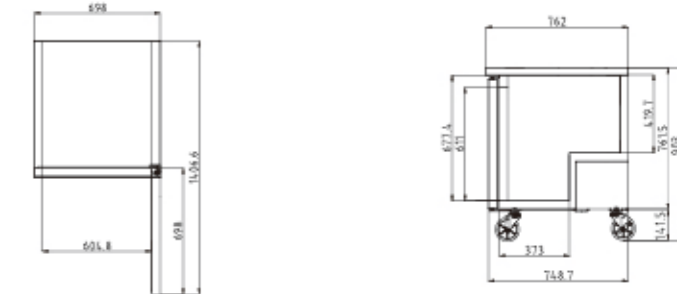


**CMUR-48**  
**CMUF-48**

Ext. DIM:	1225×762×903
Capacity(L):	340
Power(W):	366 477

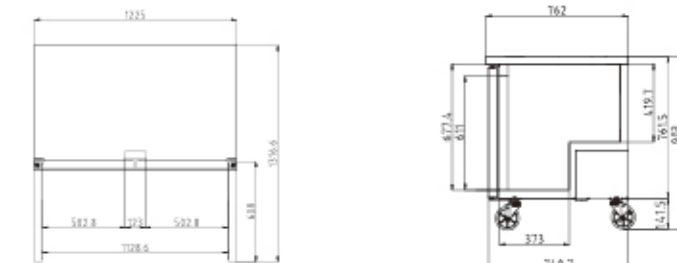


**CMUR-60**  
**CMUF-60**

Ext. DIM:	1530×762×903
Capacity(L):	506
Power(W):	440 477

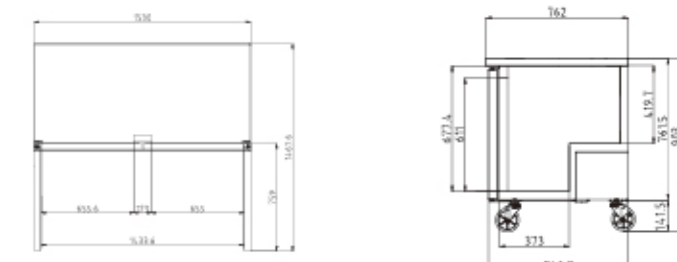

**CMUR-72**

Ext. DIM:	1846×762×903
Capacity(L):	538
Power(W):	440

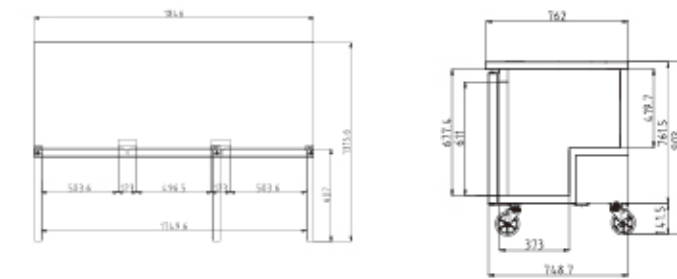

# UNDERCOUNTER DRAWERS


## M3-Series

# UNDERCOUNTERS LOW BOY


R: 1°C~8°C
F: -25°C~-17°C
FAN COOLING
WxDxH (mm)




	<b>CMUR-28-D2</b>	Ext. DIM: 698x762x903
	<b>CMUF-28-D2</b>	Capacity(L): 184
	Power(W):	314
		366

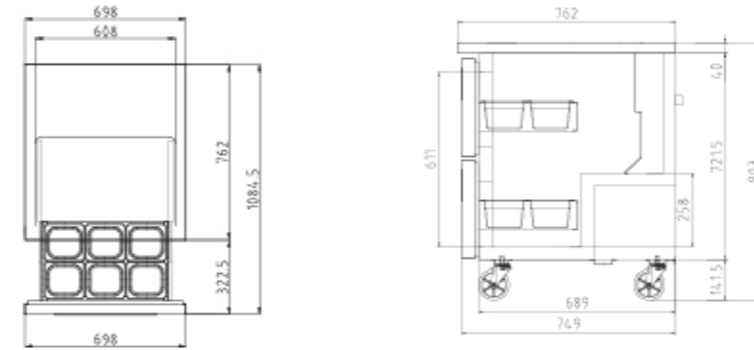


	<b>CMUR-48-D2</b>	Ext. DIM: 1225x762x903
	<b>CMUF-48-D2</b>	Capacity(L): 340
	Power(W):	366
		477

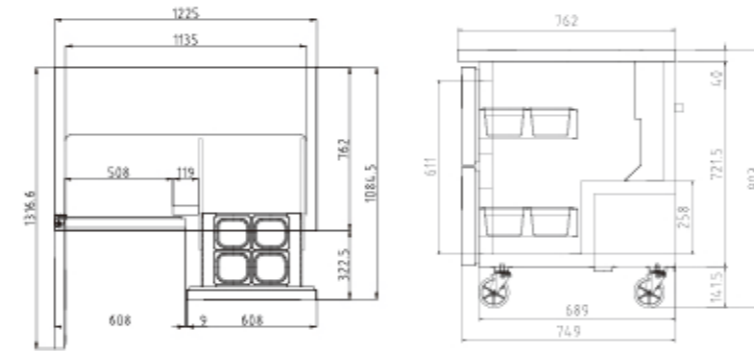


	<b>CMUR-48-D4</b>	Ext. DIM: 1225x762x903
	<b>CMUF-48-D4</b>	Capacity(L): 340
	Power(W):	366
		477

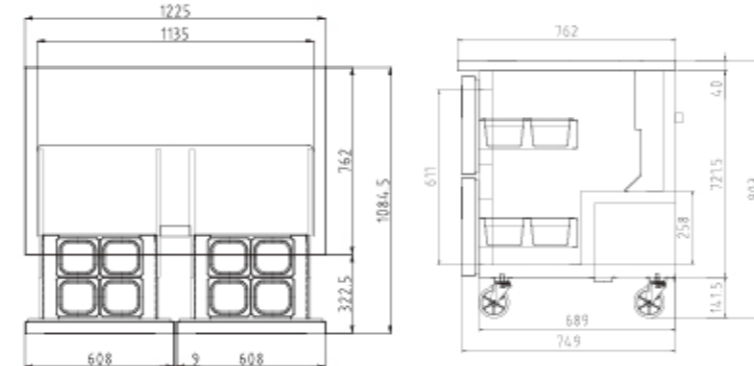

	<b>CMUR-28L</b>	Ext. DIM: 698x762x771
	Capacity(L):	175
	Power(W):	314

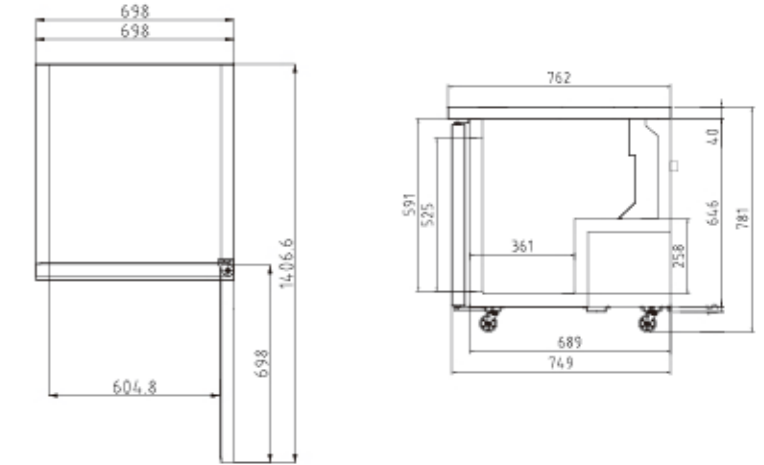

	<b>CMUR-36L</b>	Ext. DIM: 923x762x771
	Capacity(L):	236
	Power(W):	314

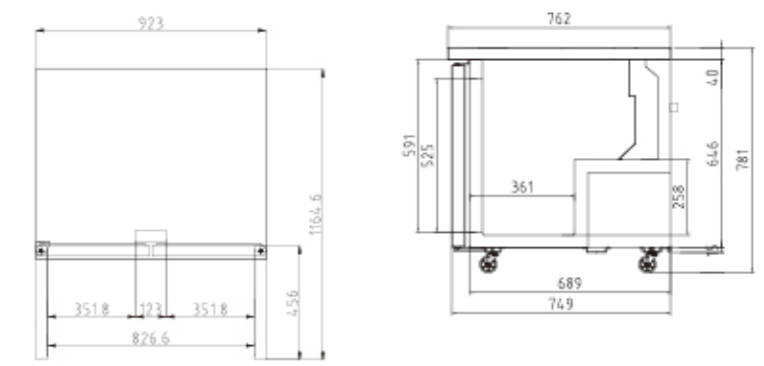

## SHALLOW DEPTH MODEL

## M3-Series

## SHALLOW DEPTH MODEL

R: 0~7°C FAN COOLING WxDxH (mm)



**CMUR-20S**

Ext. DIM:	508x570x777
Capacity(L):	65
Power(W):	317



**CMUR-24S**

Ext. DIM:	610x570x777
Capacity(L):	81
Power(W):	302



**CMUR-27S**

Ext. DIM:	686x570x777
Capacity(L):	93
Power(W):	302



**CMUR-34S**

Ext. DIM:	864x570x777
Capacity(L):	121
Power(W):	302



**CMWR-20S**

Ext. DIM:	508x570x868
Capacity(L):	65
Power(W):	317



**CMWR-24S**

Ext. DIM:	610x570x868
Capacity(L):	81
Power(W):	302



**CMWR-27S**

Ext. DIM:	864x570x868
Capacity(L):	121
Power(W):	302



**CMWR-34S**

Ext. DIM:	610x600x815
Capacity(L):	81
Power(W):	302



**CMST-24S**

Ext. DIM:	686x570x868
Capacity(L):	93
Power(W):	357



# Food Prep Tables

## SALAD PREP TABLES (BUFFET)

**K-Series**

R: 1°C~8°C FAN COOLING WxDxH (mm)




**KSR9-1**

Ext. DIM:	900x700x800
Capacity(L):	213
Power(W):	314




**KSR12-2**

Ext. DIM:	1200x700x800
Capacity(L):	309
Power(W):	314





**KSR15-2**

Ext. DIM:	1500x700x800
Capacity(L):	420
Power(W):	314




**KSR18-3**

Ext. DIM:	1800x700x800
Capacity(L):	516
Power(W):	366

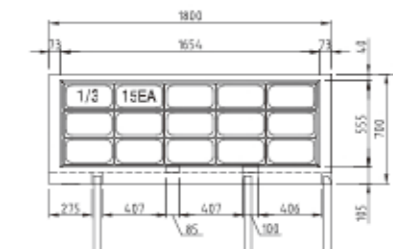

SIDE VIEW (Depth 700mm)



SIDE VIEW (Depth 750mm)

GN pans not included

# SALAD PREP TABLES (HOOD LID)

## K-Series



## PIZZA TABLES

R: 1°C~8°C FAN COOLING WxDxH (mm)



**KHR9-1**

Ext. DIM:	900×700×978
Capacity(L):	213
Power(W):	314

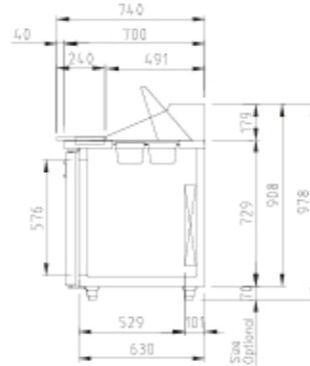


SIDE VIEW (Depth 700mm)





**KTR9-1**

Ext. DIM:	900×700×919
Capacity(L):	213
Power(W):	314



**KHR12-2**

Ext. DIM:	1200×700×978
Capacity(L):	309
Power(W):	314

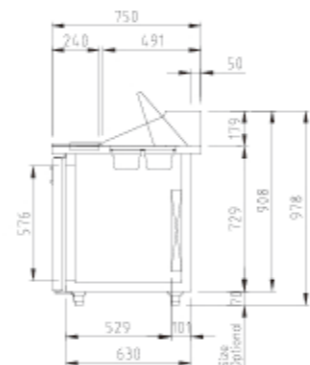


SIDE VIEW (Depth 700mm)





**KTR12-2**

Ext. DIM:	1200×700×919
Capacity(L):	309
Power(W):	314



**KHR15-2**

Ext. DIM:	1500×700×978
Capacity(L):	420
Power(W):	314

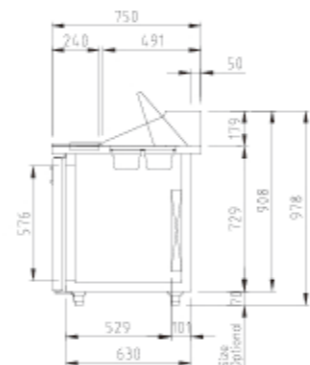



SIDE VIEW (Depth 750mm)




**KTR15-2**

Ext. DIM:	1500×700×919
Capacity(L):	420
Power(W):	314

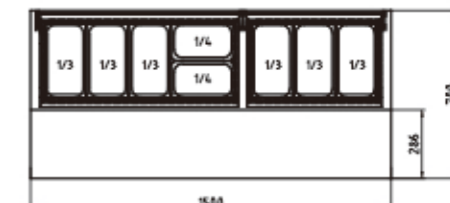

**KHR18-3**

Ext. DIM:	1800×700×978
Capacity(L):	516
Power(W):	366

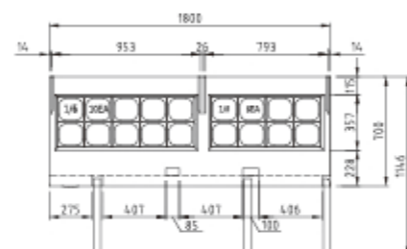



SIDE VIEW (Depth 750mm)

GN pans included



**KTR18-3**

Ext. DIM:	1800×700×919
Capacity(L):	516
Power(W):	366

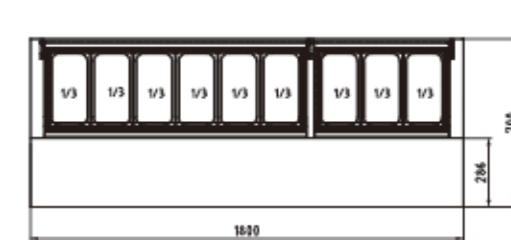

# SALAD PREP TABLES

## M3-Series



# MEGA TOP PREP TABLES

R: 1°C~8°C FAN COOLING WxDxH (mm)





**CMST-28**

Ext. DIM:	698x762x1082
Capacity(L):	184
Power(W):	264





**CMST-28-12**

Ext. DIM:	698x863x1133
Capacity(L):	224
Power(W):	314





**CMST-48**

Ext. DIM:	1225x762x1082
Capacity(L):	340
Power(W):	328





**CMST-48-18**

Ext. DIM:	1225x863x1133
Capacity(L):	416
Power(W):	366





**CMST-60**

Ext. DIM:	1530x762x1082
Capacity(L):	516
Power(W):	440





**CMST-60-24**

Ext. DIM:	1530x863x1133
Capacity(L):	526
Power(W):	366





**CMST-72**

Ext. DIM:	1846x762x1082
Capacity(L):	538
Power(W):	440



**CMST-72-30**

Ext. DIM:	1846x863x1133
Capacity(L):	640
Power(W):	440

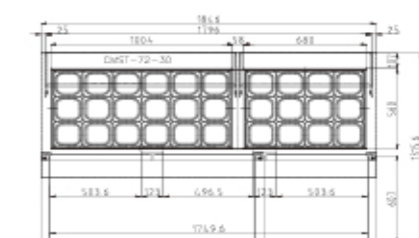

## PIZZA TABLES

R: 1°C~8°C FAN COOLING WxDxH (mm)





### CTPR-44SD

Ext. DIM: 1117×820×1069

Capacity(L): 396

Power(W): 366





### CTPR-67SD

Ext. DIM: 1702×820×1069

Capacity(L): 566

Power(W): 560


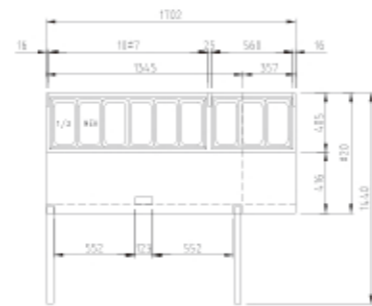


### CTPR-93SD

Ext. DIM: 2362×820×1069

Capacity(L): 878

Power(W): 660

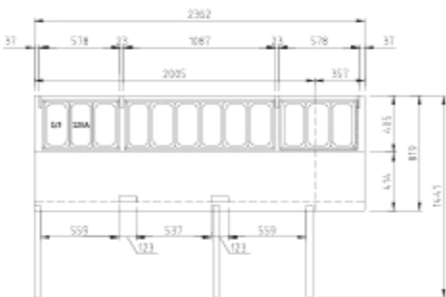

## CHEF BASE REFRIGERATORS

R: 1°C~8°C FAN COOLING WxDxH (mm)





### TCBE-52SDR

Ext. DIM: 1328×815×639.5

Capacity(L): 311

Power(W): 314





### TCBE-82SDR

Ext. DIM: 2123×815×639.5

Capacity(L): 538

Power(W): 366


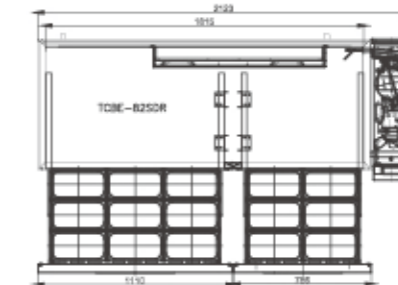


### TCBE-96SDR

Ext. DIM: 2447×815×639.5

Capacity(L): 651

Power(W): 366

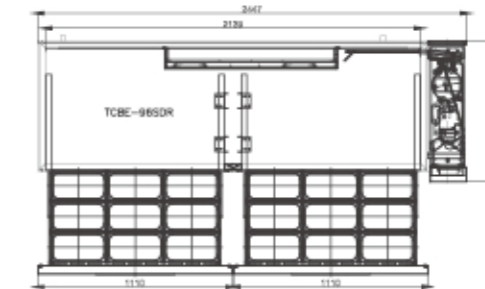



## CHEF BASE REFRIGERATORS/FREEZERS

R: 1°C~8°C F: -21°C~-12°C FAN COOLING WxDxH (mm)





PRCBE-36R-N  
PRCBE-36F-N

Ext. DIM:	914x852x677
Capacity(L):	130
Power(W):	210 394

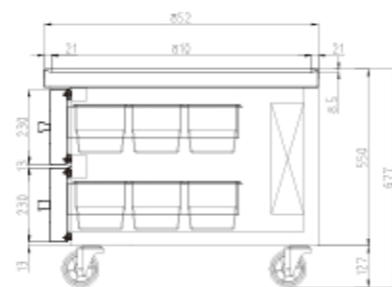



PRCBE-48R-N  
PRCBE-48F-N

Ext. DIM:	1219x852x677
Capacity(L):	193
Power(W):	210 394

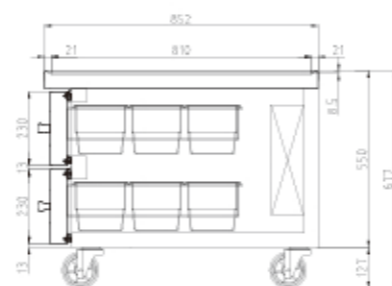

PRCBE-60R-N  
PRCBE-60F-N

Ext. DIM:	1525x852x677
Capacity(L):	276
Power(W):	210 394

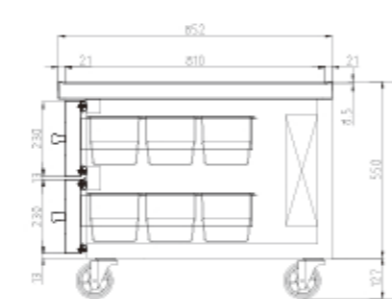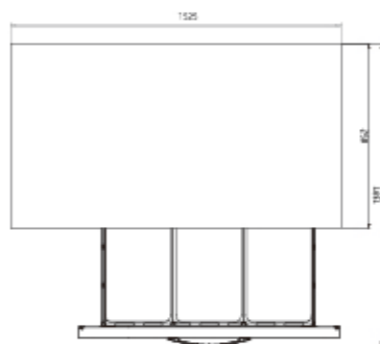


## CHEF BASE REFRIGERATORS/FREEZERS

R: 1°C~8°C F: -21°C~-12°C FAN COOLING WxDxH (mm)





PRCBE-72R-N  
PRCBE-72F-N

Ext. DIM:	1829x852x677
Capacity(L):	343
Power(W):	210 627

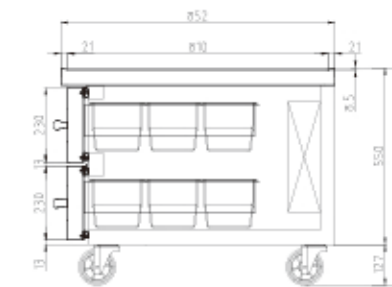



PRCBE-84R-N  
PRCBE-84F-N

Ext. DIM:	2134x852x677
Capacity(L):	417
Power(W):	290 627

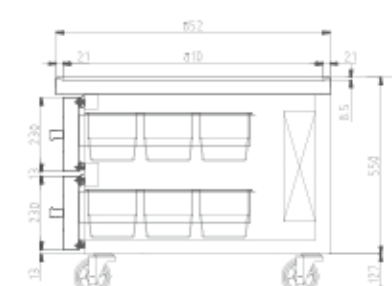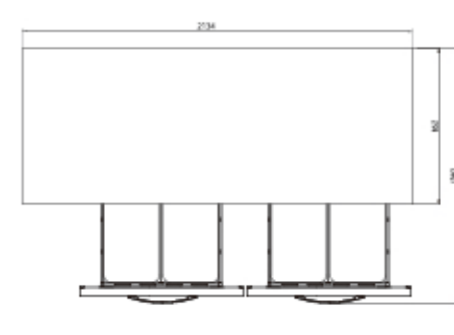

PRCBE-96R-N  
PRCBE-96F-N

Ext. DIM:	2438x852x677
Capacity(L):	495
Power(W):	290 627

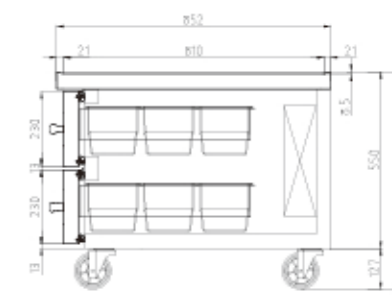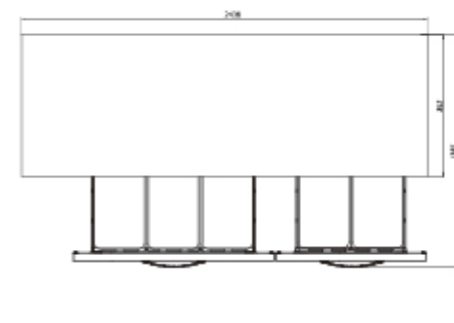


## CHEF BASE REFRIGERATORS

R: 1°C~8°C FAN COOLING WxDxH (mm)




**TCB12-2**

Ext. DIM: 1200x700x585  
Capacity(L): 190  
Power(W): 325

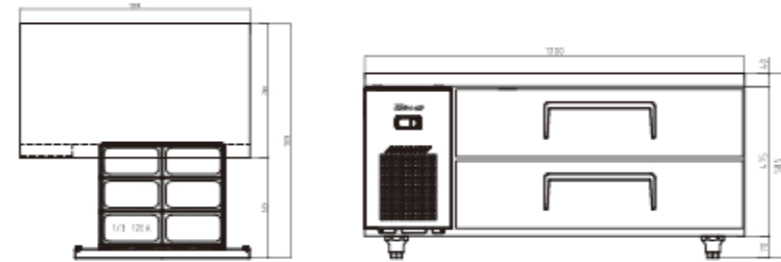


**TCB15-4**

Ext. DIM: 1500x700x585  
Capacity(L): 260  
Power(W): 325

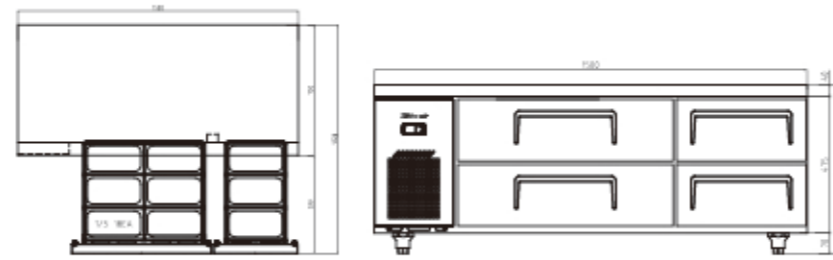


**TCB18-4**

Ext. DIM: 1800x700x585  
Capacity(L): 328  
Power(W): 325

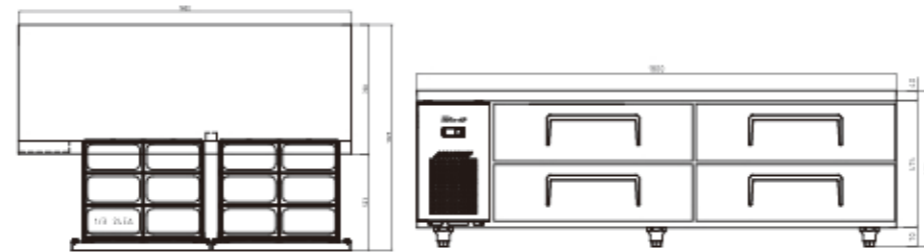

**TCB18-6**

Ext. DIM: 1800x700x585  
Capacity(L): 326  
Power(W): 325

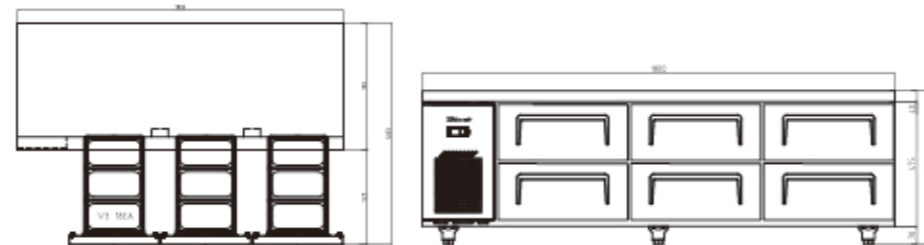



## SUSHI CASES

R: 1°C~8°C DIRECT COOLING WxDxH (mm)





**CTST-1200 CTST-1500 CTST-1800 CTST-1200-13 CTST-1500-13 CTST-1800-13**

Ext. DIM:	1200x335x225	1500x335x225	1800x335x225	1200x395x225	1200x395x225	1200x395x225
Capacity(L):	1/4 GN pans x5	1/4 GN pans x7	1/4 GN pans x9	1/3 GN pans x4	1/3 GN pans x6	1/3 GN pans x8
Power(W):	150	150	150	150	150	150

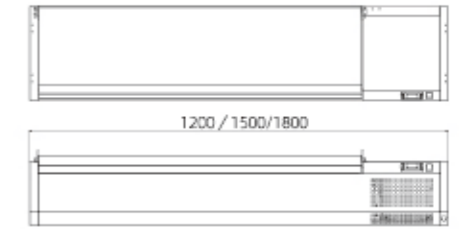

**CTST-1200G CTST-1500G CTST-1800G CTST-1200G-13 CTST-1500G-13 CTST-1800G-13**

Ext. DIM:	1200x335x425	1500x335x425	1800x335x425	1200x395x425	1500x395x425	1800x395x425
Capacity(L):	1/4 GN pans x5	1/4 GN pans x7	1/4 GN pans x9	1/3 GN pans x4	1/3 GN pans x6	1/3 GN pans x8
Power(W):	150	150	150	150	150	150

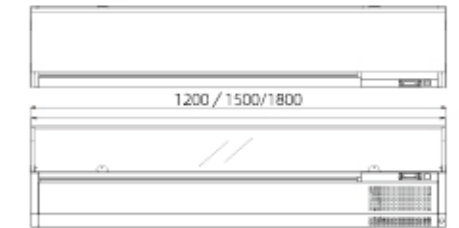


# BACK BAR


R: 1°C~8°C FAN COOLING WxDxH (mm)




	<b>TB6-8H-SWSS</b>	<b>TB6-8H-SWSBS</b>	<b>TB6-8H-SWBBB</b>
Ext. DIM:	600X586X802	600X586X802	600X586X802
Capacity(L):	117	117	117
Power(W):	270	270	270

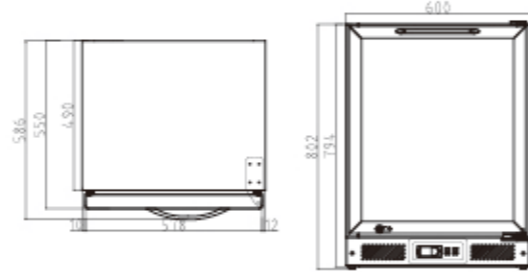

	<b>TB9-8H-SWSS</b>	<b>TB9-8H-SWSBS</b>	<b>TB9-8H-SWBBB</b>
Ext. DIM:	900X586X802	900X586X802	900X586X802
Capacity(L):	184	184	184
Power(W):	270	270	270

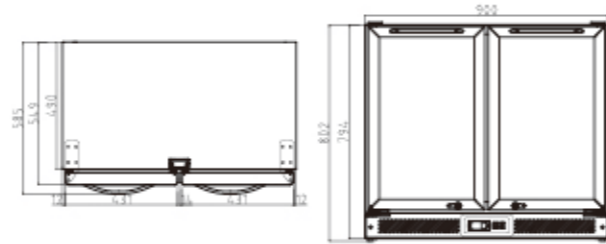

	<b>TB13-8H-SWSS</b>	<b>TB13-8H-SWSBS</b>	<b>TB13-8H-SWBBB</b>
Ext. DIM:	1350X586X802	1350X586X802	1350X586X802
Capacity(L):	286	286	286
Power(W):	290	290	290

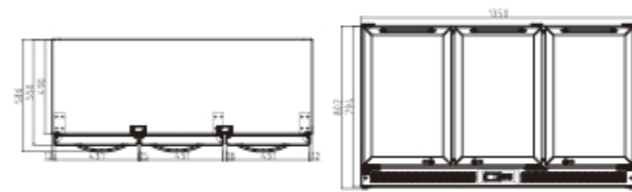


# BACK BAR


R: 1°C~8°C FAN COOLING WxDxH (mm)



	<b>TB9-8H-SLSBS</b>	<b>TB9-8H-SLBBB</b>	<b>TB9-9H-SLSBS</b>	<b>TB9-9H-SLBBB</b>
Ext. DIM:	900X490X802	900X490X802	900X490X892	900X490X892
Capacity(L):	159	159	184	184
Power(W):	270	270	270	270

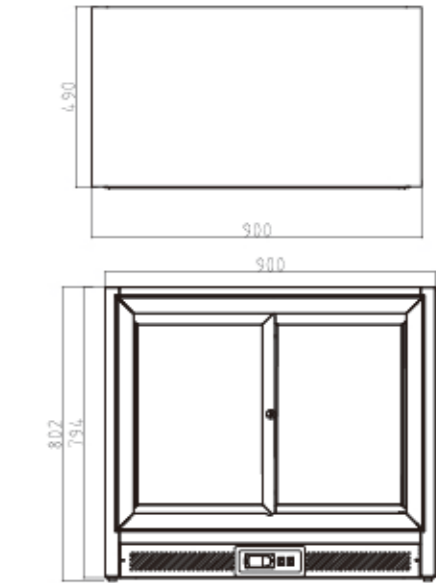

	<b>TB13-8H-SLSBS</b>	<b>TB13-8H-SLBBB</b>	<b>TB13-9H-SLSBS</b>	<b>TB13-9H-SLBBB</b>
Ext. DIM:	1350X490X802	1350X490X802	1350X490X892	1350X490X892
Capacity(L):	246	246	286	286
Power(W):	290	290	290	290

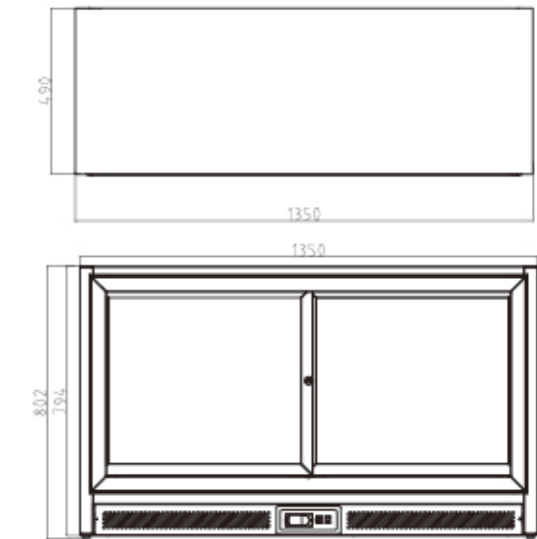


# Rectangle Bakery Cases



### Tempered Electrical-heating Glass

Electrically-heated Ultra Clear Glass is tempered for safety. High transparency maximizes display effect. Heating Glass prevents a condensation on glasses of the Display.

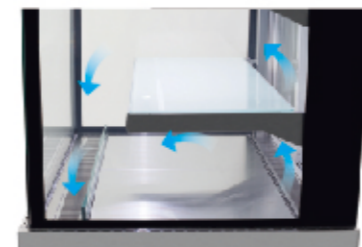

### Air Flow

Front air intake and rear exhaust, balanced air flow provides uniformly maintained temperature within the food zone.



### Drain Case With Warning System

The warning system alarms automatically when the drain case is full, preventing the overflow of the drain water.



### LED Lamp

The Eco Friendly LED Lamp with High brightness makes product presentation at its best and most beautiful.



### Digital Temperature Control

Using the Imported Display panel and PCB, the adjustment of temperature, power supply, and lamp is more precise and convenient.



### Air Heating System

Side fan motor provides proper warm air to prevent a condensation under unfavorable operating conditions.




### Temperature Display

Real-time temperature display in the cabinet. Adjustable temperature control.

## Customizable Options

### SUS & Colored Steel

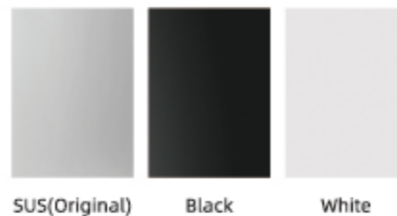

SUS(Original) Black White

### Marble



Brown-Stripes Yellow-Stripes Black-Stripes  
Bluish yellow-Stripes Black White-Stripes White-Stripes

### Door Type



Front sliding glass doors Back sliding glass doors

### Lighting System



Light colour Light guide plate LED lamp

## RECTANGLE BAKERY CASES

R: 3°C~8°C FAN COOLING WxDxH (mm)



The model shown in the picture is TBP1800-1

	TBP900-1	TBP1200-1	TBP1500-1	TBP1800-1	TBP2100-1	TBP2400-1
Ext. DIM:	900x700x1170	1200x700x1170	1500x700x1170	1800x700x1170	2100x700x1170	2400x700x1170
Capacity(L):	255	345	440	530	620	710
Power(W):	620	670	830	850	880	920

## RECTANGLE BAKERY CASES

R: 3°C~8°C FAN COOLING WxDxH (mm)




The model shown in the picture is TBP2100-2

	TBP900-2	TBP1200-2	TBP1500-2	TBP1800-2	TBP2100-2	TBP2400-2
Ext. DIM:	900x700x1370	1200x700x1370	1500x700x1370	1800x700x1370	2100x700x1370	2400x700x1370
Capacity(L):	355	485	615	740	870	1000
Power(W):	670	830	850	880	920	970

### Customizable Options


- SUS & Colored Steel
- Marble
- Door Type
- Light colour
- Light guide plate
- LED lamp

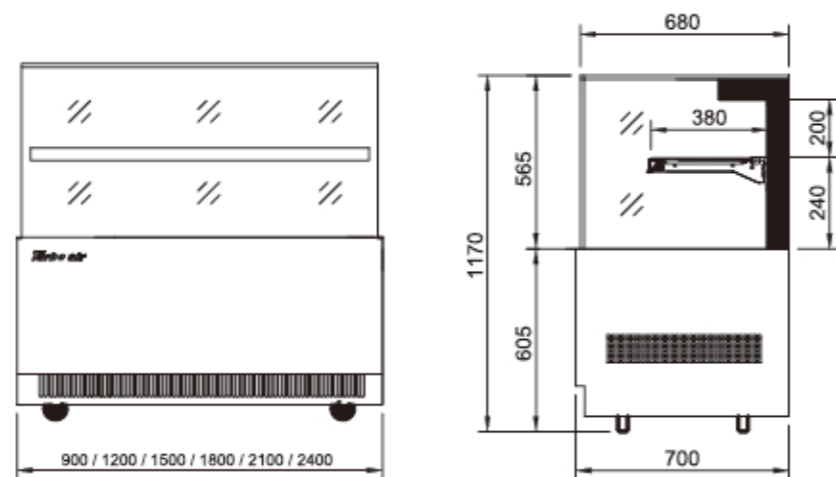

Note: The model with width of less than or equal to 1800mm has 2 doors in the back.  
The model with width of more than 1800mm has 4 doors in the back.

### Customizable Options

- SUS & Colored Steel
- Marble
- Door Type
- Light colour
- Light guide plate
- LED lamp

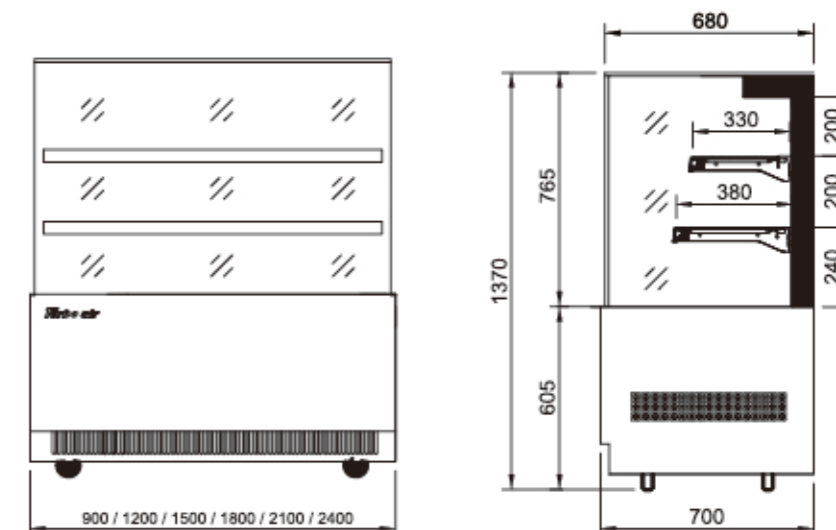

Note: The model with width of less than or equal to 1800mm has 2 doors in the back.  
The model with width of more than 1800mm has 4 doors in the back.

## RECTANGLE BAKERY CASES

R: 3°C~8°C FAN COOLING WxDxH (mm)



The model shown in the picture is TBP1500-3

	TBP900-3	TBP1200-3	TBP1500-3	TBP1800-3	TBP2100-3	TBP2400-3
Ext. DIM:	900x700x1570	1200x700x1570	1500x700x1570	1800x700x1570	2100x700x1570	2400x700x1570
Capacity(L):	455	620	785	950	1115	1280
Power(W):	830	860	880	920	970	1060

## RECTANGLE BAKERY CASES


R: 3°C~8°C FAN COOLING WxDxH (mm)



The model shown in the picture is TBP1500-1L


	TBP900-1L	TBP1200-1L	TBP1500-1L	TBP1800-1L	TBP2100-1L
Ext. DIM:	900x700x1186	1200x700x1186	1500x700x1186	1800x700x1186	2100x700x1186
Capacity(L):	255	345	440	530	620
Power(W):	620	670	830	850	880

### Customizable Options

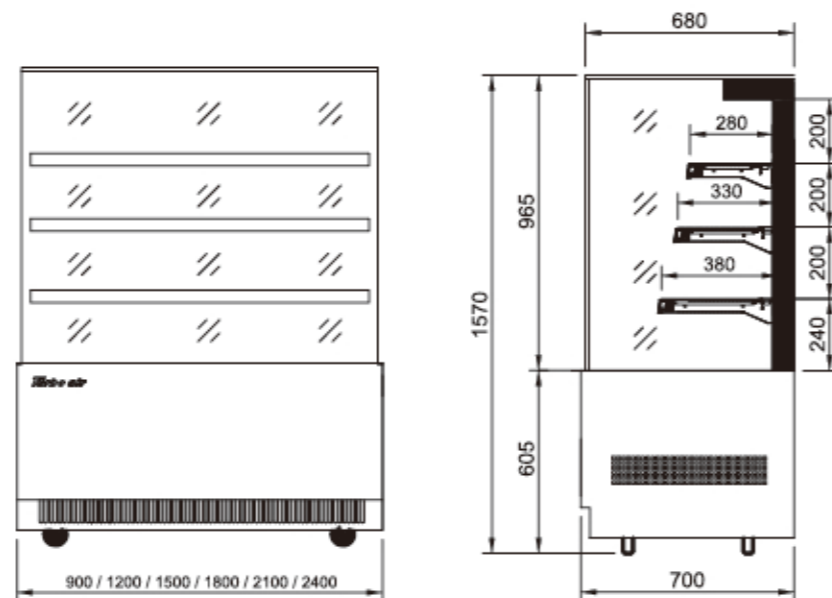

Note: The model with width of less than or equal to 1800mm has 2 doors in the back.  
The model with width of more than 1800mm has 4 doors in the back.

### Customizable Options

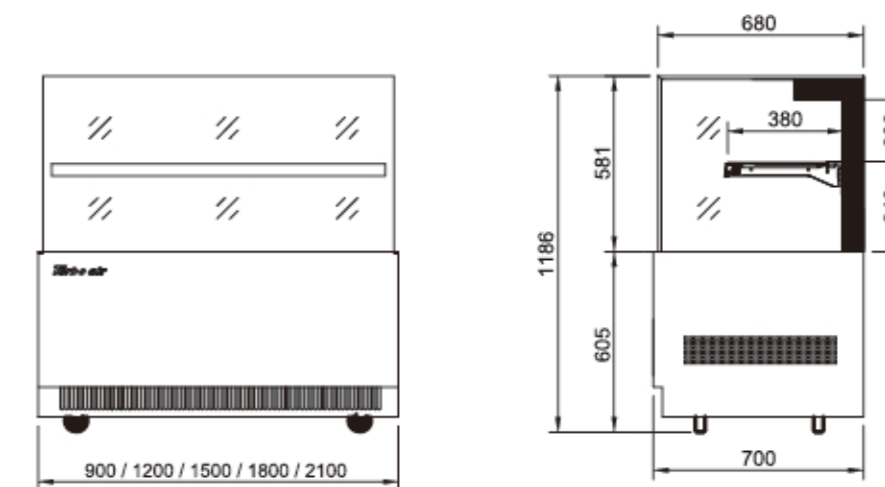

Note: The model with width of less than or equal to 1800mm has 2 doors in the back.  
The model with width of more than 1800mm has 4 doors in the back.

## RECTANGLE BAKERY CASES

R: 3°C~8°C FAN COOLING WxDxH (mm)



TBP900-2L TBP1200-2L TBP1500-2L TBP1800-2L TBP2100-2L

Ext. DIM:	900x700x1386	1200x700x1386	1500x700x1386	1800x700x1386	2100x700x1386
Capacity(L):	335	485	615	740	870
Power(W):	670	830	850	880	920

The model shown in the picture is TBP1800-2L

## RECTANGLE BAKERY CASES

R: 3°C~8°C FAN COOLING WxDxH (mm)



TBP-900L TBP-1200L TBP-1500L TBP-1800L TBP-2100L


Ext. DIM:	900x700x1105	1200x700x1105	1500x700x1105	1800x700x1105	2100x700x1105
Capacity(L):	105	145	182	220	260
Power(W):	650	680	830	850	880

The model shown in the picture is TBP-1200L

### Customizable Options

SUS & Colored Steel Marble

Light colour Light guide plate LED lamp plate

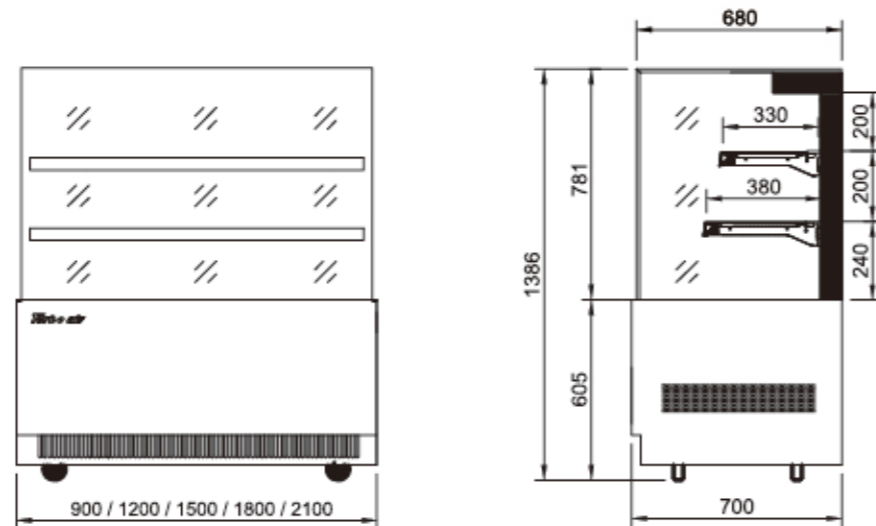


Note: The model with width of less than or equal to 1800mm has 2 doors in the back.  
The model with width of more than 1800mm has 4 doors in the back.

### Customizable Options

SUS & Colored Steel Marble

Light colour Light guide plate LED lamp plate

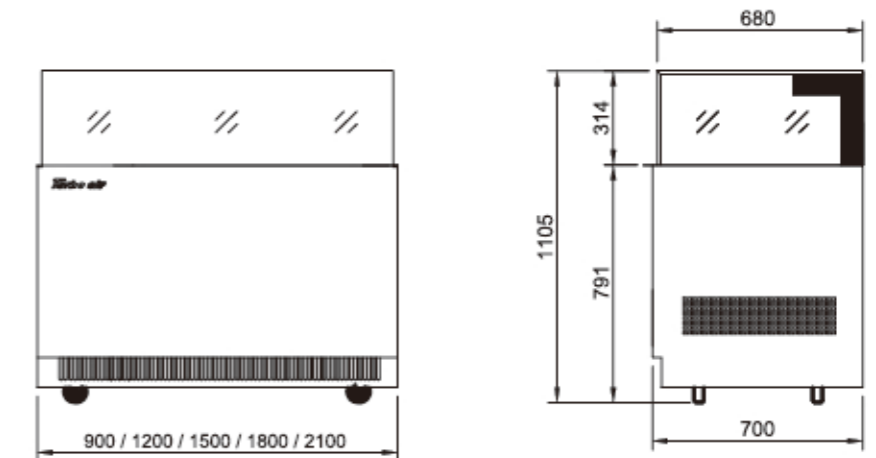

Note: The model with width of less than or equal to 1800mm has 2 doors in the back.  
The model with width of more than 1800mm has 4 doors in the back.

## RECTANGLE BAKERY CASES

R: 3°C~8°C FAN COOLING WxDxH (mm)



### TBP900-1F TBP1200-1F TBP1500-1F TBP1800-1F

Ext. DIM:	900x700x1170	1200x700x1170	1500x700x1170	1800x700x1170
Capacity(L):	255	345	440	530
Power(W):	620	670	830	850

### TBP900-2F TBP1200-2F TBP1500-2F TBP1800-2F

Ext. DIM:	900x700x1370	1200x700x1370	1500x700x1370	1800x700x1370
Capacity(L):	355	485	615	740
Power(W):	670	830	850	880

The model shown in the picture is TBP1200-2F

## ROUND BAKERY CASES

R: 3°C~8°C FAN COOLING WxDxH (mm)




### TBR900-2 TBR1200-2 TBR1500-2 TBR1800-2

Ext. DIM:	900x700x1370	1200x700x1370	1500x700x1370	1800x700x1370
Capacity(L):	335	485	615	740
Power(W):	670	830	850	880

The model shown in the picture is TBR1200-2


### Customizable Options

- SUS & Colored Steel
- Marble
- Door Type
- Light colour
- Light guide plate
- LED lamp

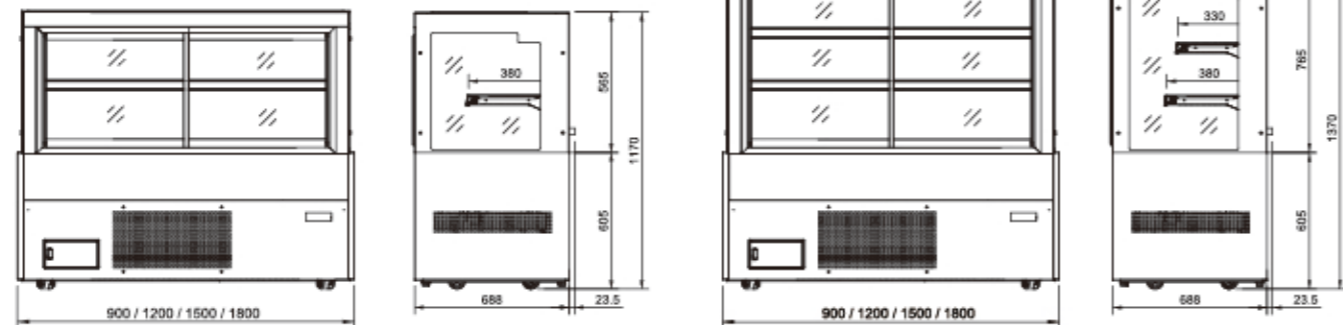

### Customizable Options

- SUS & Colored Steel
- Marble
- Light colour
- Light guide plate
- LED lamp

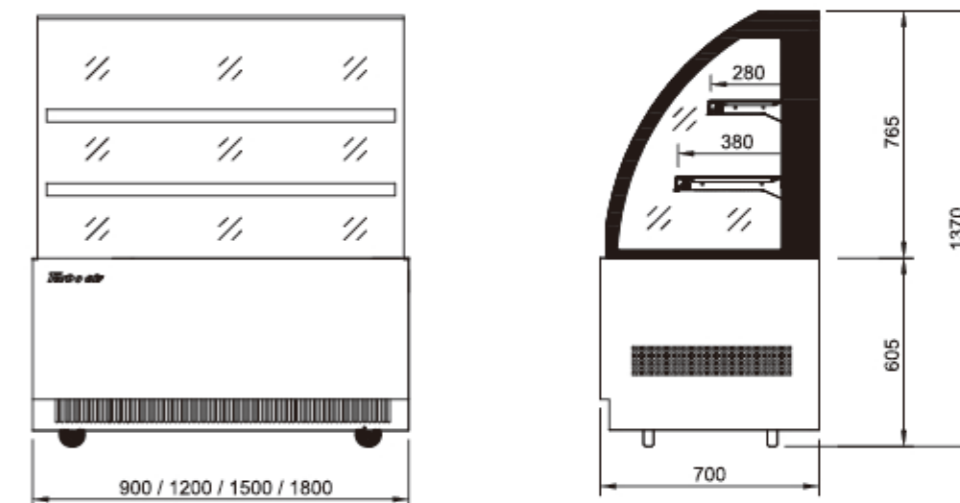

## BAKERY CASES HIGH

R: 3°C~8°C FAN COOLING WxDxH (mm)



The model shown in the picture is TBH-1200

	TBH-900	TBH-1200	TBH-1500	TBH-1800
Ext. DIM:	900x700x1910	1200x700x1910	1500x700x1910	1800x700x1910
Capacity(L):	340	470	600	725
Power(W):	800	880	950	1000

### Customizable Options



SUS & Colored Steel




Light colour



Light guide plate



LED lamp

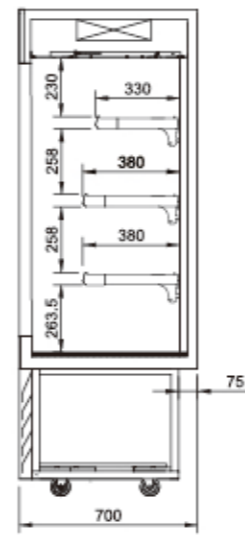


# Combi Show Cases






**Tempered Electrical-heating Glass**  
Electrically-heated Ultra Clear Glass is tempered for safety. High transparency maximizes display effect. Heating Glass prevents a condensation on glasses of the Display.

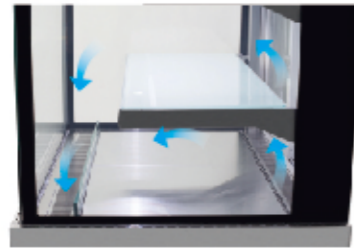

**Air Flow**  
Front air intake and rear exhaust, balanced air flow provides uniformly maintained temperature within the food zone.



**Drain Case With Warning System**  
The warning system alarms automatically when the drain case is full, preventing the overflow of the drain water.

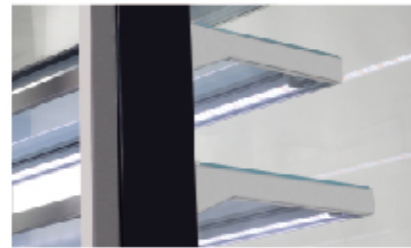

**LED Lamp**  
The Eco Friendly LED Lamp with High brightness makes product presentation at its best and most beautiful.



**Digital Temperature Control**  
Using the Imported Display panel and PCB, the adjustment of temperature, power supply, and lamp is more precise and convenient.



**High Efficient Radiating System**  
Powerful and Effective Radiating System ensures that equipment operates properly.



**Temperature Display**  
Real-time temperature display in the cabinet. Adjustable temperature control.


## COMBI SHOW CASES

BAKERY: 3°C~8°C OPEN: 5°C~10°C FAN COOLING WxDxH (mm)



### TCB-1500

Ext. DIM:	1500x900x1515
Capacity(L):	Bakery: 117 Open: 256
Power(W):	1250

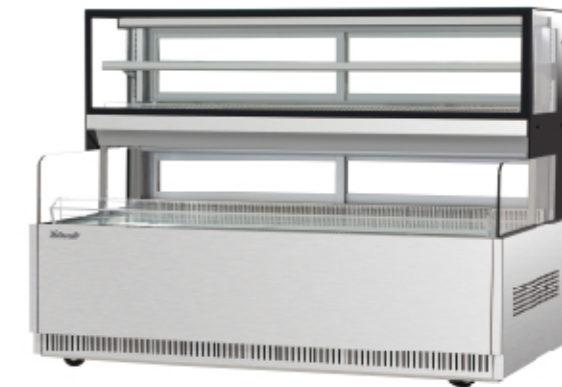

### TCB-1800

Ext. DIM:	1800x900x1515
Capacity(L):	Bakery: 142 Open: 311
Power(W):	1500

## Customizable Options

### SUS & Colored Steel



SUS(Original) Black White



### Door Type






Front sliding glass doors Back sliding glass doors



### Lighting System



Light colour Light guide plate LED lamp

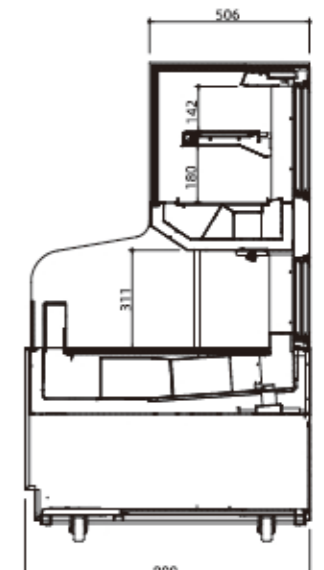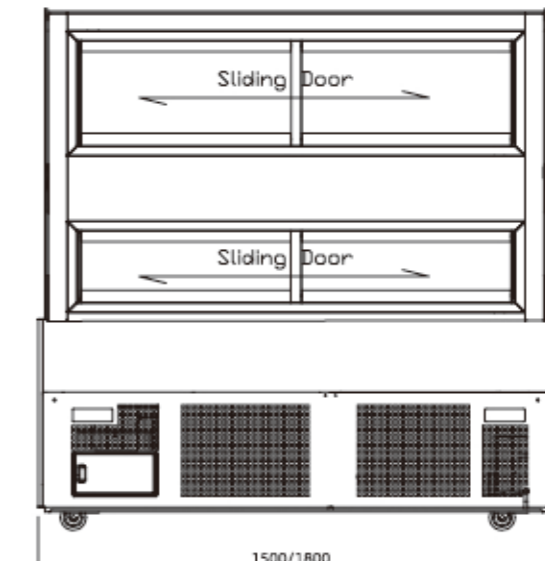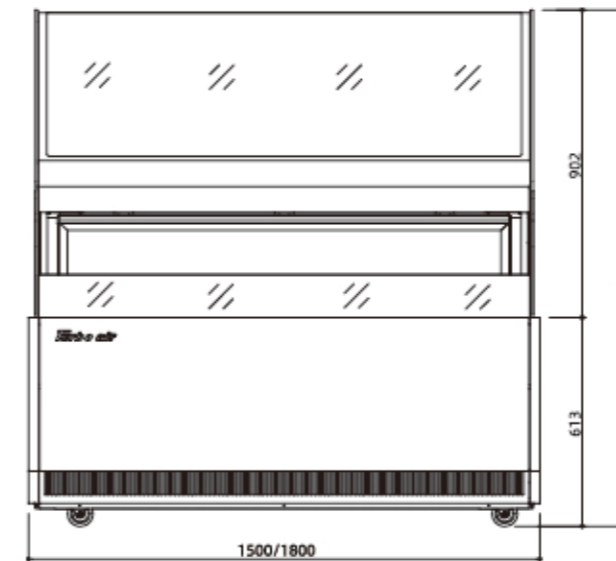



# Sandwich Cases




**High-quality Tempered Glass**  
Electrically-heated Ultra Clear Glass is tempered for safety. High transparency maximizes display effect. Heating Glass prevents a condensation on glasses of the Display.



**Drain Case With Warning System**  
The warning system alarms automatically when the drain case is full, preventing the overflow of the drain water.



**Quiet-Design**  
Quiet-design provides you a better experience.

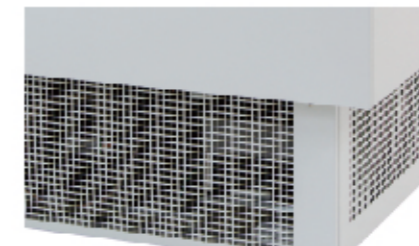

**High Efficient Radiating System**  
Powerful and Effective Radiating System ensures that equipment operates properly.



**Customized Dimension**  
The equipment's width can be customized within 700mm~1200mm.



**Various Types of Exterior Design**  
We can provide a variety of design types to meet our customer's various needs.

## Customizable Options



SUS & Colored Steel



SUS(Original)



Black



White



Marble



Brown-Stripes



Yellow-Stripes



Black-Stripes



Bluish yellow-Stripes





Black White-Stripes



White-Stripes

## SANDWICH CASES

R: 5°C~10°C FAN COOLING WxDxH (mm)

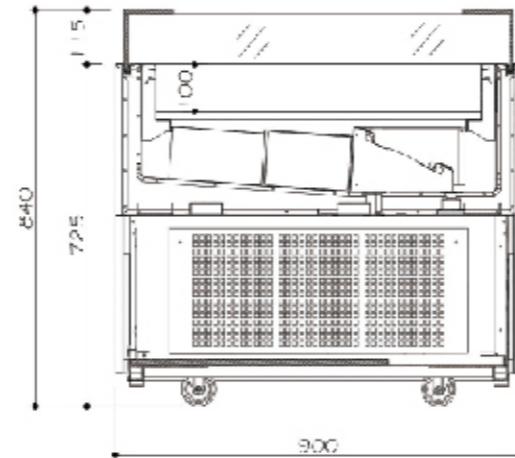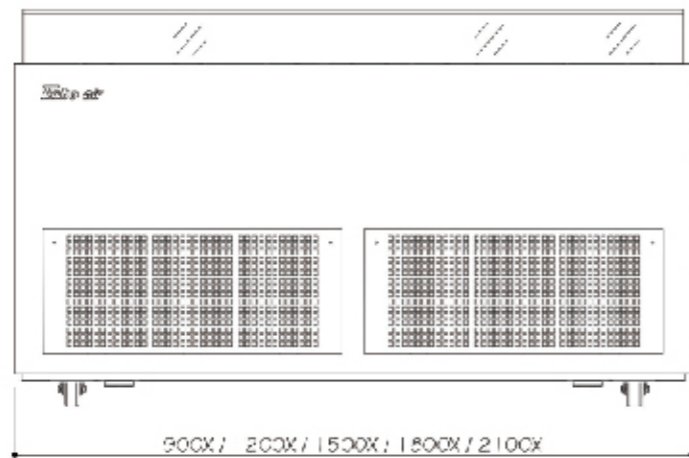

## SANDWICH CASES

R: 5°C~10°C FAN COOLING WxDxH (mm)



**TOS-900X**    **TOS-1200X**    **TOS-1500X**    **TOS-1800X**    **TOS-2100X**

Ext. DIM:	900*900*840	1200*900*840	1500*900*840	1800*900*840	2100*900*840
Capacity(L):	115	159	203	247	291
Power(W):	410	600	600	794	1145

Refrigerant	R-404A				
Compressor(HP)	3/4	3/4	3/4	1	11/4
Cooling Type	Fan cooling type				
Weight(kg)	140	170	200	230	255
Amps(A)	1.9	2.7	2.7	3.6	5.2

# SANDWICH CASES

R: 5°C~10°C FAN COOLING WxDxH (mm)



The model shown in the picture is TOS-1500

	TOS-900	TOS-1200	TOS-1500
Ext. DIM:	900×900×840/920	1200×900×840/920	1500×900×840/920
Capacity(L):	100/145	135/200	170/255
Power(W):	400	500	600

	TOS-1800	TOS-2100	TOS-2400
Ext. DIM:	1800×900×840/920	2100×900×840/920	2400×900×840/920
Capacity(L):	205/310	240/365	275/420
Power(W):	705	820	910

### Customizable Options

- SUS & Colored Steel
- Marble



# SANDWICH CASES

R: 5°C~10°C FAN COOLING WxDxH (mm)



The model shown in the picture is TOS-1500A

	TOS-900A	TOS-1200A	TOS-1500A	TOS-1800A
Ext. DIM:	900×900×920	1200×900×920	1500×900×920	1800×900×920
Capacity(L):	123	168	212	257
Power(W):	400	500	600	705


### Product features:



sliding glass door:  
Prevent the loss of cold air effectively  
Enhance energy saving effect.

Customizable Options

- SUS & Colored Steel
- Marble

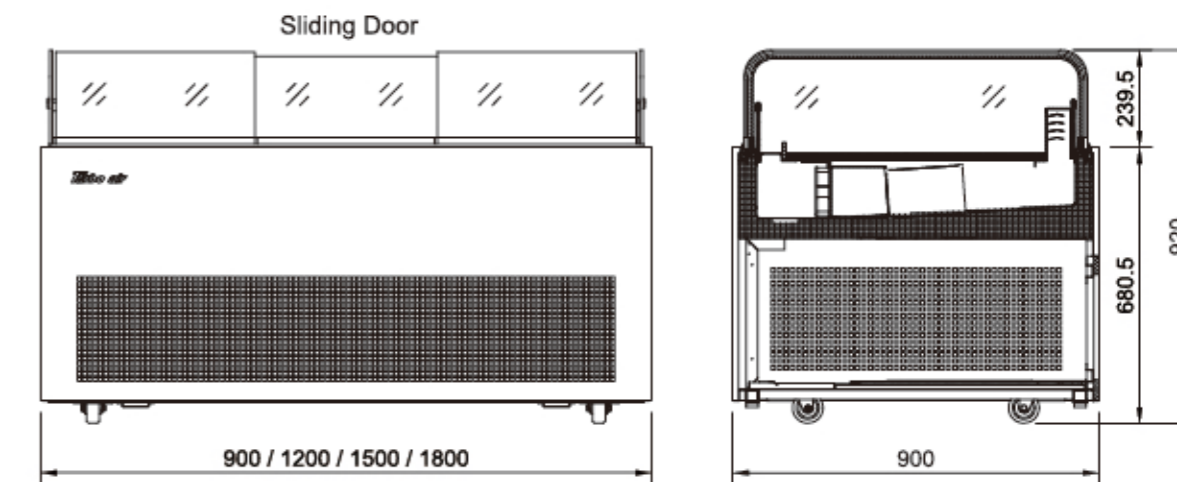

## SANDWICH CASES

R: 5°C~10°C FAN COOLING WxDxH (mm)



The model shown in the picture is TOS-1200P

TOS-900P TOS-1200P TOS-1500P TOS-1800P TOS-2100P

Ext. DIM:	900×900×920	1200×900×920	1500×900×920	1800×900×920	2100×900×920
Capacity(L):	164	226	289	352	415
Power(W):	400	500	600	705	820

### Product features:



Deeper depth: more foods on display.  
Vertical air outlet: better cooling effect.



Design of lower indent makes better radiating effect.  
Ensure the normal operation of equipment, prolong the service life.

## SANDWICH CASES







R: 5°C~10°C FAN COOLING WxDxH (mm)



The model shown in the picture is TOS-1800C

TOS-900C TOS-1200C TOS-1500C TOS-1800C

Ext. DIM:	900×900×1055	1200×900×1055	1500×900×1055	1800×900×1055
Capacity(L):	110	150	180	200
Power(W):	400	500	600	705

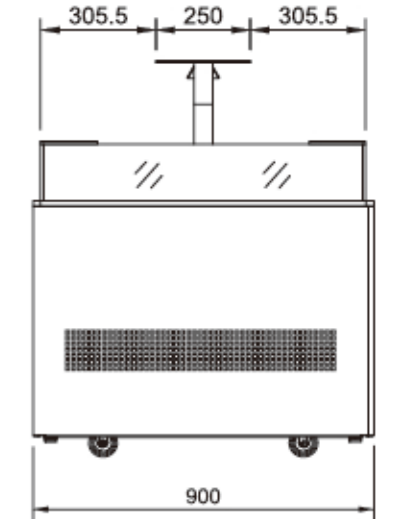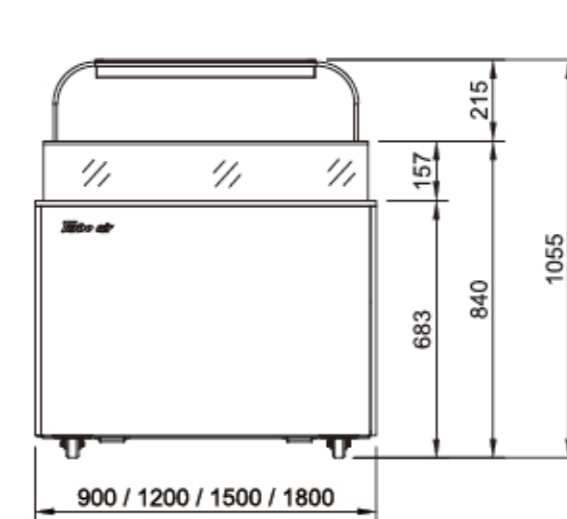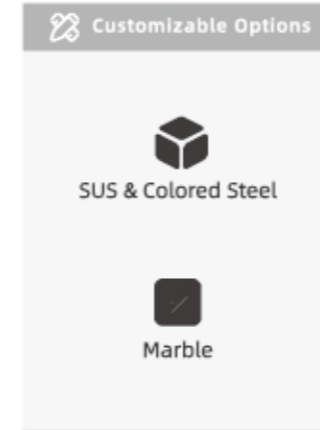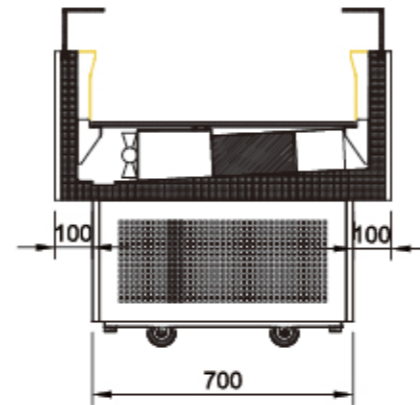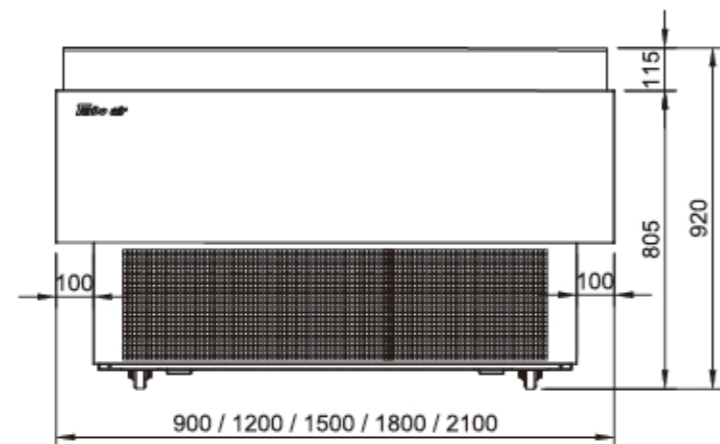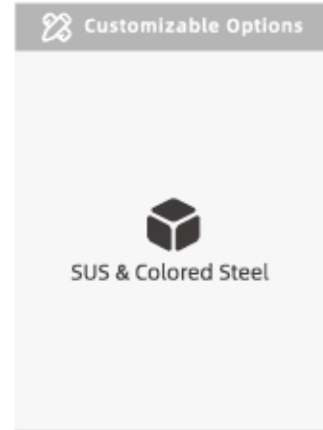

# SANDWICH CASES

R: 5°C~10°C FAN COOLING WxDxH (mm)



The model shown in the picture is TOS-1500R

TOS-900R TOS-1200R TOS-1500R TOS-1800R

Ext. DIM:	900×900×920	1200×900×920	1500×900×920	1800×900×920
Capacity(L):	123	168	212	257
Power(W):	400	500	600	705

Product features:



Curved glass design, More varieties are available.

# SANDWICH CASES

R: 5°C~10°C FAN COOLING WxDxH (mm)



The model shown in the picture is TBS-1800F

TBS-900F TBS-1200F TBS-1500F TBS-1800F

Ext. DIM:	900×900×1158	1200×900×1158	1500×900×1158	1800×900×1158
Capacity(L):	230	315	395	480
Power(W):	400	500	600	705



Product features:



Prevent the loss of cold air effectively, Enhance energy saving effect. Tempered Ultra Clear Glass, High transparency is up to more than 92%.



Customizable Options

- SUS & Colored Steel
- Marble

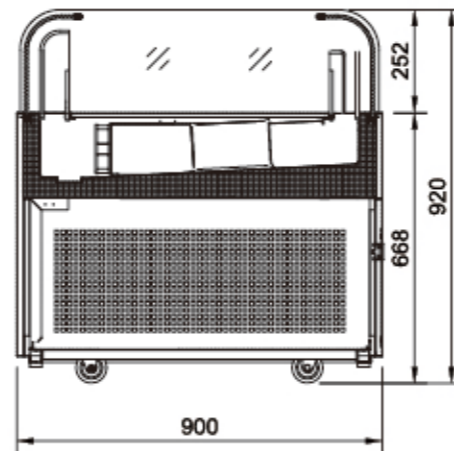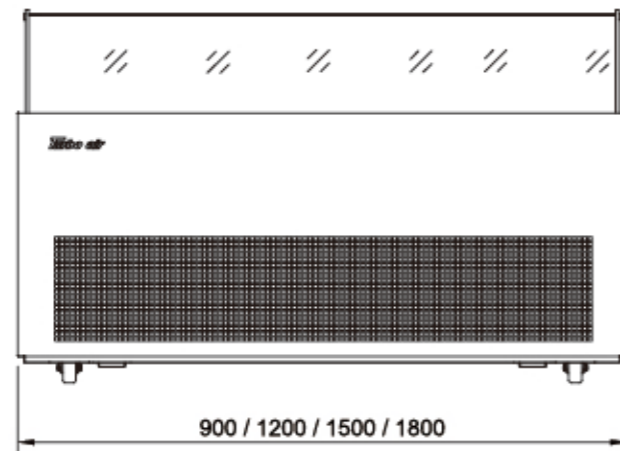

Customizable Options

- SUS & Colored Steel
- Marble

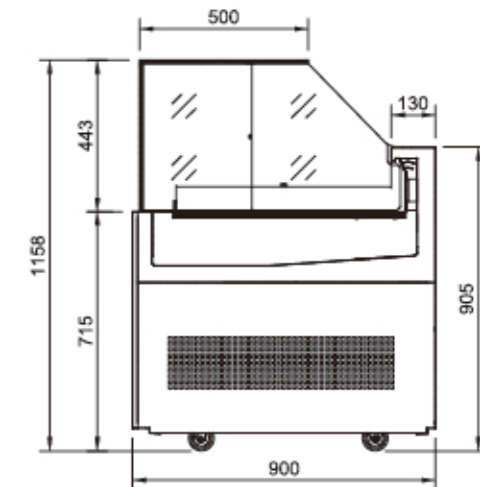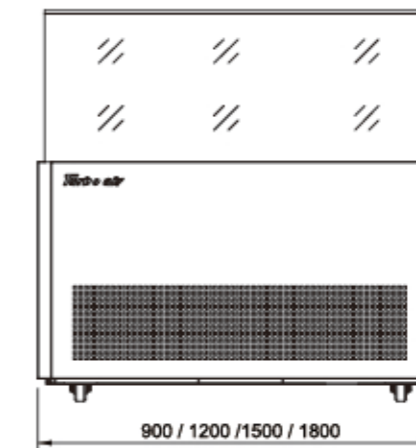



# Chocolate Cases



**Tempered Electrical-heating Glass**  
Electrically-heated Ultra Clear Glass is tempered for safety. High transparency maximizes display effect. Heating Glass prevents a condensation on glasses of the Display.



**Mini-LED Lamp**  
Mini-LED Lamp makes display more clear and gorgeous.



**LED Base Plate Lamp**  
Enhance the brightness in the cabinet to optimize display effects.



**Drain Case With Warning System**  
The warning system alarms automatically when the drain case is full, preventing the overflow of the drain water.



**Digital Temperature Control**  
Using the Imported Display panel and PCB, the adjustment of temperature, power supply, and lamp is more precise and convenient.



**Rail-mounted Drawers**  
Open and close smoothly. Convenient access with fast service.



**Back Refrigeration Storage Space**  
Other storage room on the back side, it provides much more space for cold storage.

## Customizable Options

<p><b>SUS &amp; Colored Steel</b></p> <p>SUS(Original)   Black   White</p>	<p><b>Marble</b></p> <p>Brown-Stripes   Yellow-Stripes   Black-Stripes Bluish yellow-Stripes   Black White-Stripes   White-Stripes</p>	<p><b>Lighting System</b></p> <p>Light colour   Light guide plate   LED lamp</p>
--	--	--

# CHOCOLATE CASES

SHOW: 5°C~10°C STORE: 10°C~14°C FAN COOLING WxDxH (mm)




The model shown in the picture is TCD-1500

	TCD-900	TCD-1200	TCD-1500	TCD-1800	TCD-2100
Ext. DIM:	900×800×1083	1200×800×1083	1500×800×1083	1800×800×1083	2100×800×1083
Capacity(L):	211	288	345	410	475
Ext. DIM:	800	900	970	1080	1150

**Customizable Options**


- SUS & Colored Steel
- Marble
- Light colour
- Light guide plate
- LED lamp

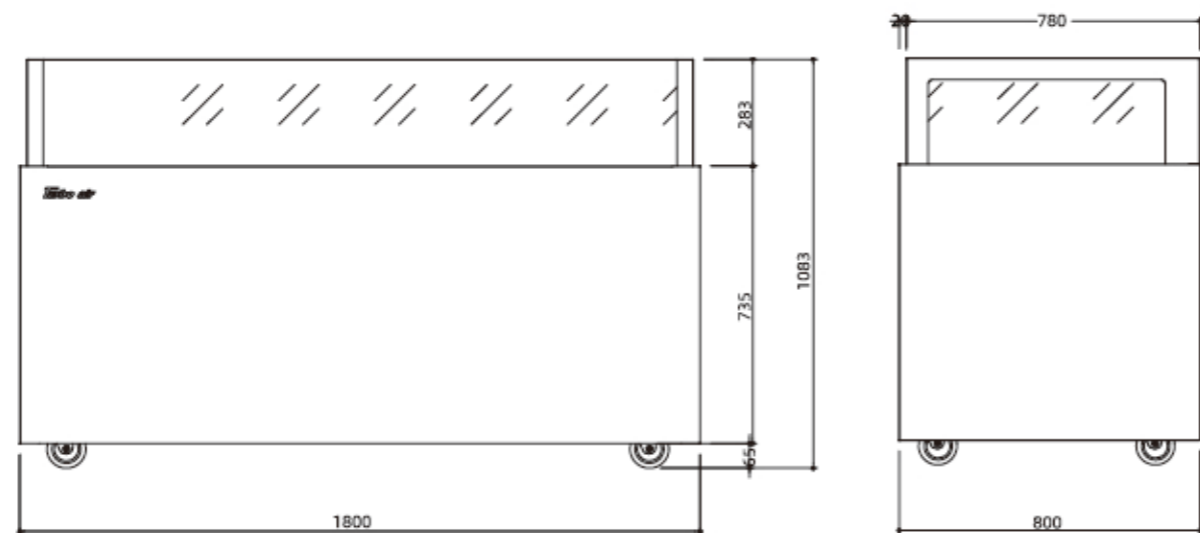



#### High-quality Tempered Glass

All glass is tempered for safety. The high transparency maximizes display effects.

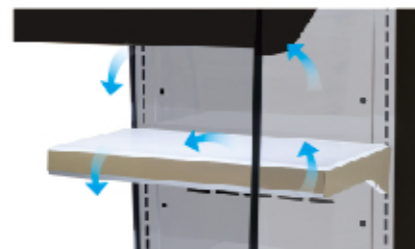

#### Air Flow

Front air intake and rear exhale, balanced air flow provides uniformly maintained temperature within the food zone.



#### Air Curtain

Prevent the loss of cooling air, Optimize a storage environment.



#### LED Lamp

The Eco Friendly LED Lamp with High brightness makes the display more clear and gorgeous.



#### Digital Temperature Control

Using the Imported Display panel and PCB, the adjustment of temperature, power supply, and lamp is more precise and convenient.



#### Honeycomb Patterned Guide Panel

Ensure even distribution of cold air in the cabinet, so as to keep the temperature consistent.

## OPEN CASES SLIM

R: 5°C~10°C FAN COOLING WxDxH (mm)

### Customizable Options



SUS & Colored Steel



Light colour



Light guide plate




LED lamp

### TOM500-4

Ext. DIM: 500x650x1910

Capacity(L): 140

Power(W): 650

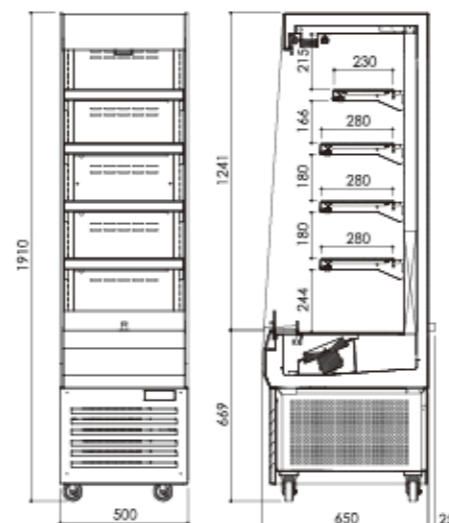


### TOM500-2

Ext. DIM: 500x650x1510

Capacity(L): 100

Power(W): 600

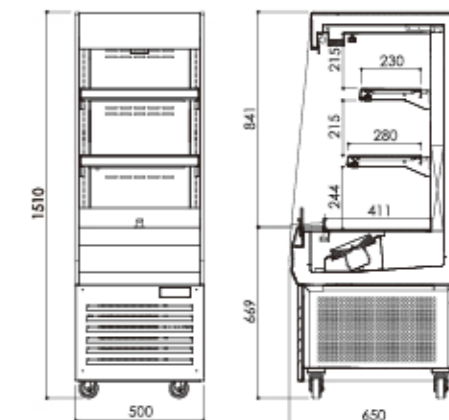

### Customizable Options

#### SUS & Colored Steel



SUS(Original)

Black

White



#### Lamp System



Light colour



Light guide plate



LED lamp


## OPEN CASES HIGH

R: 5°C~10°C FAN COOLING WxDxH (mm)



The model shown in the picture is TOH-1200

	TOH-900	TOH-1200
Ext. DIM:	900x700x1910	1200x700x1910
Capacity(L):	340	470
Power(W):	800	880
	TOH-1500	TOH-1800
Ext. DIM:	1500x700x1910	1800x700x1910
Capacity(L):	600	730
Power(W):	950	1100

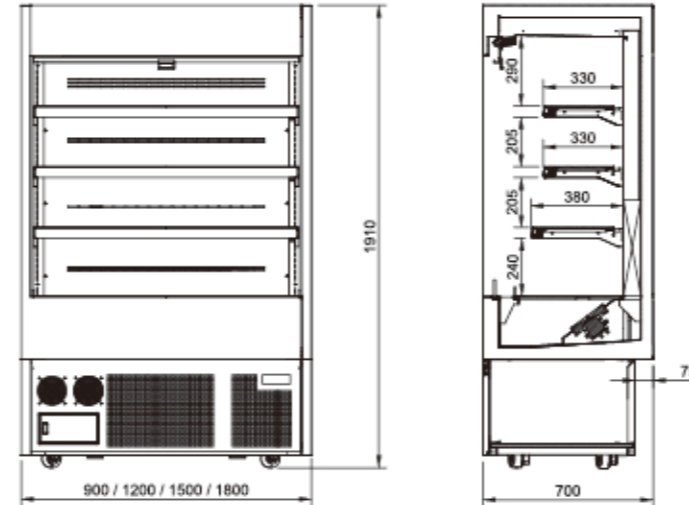

## OPEN ROUND CASES

R: 5°C~10°C FAN COOLING WxDxH (mm)




The model shown in the picture is TBA-900

	TBA-900	TBA-1200
Ext. DIM:	940x710x1290	1240x710x1290
Capacity(L):	150	205
Power(W):	670	830




The model shown in the picture is TOH-700-N

	TOH-700-N
Ext. DIM:	700x700x1911
Capacity(L):	247.5
Frigerant:	R-290
# Of shelves:	4 Glass shelves

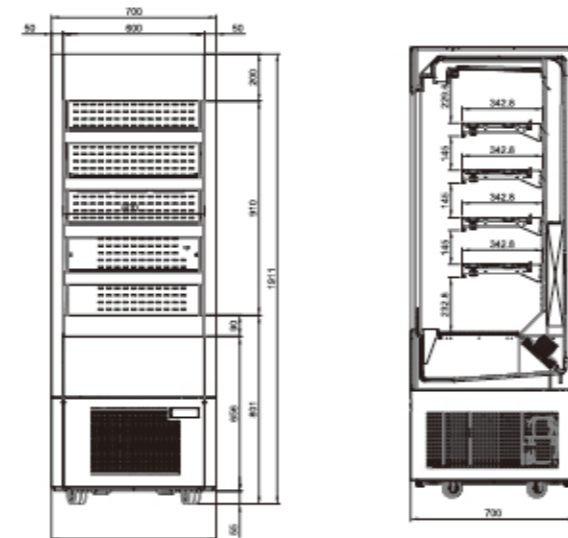

Customizable Options

- SUS & Colored Steel
- Light colour
- Light guide plate
- LED lamp

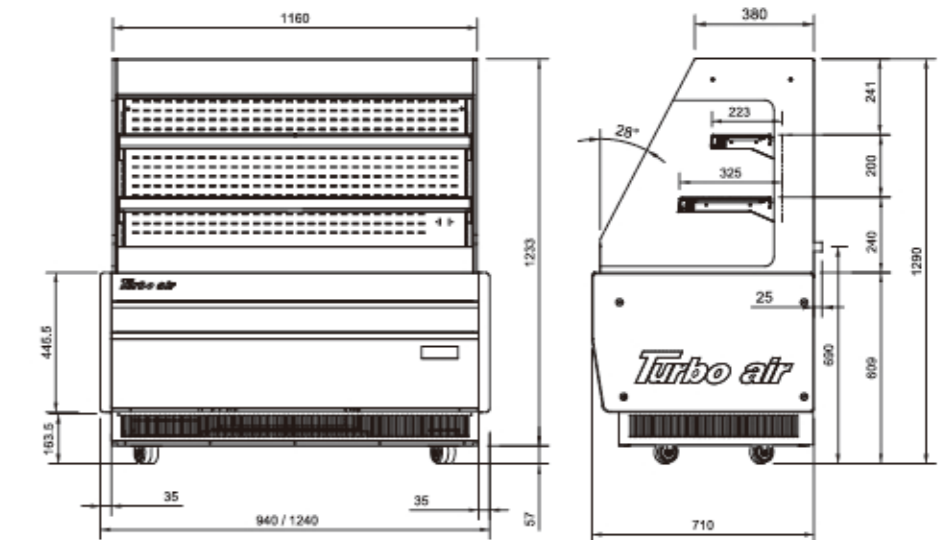

# Baking-Related Products

## DOUGH FREEZER

- ✔ Designed with dual system.(two compressors, condensers, and evaporators respectively)
- ✔ High Cooling Speed, The temperature can reach as low as -30°C.
- ✔ Self-closing doors with stay open feature; LED interior lighting.
- ✔ Left hinged models available.
- ✔ Radiused corners inside the cabinet are designed for easy-to-clean.

## DOUGH CONDITIONER

- ✔ Stylish LCD touch screen.  
The interface is easy to understand and convenient to operate.
- ✔ Smart Quick Menu Setting: Menu-presetting function. Pattern memory function.
- ✔ Automatic Humidity Control System (Patented): This function provides the best dough condition, and solve the problem that the humidity can not be adjusted when it's too high.
- ✔ Automatic Drying System.
- ✔ Radiused corners inside the cabinet are designed for easy-to-clean.
- ✔ Self-closing doors with stay open feature; LED interior lighting.

## DOUGH FREEZER/DOUGH CONDITIONER

FAN COOLING WxDxH (mm)  
 \* FREEZERS: -18°C-- -30°C    CONDITIONERS: -10°C--45°C



**Dough Freezers**  
 \* TBF-36-2R

Ext. DIM:	800x1230x1970
Capacity(L):	400x2
Power(W):	1000
# of pans:	36 pans




**Dough Conditioners**  
 \* TDC-18-1R

Ext. DIM:	640x850x1970
Capacity(L):	500
Power(W):	Refrigeration:540 Dough recovery: 420
# of pans:	18 pans



**Dough Conditioners**  
 \* TDC-36-2R

Ext. DIM:	800x1230x1970
Capacity(L):	400x2
Power(W):	Refrigeration:540x2 Dough recovery: 420x2
# of pans:	36 pans

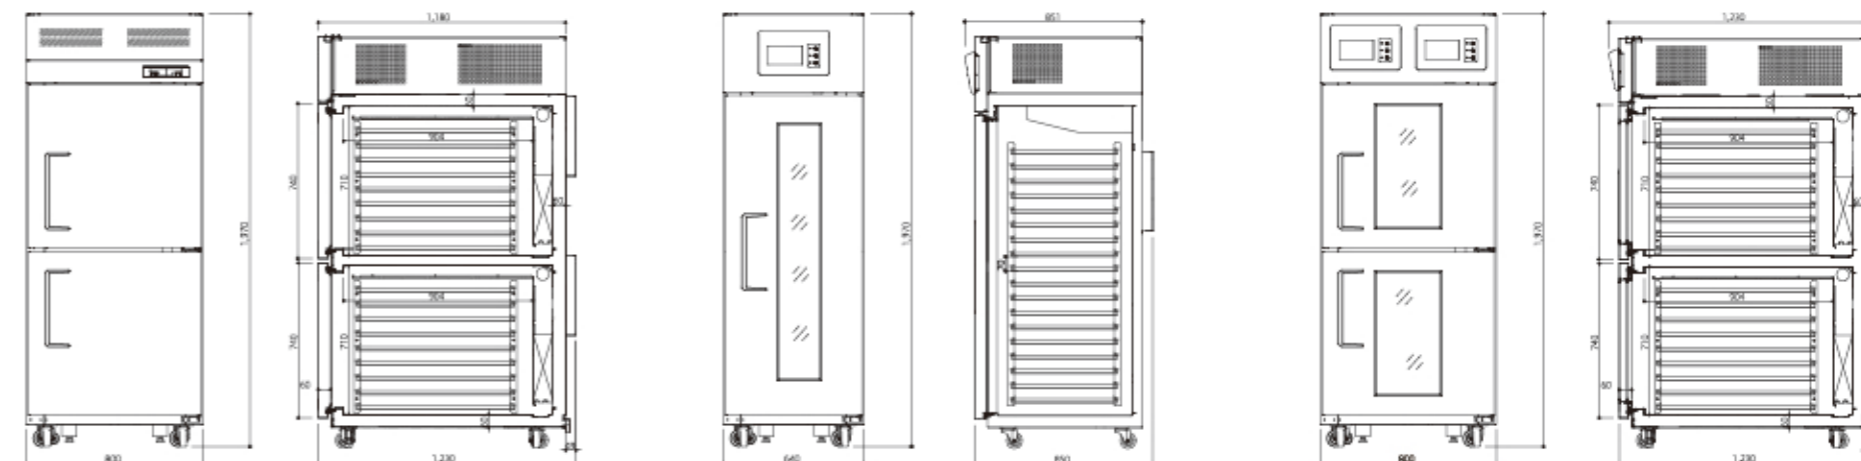

# Baking-Related Products

## DOUGH FREEZER/DOUGH CONDITIONER

FAN COOLING WxDxH (mm)

\* FREEZERS: -18°C~-30°C CONDITIONERS: -10°C~+45°C






**Dough Conditioners**  
\* TDC-36-1R

Ext. DIM:	800x1230x1970
Capacity(L):	800
Power(W):	Refrigeration:598 Dough recovery:1512
# of pans:	36pans



**Dough Conditioners**  
\* TDC-36-1R1F

Ext. DIM:	800x1230x1970
Capacity(L):	400x2
Power(W):	Refrigeration :540 Dough recovery :420 Dough refrigeration:612
# of pans:	36pans

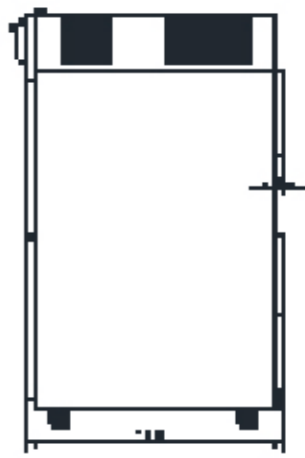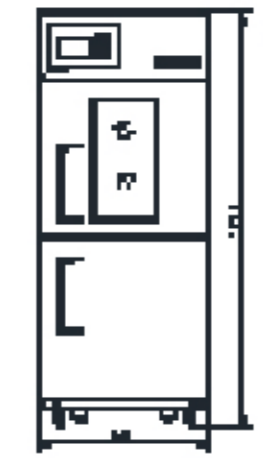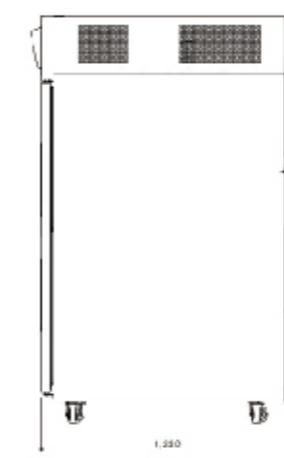



## BLAST CHILLER

FAN COOLING WxDxH (mm)



### BLAST CHILLER \* TBC-15



Ext. DIM:	800X870x1935
Capacity(L):	310
Power(W):	3800
# of pans:	15pans

### BLAST CHILLER \* TBC-10

Ext. DIM:	800X870x1595
Capacity(L):	216
Power(W):	2200
# of pans:	10pans

### BLAST CHILLER \* TBC-5

Ext. DIM:	800X870x1045
Capacity(L):	120
Power(W):	1500
# of pans:	5pans

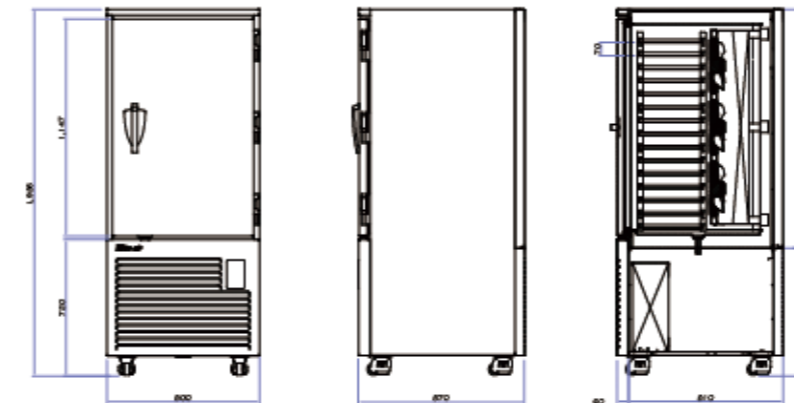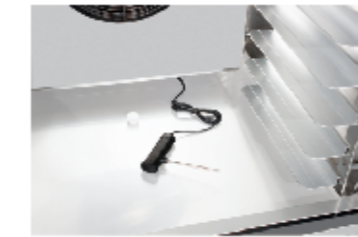

- Soft rapid cooling: 90°C to 3°C/ within 90 minutes
- Hard and rapid cooling: after 90°C to -20°C, maintain 3°C/90 minutes or less
- Rapid freezing: 90°C to -18°C/240 minutes
- Touch screen control
- Monolithic high-density foamed cyclopentane + free of CFCS

# Gelato Show Cases

## GELATO SHOW CASES

F: -16°C~-18°C FAN COOLING WxDxH (mm)



TGL-10

TGL-12



Ext. DIM:	1030×900×1350	1230×900×1350
Capacity(L):	268	368
Power(W):	950	1050



TIDC-06

TIDC-08

Ext. DIM:	1080×838×1270	1350×838×1270
Capacity(L):	325	415
Power(W):	660	760

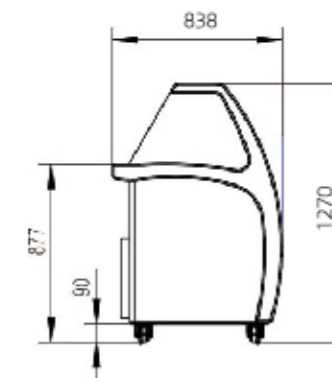

# Cube Ice



**Full Cube**  
22\*22\*22mm



**Half Cube**  
13\*19\*22mm

- Crystal clear classic cube ice
- Large contact surface ensures rapid cooling of drinks
- Cube thickness can be adjusted. Full-size and half-size can be choosed (partial models available)
- Perfect for coffee,tea and any drinks. Suitable for Chinese and Western restaurants,bars,convenience stores, hotels,etc

## CUBE ICE

AIR WATER 220V 50HZ AMBIENT TEMP 16°C WATER TEMP 10°C DIMENSIONS: WxDxH




\*the model shown in the picture is TIM-50A

- Lifting doors, removable air filter
- Front touchscreen
- LED lighting
- Automatic cleaning function


### TIM-50A

Dimensions (mm) :	500x 653x 800
Production/24h (Kg) :	50
Storage Capacity (Kg) :	25
Power (w) :	460

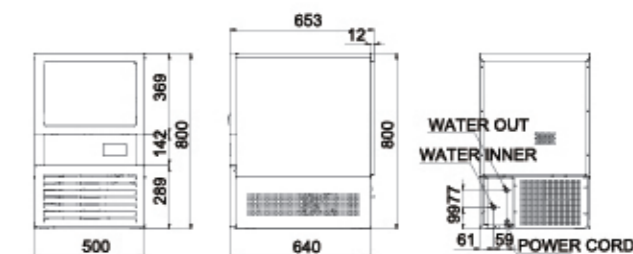


### TIM-75A

Dimensions (mm) :	660x 653 x 800
Production/24h (Kg) :	75
Storage Capacity (Kg) :	40
Power (w) :	700

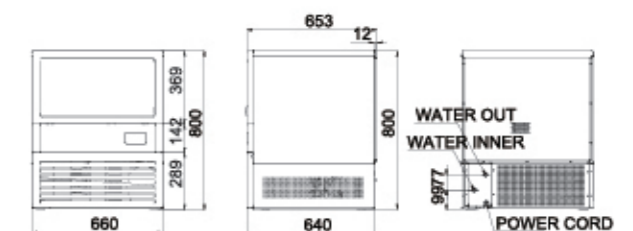

### TIM-100A

Dimensions (mm) :	660 x 653x 1010
Production/24h (Kg) :	100
Storage Capacity (Kg) :	65
Power (w) :	770

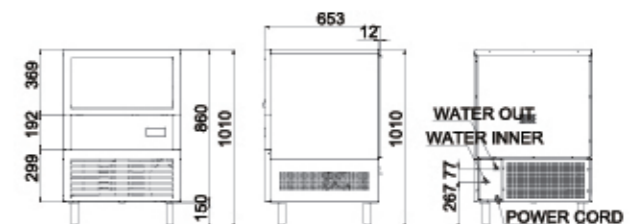


# CUBE ICE

AIR
WATER
220V 50HZ
AMBIENT TEMP 16°C
WATER TEMP 10°C
DIMENSIONS: WxDxH




## TIM-100AF TIM-100WF

Dimensions (mm) :	660x690x990
Production/24h (Kg) :	100
Storage Capacity (Kg) :	35
Power (w) :	<span>AIR</span> 650 <span>WATER</span> 600

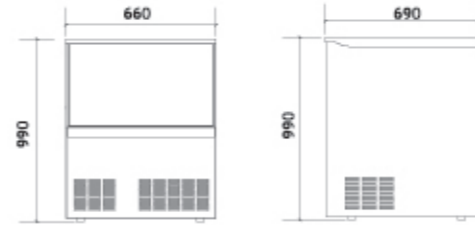

## TIM-125AF TIM-125WF

Dimensions (mm) :	660x690x990
Production/24h (Kg) :	125
Storage Capacity (Kg) :	35
Power (w) :	<span>AIR</span> 750 <span>WATER</span> 700

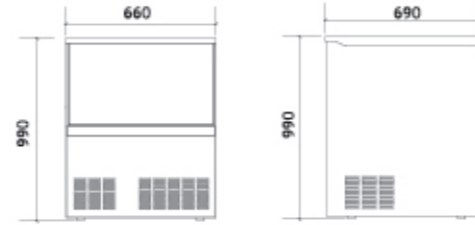

# CUBE ICE


AIR
WATER
220V 50HZ
AMBIENT TEMP 16°C
WATER TEMP 10°C
DIMENSIONS: WxDxH



\*the model shown in the picture is TIM-200AF

## TIM-200AF TIM-200WF


Dimensions (mm) :	760x800x1630
Production/24h (Kg) :	200
Storage Capacity (Kg) :	200
Power (w) :	<span>AIR</span> 800 <span>WATER</span> 750



TIM-200AF/TIM-200WF  
STANDARD CONFIGURATION TIB-400

## TIM-300AF TIM-300WF


Dimensions (mm) :	760x800x1630
Production/24h (Kg) :	300
Storage Capacity (Kg) :	200
Power (w) :	<span>AIR</span> 1200 <span>WATER</span> 1100



TIM-300AF/TIM-300WF  
STANDARD CONFIGURATION TIB-400

## TIM-460AF TIM-460WF

Dimensions (mm) :	760x880x2050
Production/24h (Kg) :	460
Storage Capacity (Kg) :	300
Power (w) :	<span>AIR</span> 2200 <span>WATER</span> 2100



TIM-460AF/TIM-460WF  
STANDARD CONFIGURATION TIB-600

### Available on Bins



TIB-400

TIB-600

### Key Features

- Gapless design to keep dust out
- Inner liner one-step forming
- Inner liner material: LLDPE for sanitary ice storage

# Crescent Ice



Dimensions  
37\*30\*13mm

- Unique shape makes the drink look more vivid
- Running water naturally makes crystal clear ice cubes, rinsing out impurities
- Smooth and round in the mouth
- Perfect for coffee, tea and any drinks. Suitable for Chinese and Western restaurants, bars, convenience stores, hotels, etc

## CRESCENT ICE

+ AIR 
 + WATER 
 + 220V 50HZ 
 + AMBIENT TEMP 16°C 
 + WATER TEMP 10°C 
 + DIMENSIONS: WxDxH



### + TCM-75A

### + TCM-100A

### + TCM-125A

Dimensions (mm) :	660x690x990	660x690x990	660x690x990
Production/24h (Kg) :	75	100	125
Storage Capacity (Kg) :	35	35	35
Power (w) :	650	650	750




### + TCM-200A + TCM-200W


### + TCM-300A + TCM-300W

### + TCM-450A + TCM-450W


Dimensions (mm) :	760x800x1760	760x880x1960	760x880x1960
Production/24h (Kg) :	200	300	450
Storage Capacity (Kg) :	200	300	300
Power (w) :	<span style="color: green;">+</span> 800 <span style="color: blue;">+</span> 750	<span style="color: green;">+</span> 1200 <span style="color: blue;">+</span> 1100	<span style="color: green;">+</span> 2200 <span style="color: blue;">+</span> 2100



STANDARD CONFIGURATION TIB-400



STANDARD CONFIGURATION TIB-600



STANDARD CONFIGURATION TIB-600

# Snowflake Ice



- Low moisture content, good plasticity, slow-melting
- Effectively maintain the original humidity of food
- The cubelet dimensions can be adjusted as needed.
- Suitable for supermarkets, seafood markets, hot pot restaurants, Japanese restaurants, buffet restaurants, as well as bars, etc

## SNOWFLAKE ICE

❄️ AIR  
 💧 WATER  
 ⚡ 220V 50HZ  
 🏠 AMBIENT TEMP 16°C  
 🌡️ WATER TEMP 10°C  
 📏 DIMENSIONS: WxDxH



\*the model shown in the picture is TSF-200A




\*the model shown in the picture is TSF-300A

❄️ TSF-200A  
💧 TSF-200W


❄️ TSF-300A  
💧 TSF-300W

❄️ TSF-500A  
💧 TSF-500W


Dimensions (mm) :	560×800×1650	760×800×1825	760×880×2015
Production/24h (Kg) :	200	300	500
Storage Capacity (Kg) :	150	200	300
Power (w) :	<span style="color: green;">❄️</span> 1000 <span style="color: blue;">💧</span> 950	<span style="color: green;">❄️</span> 1200 <span style="color: blue;">💧</span> 1100	<span style="color: green;">❄️</span> 1650 <span style="color: blue;">💧</span> 1550



STANDARD CONFIGURATION TIB-200



STANDARD CONFIGURATION TIB-400



STANDARD CONFIGURATION TIB-600

### Available on Bins



### Key Features

- Gapless design to keep dust out
- Inner liner one-step forming
- Inner liner material: LLDPE for sanitary ice storage

# Top Hat Ice



**Dimensions**  
13\*19\*22mm

- Unique appearance
- Spray water system makes ice internal temperature lower and more slow-melting
- Rapidly cooling the drinks with slow-melting ice, the beverages maintain their inherent flavor
- Recommended for use in coffee shops, bubble tea cafes, bars, or the other places that require slow-melting ice.

## TOP HAT ICE


+ AIR   
 + WATER   
 + 220V 50HZ   
 + AMBIENT TEMP 16°C   
 + WATER TEMP 10°C   
 + DIMENSIONS: WxDxH



+ THM-70A  
+ THM-70W

+ THM-100A  
+ THM-100W

Dimensions (mm) :	660x635x990		660x635x990	
Production/24h (Kg) :	70		100	
Storage Capacity (Kg) :	35		35	
Power (w) :	<span style="color: green;">+</span> 650	<span style="color: blue;">+</span> 600	<span style="color: green;">+</span> 750	<span style="color: blue;">+</span> 700

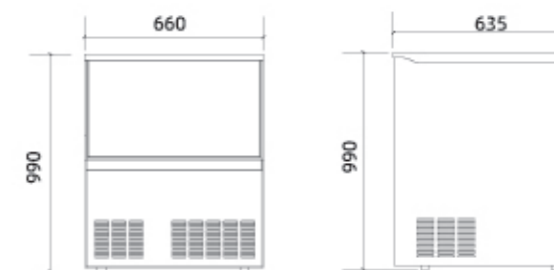

## Ice Storage Bucket



## ICE STORAGE BUCKET



**TIB-200**

Dimensions (mm) :	560*800*1060
Storage Capacity (Kg) :	150



**TIB-400**

Dimensions (mm) :	760*800*1060
Storage Capacity (Kg) :	200








**TIB-600**





Dimensions (mm) :	760*880*1250
Storage Capacity (Kg) :	300





- LLDPE is used for inner liner, which has high strength, good toughness, heat and cold resistance, acid and alkali resistance
- Inner liner one-step forming, gapless design to keep dust out
- SUS304 stainless steel exterior for long-lasting attractive appearance

## Technical Data Sheet





Reach-In Refrigerators & Freezers / P-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Reach-In Refrigerators	PR25-1-N	Refrigerators	640x860x1926	574	1°C-8°C	1	3	R290	1/4	1.5	202	77
Reach-In Freezers	PF25-1-N	Freezers	640x860x1926	574	-21°C--12°C	1	3	R290	1/2	2.3	362.5	80
Reach-In Refrigerators	PR25-2-N	Refrigerators	640x860x1926	572	1°C-8°C	2	3	R290	1/4	1.5	209.3	77
Reach-In Freezers	PF25-2-N	Freezers	640x860x1926	572	-21°C--12°C	2	3	R290	1/2	2.3	374.6	80
Reach-In Refrigerators	PR45-2-N	Refrigerators	1260x860x1926	1215	1°C-8°C	2	6	R290	1/4	1.6	220	142
Reach-In Freezers	PF45-2-N	Freezers	1260x860x1926	1215	-21°C--12°C	2	6	R290	3/4	2.8	505.5	142
Reach-In Refrigerators	PR45-4-N	Refrigerators	1260x860x1926	1210	1°C-8°C	4	6	R290	1/4	1.6	233.2	142
Reach-In Freezers	PF45-4-N	Freezers	1260x860x1926	1210	-21°C--12°C	4	6	R290	3/4	2.8	527.5	142
Reach-In Refrigerators	PR65-3-N	Refrigerators	1900x860x1926	1876	1°C-8°C	3	9	R290	1/2	2.13	610	167
Reach-In Freezers	PF65-3-N	Freezers	1900x860x1926	1876	-21°C--12°C	3	9	R290	1/2x2	4.3	1210	167
Reach-In Refrigerators	PR65-6-N	Refrigerators	1900x860x1926	1868	1°C-8°C	6	9	R290	1/2	2.13	615	167
Reach-In Freezers	PF65-6-N	Freezers	1900x860x1926	1868	-21°C--12°C	6	9	R290	1/2x2	4.3	1215	167

Reach-In Refrigerators & Freezers / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Reach-In Refrigerators	KR25-1-N	Refrigerators	640x860x1926	574	1°C-8°C	1	3	R290	1/4	2.8	1570	77
Reach-In Freezers	KF25-1-N	Freezers	640x860x1926	574	-21°C--12°C	1	3	R290	2/3	3.5	4640	80
Reach-In Refrigerators	KR25-2-N	Refrigerators	640x860x1926	572	1°C-8°C	2	3	R290	1/4	2.8	1650	77
Reach-In Freezers	KF25-2-N	Freezers	640x860x1926	572	-21°C--12°C	2	3	R290	2/3	3.5	4740	80
Reach-In Refrigerators	KR45-2-N	Refrigerators	1260x860x1926	1215	1°C-8°C	2	6	R290	1/3	3.5	2560	142
Reach-In Freezers	KF45-2-N	Freezers	1260x860x1926	1215	-21°C--12°C	2	6	R290	1	5.3	6740	142
Reach-In Refrigerators	KR45-4-N	Refrigerators	1260x860x1926	1210	1°C-8°C	4	6	R290	1/3	3.5	2630	142
Reach-In Freezers	KF45-4-N	Freezers	1260x860x1926	1210	-21°C--12°C	4	6	R290	1	5.3	7110	142
Reach-In Refrigerators	KR65-3-N	Refrigerators	1900x860x1926	1876	1°C-8°C	3	9	R290	3/4	6	3360	167
Reach-In Freezers	KF65-3-N	Freezers	1900x860x1926	1876	-21°C--12°C	3	9	R290	3/4x2	8.5	12820	167
Reach-In Refrigerators	KR65-6-N	Refrigerators	1900x860x1926	1868	1°C-8°C	6	9	R290	3/4	6	3380	167
Reach-In Freezers	KF65-6-N	Freezers	1900x860x1926	1868	-21°C--12°C	6	9	R290	3/4x2	8.5	12810	167





Reach-In Refrigerators & Freezers / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Reach-In Refrigerators Glass Door	KR25-1G-N	Refrigerators	640x860x1926	574	1°C-8°C	1	3	R290	1/4	2.8	2590	87
Reach-In Freezers Glass Door	KF25-1G-N	Freezers	640x860x1926	574	-21°C--12°C	1	3	R290	6/7	4.5	7050	95
Reach-In Refrigerators Glass Door	KR25-2G-N	Refrigerators	640x860x1926	572	1°C-8°C	2	3	R290	1/4	2.8	2640	87
Reach-In Freezers Glass Door	KF25-2G-N	Freezers	640x860x1926	572	-21°C--12°C	2	3	R290	6/7	4.5	6920	95
Reach-In Refrigerators Glass Door	KR45-2G-N	Refrigerators	1260x860x1926	1215	1°C-8°C	2	6	R290	1/3	2.9	4201	152
Reach-In Freezers Glass Door	KF45-2G-N	Freezers	1260x860x1926	1215	-21°C--12°C	2	6	R290	2/3x2	8	11370	170
Reach-In Refrigerators Glass Door	KR45-4G-N	Refrigerators	1260x860x1926	1210	1°C-8°C	4	6	R290	1/3	3.5	4250	152
Reach-In Freezers Glass Door	KF45-4G-N	Freezers	1260x860x1926	1210	-21°C--12°C	4	6	R290	2/3x2	8	11260	170
Reach-In Refrigerators Glass Door	KR65-3G-N	Refrigerators	1900x860x1926	1876	1°C-8°C	3	9	R290	1/3x2	6	6210	177
Reach-In Refrigerators Glass Door	KR65-6G-N	Refrigerators	1900x860x1926	1868	1°C-8°C	6	9	R290	1/3x2	6	6270	177

Reach-In Refrigerators & Freezers / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Reach-In Refrigerators	KR25-1	Refrigerators	640x860x1926	574	1°C-8°C	1	3	R134a	1/4	2.8	314	77
Reach-In Freezers	KF25-1	Freezers	640x860x1926	574	-21°C--12°C	1	3	R404A	2/3	3.5	496	80
Reach-In Refrigerators	KR25-2	Refrigerators	640x860x1926	572	1°C-8°C	2	3	R134a	1/4	2.8	314	77
Reach-In Freezers	KF25-2	Freezers	640x860x1926	572	-21°C--12°C	2	3	R404A	2/3	3.5	496	80
Reach-In Refrigerators	KR45-2	Refrigerators	1260x860x1926	1215	1°C-8°C	2	6	R134a	1/3	3.5	366	142
Reach-In Freezers	KF45-2	Freezers	1260x860x1926	1215	-21°C--12°C	2	6	R404A	1	5.3	774	142
Reach-In Refrigerators	KR45-4	Refrigerators	1260x860x1926	1210	1°C-8°C	4	6	R134a	1/3	3.5	366	142
Reach-In Freezers	KF45-4	Freezers	1260x860x1926	1210	-21°C--12°C	4	6	R404A	1	5.3	774	142
Reach-In Refrigerators	KR65-3	Refrigerators	1900x860x1926	1876	1°C-8°C	3	9	R134a	3/4	6	732	167
Reach-In Freezers	KF65-3	Freezers	1900x860x1926	1876	-21°C--12°C	3	9	R404A	3/4x2	8.5	1346	167
Reach-In Refrigerators	KR65-6	Refrigerators	1900x860x1926	1868	1°C-8°C	6	9	R134a	3/4	6	732	167
Reach-In Freezers	KF65-6	Freezers	1900x860x1926	1868	-21°C--12°C	6	9	R404A	3/4x2	8.5	1346	167





## Technical Data Sheet





Reach-In Refrigerators & Freezers / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves/pans	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Reach-In Dual Temp	KRF25-2	Dual Temp	640x860x1926	242/222	1°C-8°C/-21°C--12°C	2	2	R404A	1/2	3.5	366	85
Reach-In Dual Temp	KFR25-2	Dual Temp	640x860x1926	242/222	1°C-8°C/-21°C--12°C	2	2	R404A	1/2	3.5	366	85
Reach-In Dual Temp	KRF45-2H	Dual Temp	1260x860x1926	576/576	1°C-8°C/-21°C--12°C	2	6	R134a/R404A	1/3 / 1/2	4.5	732	152
Reach-In Dual Temp	KRF45-4H	Dual Temp	1260x860x1926	576/576	1°C-8°C/-21°C--12°C	4	6	R134a/R404A	1/3 / 1/2	4.5	732	152
Reach-In Dual Temp	KRF65-3	Dual Temp	1900x860x1926	575/1235	1°C-8°C/-21°C--12°C	3	9	R134a/R404A	1/3 / 3/4	5.5	1098	177
Reach-In Dual Temp	KRF65-6	Dual Temp	1900x860x1926	575/1235	1°C-8°C/-21°C--12°C	6	9	R134a/R404A	1/3 / 3/4	5.5	1098	177
Reach-In Dual Temp	KRF65-6F	Dual Temp	1900x860x1926	575/1235	1°C-8°C/-21°C--12°C	6	9	R134a/R404A	1/3 / 3/4	5.5	1098	177
Reach-In Refrigerators Bun Pan	KR25-1P	Refrigerators	640x860x1926	574	1°C-8°C	1	14 pans	R134a	1/4	2.8	314	77
Reach-In Freezers Bun Pan	KF25-1P	Freezers	640x860x1926	574	-21°C--12°C	1	14 pans	R404A	2/3	3.5	496	80
Reach-In Refrigerators Bun Pan	KR25-2P	Refrigerators	640x860x1926	572	1°C-8°C	2	14 pans	R134a	1/4	2.8	314	77
Reach-In Freezers Bun Pan	KF25-2P	Freezers	640x860x1926	572	-21°C--12°C	2	14 pans	R404A	2/3	3.5	496	80
Reach-In Refrigerators Bun Pan	KR45-2P	Refrigerators	1260x860x1926	1215	1°C-8°C	2	14 pansx2	R134a	1/3	3.5	366	142
Reach-In Freezers Bun Pan	KF45-2P	Freezers	1260x860x1926	1215	-21°C--12°C	2	14 pansx2	R404A	1	5.3	774	142
Reach-In Refrigerators Bun Pan	KR45-4P	Refrigerators	1260x860x1926	1210	1°C-8°C	4	14 pansx2	R134a	1/3	3.5	366	142
Reach-In Freezers Bun Pan	KF45-4P	Freezers	1260x860x1926	1210	-21°C--12°C	4	14 pansx2	R404A	1	5.3	774	142
Reach-In Refrigerators Bun Pan	KR65-3P	Refrigerators	1900x860x1926	1876	1°C-8°C	3	14 pansx3	R134a	3/4	6	732	167
Reach-In Freezers Bun Pan	KF65-3P	Freezers	1900x860x1926	1876	-21°C--12°C	3	14 pansx3	R404A	3/4x2	8.5	1346	167
Reach-In Refrigerators Bun Pan	KR65-6P	Refrigerators	1900x860x1926	1868	1°C-8°C	6	14 pansx3	R134a	3/4	6	732	167
Reach-In Freezers Bun Pan	KF65-6P	Freezers	1900x860x1926	1868	-21°C--12°C	6	14 pansx3	R404A	3/4x2	8.5	1346	167
Reach-In Dual Temp Bun Pan	KRF25-2P	Dual Temp	640x860x1926	242/222	1°C-8°C/-21°C--12°C	2	6 pansx2	R404A	1/2	3.5	366	85
Reach-In Dual Temp Bun Pan	KRF45-2HP	Dual Temp	1260x860x1926	576/576	1°C-8°C/-21°C--12°C	2	14 pansx2	R134a/R404A	1/3 / 1/2	4.5	732	152
Reach-In Dual Temp Bun Pan	KRF45-4HP	Dual Temp	1260x860x1926	576/576	1°C-8°C/-21°C--12°C	4	14 pansx2	R134a/R404A	1/3 / 1/2	4.5	732	152
Reach-In Dual Temp Bun Pan	KRF65-3P	Dual Temp	1900x860x1926	575/1235	1°C-8°C/-21°C--12°C	3	14 pansx3	R134a/R404A	1/3 / 3/4	5.5	1098	177
Reach-In Dual Temp Bun Pan	KRF65-6P	Dual Temp	1900x860x1926	575/1235	1°C-8°C/-21°C--12°C	6	14 pansx3	R134a/R404A	1/3 / 3/4	5.5	1098	177
Reach-In Dual Temp Bun Pan	KRF65-6FP	Dual Temp	1900x860x1926	575/1235	1°C-8°C/-21°C--12°C	6	14 pansx3	R134a/R404A	1/3 / 3/4	5.5	1098	177

## Technical Data Sheet





Reach-In Refrigerators & Freezers / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Reach-In Refrigerators Glass Door	KR25-1G	Refrigerators	640x860x1926	574	1°C-8°C	1	3	R134a	1/4	2.8	314	87
Reach-In Freezers Glass Door	KF25-1G	Freezers	640x860x1926	574	-21°C--12°C	1	3	R404A	6/7	4.5	660	95
Reach-In Refrigerators Glass Door	KR25-2G	Refrigerators	640x860x1926	572	1°C-8°C	2	3	R134a	1/4	2.8	314	87
Reach-In Freezers Glass Door	KF25-2G	Freezers	640x860x1926	572	-21°C--12°C	2	3	R404A	6/7	4.5	660	95
Reach-In Refrigerators Glass Door	KR45-2G	Refrigerators	1260x860x1926	1215	1°C-8°C	2	6	R134a	1/3	2.9	365.4	152
Reach-In Freezers Glass Door	KF45-2G	Freezers	1260x860x1926	1215	-21°C--12°C	2	6	R404A	2/3x2	8	976	170
Reach-In Refrigerators Glass Door	KR45-4G	Refrigerators	1260x860x1926	1210	1°C-8°C	4	6	R134a	1/3	3.5	366	152
Reach-In Freezers Glass Door	KF45-4G	Freezers	1260x860x1926	1210	-21°C--12°C	4	6	R404A	2/3x2	8	976	170
Reach-In Refrigerators Glass Door	KR65-3G	Refrigerators	1900x860x1926	1876	1°C-8°C	3	9	R134a	1/3x2	6	732	177
Reach-In Refrigerators Glass Door	KR65-6G	Refrigerators	1900x860x1926	1868	1°C-8°C	6	9	R134a	1/3x2	6	732	177
Reach-In Refrigerators	CM3R24-1	Refrigerators	730x840x2106	665	1°C-8°C	1	3	R134a	1/4	2.3	338	115
Reach-In Freezers	CM3F24-1	Freezers	730x840x2106	665	-25°C--17°C	1	3	R404A	3/4	2.6	500	120
Reach-In Refrigerators	CM3R24-2	Refrigerators	730x840x2106	665	1°C-8°C	2	3	R134a	1/4	2.3	338	115
Reach-In Freezers	CM3F24-2	Freezers	730x840x2106	665	-25°C--17°C	2	3	R404A	3/4	2.6	500	120
Reach-In Refrigerators	CM3R47-2	Refrigerators	1314x840x2106	1277	1°C-8°C	2	6	R134a	1/3	2.8	389	190
Reach-In Freezers	CM3F47-2	Freezers	1314x840x2106	1277	-25°C--17°C	2	6	R404A	1	3.9	813	200
Reach-In Refrigerators	CM3R47-4	Refrigerators	1314x840x2106	1277	1°C-8°C	4	6	R134a	1/3	2.8	389	190
Reach-In Freezers	CM3F47-4	Freezers	1314x840x2106	1277	-25°C--17°C	4	6	R404A	1	3.9	813	200
Reach-In Refrigerators	CM3R72-3	Refrigerators	1976x840x2106	1968	1°C-8°C	3	9	R134a	1	3.8	490	280
Reach-In Freezers	CM3F72-3	Freezers	1976x840x2106	1968	-25°C--17°C	3	9	R404A	1-1/4	4.8	1050	280
Reach-In Refrigerators	CM3R72-6	Refrigerators	1976x840x2106	1968	1°C-8°C	6	9	R134a	1	3.8	490	280
Reach-In Freezers	CM3F72-6	Freezers	1976x840x2106	1968	-25°C--17°C	6	9	R404A	1-1/4	4.8	1050	280

## Technical Data Sheet

Undercounter Refrigerators & Freezers / P-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Undercounter Refrigerators	PUR9-1-N	Refrigerators	900x700x800	198	1°C-8°C	1	1	R290	1/5	1.2	158	72
Undercounter Freezers	PUF9-1-N	Freezers	900x700x800	198	-21°C--12°C	1	1	R290	1/3	1.5	246	72
Undercounter Refrigerators	PUR12-2-N	Refrigerators	1200x700x800	311	1°C-8°C	2	2	R290	1/5	1.4	158	84
Undercounter Freezers	PUF12-2-N	Freezers	1200x700x800	311	-21°C--12°C	2	2	R290	2/5	2.3	295	84
Undercounter Refrigerators	PUR15-2-N	Refrigerators	1500x700x800	425	1°C-8°C	2	2	R290	1/5	1.4	158	93
Undercounter Freezers	PUF15-2-N	Freezers	1500x700x800	425	-21°C--12°C	2	2	R290	2/5	2.3	300	93
Undercounter Refrigerators	PUR18-3-N	Refrigerators	1800x700x800	538	1°C-8°C	3	3	R290	1/4	1.5	179	109
Undercounter Freezers	PUF18-3-N	Freezers	1800x700x800	538	-21°C--12°C	3	3	R290	1/2	2.8	396	109





Undercounter Refrigerators & Freezers / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves/pans	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Undercounter Refrigerators (GN)	KUR9-1-N	Refrigerators	900x700x800	198	1°C-8°C	1	5 pans	R290	1/4	2.3	1140	72
Undercounter Freezers (GN)	KUF9-1-N	Freezers	900x700x800	198	-21°C--12°C	1	5 pans	R290	1/3	2.3	2690	72
Undercounter Refrigerators (GN)	KUR12-2-N	Refrigerators	1200x700x800	311	1°C-8°C	2	5 pansx2	R290	1/4	2.5	1390	84
Undercounter Freezers (GN)	KUF12-2-N	Freezers	1200x700x800	311	-21°C--12°C	2	5 pansx2	R290	1/3	2.5	3250	84
Undercounter Refrigerators (GN)	KUR15-2-N	Refrigerators	1500x700x800	425	1°C-8°C	2	5 pansx2	R290	1/4	2.5	1670	93
Undercounter Freezers (GN)	KUF15-2-N	Freezers	1500x700x800	425	-21°C--12°C	2	5 pansx2	R290	3/4	3.0	4190	93
Undercounter Refrigerators (GN)	KUR18-3-N	Refrigerators	1800x700x800	538	1°C-8°C	3	5 pansx3	R290	1/3	3.0	1820	109
Undercounter Freezers (GN)	KUF18-3-N	Freezers	1800x700x800	538	-21°C--12°C	3	5 pansx3	R290	3/4	4.4	5080	109

Undercounter Refrigerators	KUR9-1S-N	Refrigerators	900x600x800	198	1°C-8°C	1	5 pans	R290	1/4	2.3	1100	72
Undercounter Freezers	KUF9-1S-N	Freezers	900x600x800	198	-21°C--12°C	1	5 pans	R290	1/3	2.3	2600	72
Undercounter Refrigerators	KUR12-2S-N	Refrigerators	1200x600x800	311	1°C-8°C	2	5 pansx2	R290	1/4	2.5	1350	84
Undercounter Freezers	KUF12-2S-N	Freezers	1200x600x800	311	-21°C--12°C	2	5 pansx2	R290	1/3	2.5	84	84
Undercounter Refrigerators	KUR15-2S-N	Refrigerators	1500x600x800	425	1°C-8°C	2	5 pansx2	R290	1/4	2.5	1650	93
Undercounter Freezers	KUF15-2S-N	Freezers	1500x600x800	425	-21°C--12°C	2	5 pansx2	R290	3/4	3.0	93	93
Undercounter Refrigerators	KUR18-3S-N	Refrigerators	1800x600x800	538	1°C-8°C	3	5 pansx3	R290	1/3	3.0	1750	109
Undercounter Freezers	KUF18-3S-N	Freezers	1800x600x800	538	-21°C--12°C	3	5 pansx3	R290	3/4	4.4	4450	109





Undercounter Refrigerators & Freezers / K-Series													
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves/pans	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)	
Undercounter Refrigerators Bun Pan	KUR15-2P-N	Refrigerators	1500x760x800	444	1°C-8°C	2	7 pansx2	R290	1/4	2.5	1670	96	
Undercounter Freezers Bun Pan	KUF15-2P-N	Freezers	1500x760x800	444	-21°C--12°C	2	7 pansx2	R290	3/4	3.0	4190	96	
Undercounter Refrigerators Bun Pan	KUR18-3P-N	Refrigerators	1800x760x800	562	1°C-8°C	3	7 pansx3	R290	1/3	3.0	1820	115	
Undercounter Freezers Bun Pan	KUF18-3P-N	Freezers	1800x760x800	562	-21°C--12°C	3	7 pansx3	R290	3/4	4.4	5080	115	





Undercounter Refrigerators Glass Door	KGR9-1-N	Refrigerators	900x700x800	198	1°C-8°C	1	1	R290	1/4	2.3	1205	80
Undercounter Refrigerators Glass Door	KGR12-2-N	Refrigerators	1200x700x800	311	1°C-8°C	2	2	R290	1/4	2.5	1750	96
Undercounter Refrigerators Glass Door	KGR15-2-N	Refrigerators	1500x700x800	425	1°C-8°C	2	2	R290	1/4	2.5	2470	110
Undercounter Refrigerators Glass Door	KGR18-3-N	Refrigerators	1800x700x800	538	1°C-8°C	3	3	R290	1/3	3.0	2980	127

Undercounter Refrigerators & Freezers / K-Series													
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)	
Undercounter Refrigerators	KUR9-1 (700)	Refrigerators	900x700x800	198	1°C-8°C	1	1	R134a	1/4	2.3	314	72	
Undercounter Freezers	KUF9-1 (700)	Freezers	900x700x800	198	-21°C--12°C	1	1	R134a	1/3	2.3	366	72	
Undercounter Refrigerators	KUR12-2 (700)	Refrigerators	1200x700x800	311	1°C-8°C	2	2	R134a	1/4	2.5	314	84	
Undercounter Freezers	KUF12-2 (700)	Freezers	1200x700x800	311	-21°C--12°C	2	2	R404A	1/3	2.5	613	84	
Undercounter Refrigerators	KUR15-2 (700)	Refrigerators	1500x700x800	425	1°C-8°C	2	2	R134a	1/4	2.5	314	93	
Undercounter Freezers	KUF15-2 (700)	Freezers	1500x700x800	425	-21°C--12°C	2	2	R404A	3/4	3	613	93	
Undercounter Refrigerators	KUR18-3 (700)	Refrigerators	1800x700x800	538	1°C-8°C	3	3	R134a	1/3	3.0	366	109	
Undercounter Freezers	KUF18-3 (700)	Freezers	1800x700x800	538	-21°C--12°C	3	3	R404A	3/4	4.4	613	109	
Undercounter Refrigerators	KUR9-1 (600)	Refrigerators	900x600x800	149	1°C-8°C	1	1	R134a	1/4	2.3	314	72	
Undercounter Freezers	KUF9-1 (600)	Freezers	900x600x800	149	-21°C--12°C	1	1	R134a	1/3	2.3	366	72	
Undercounter Refrigerators	KUR12-2 (600)	Refrigerators	1200x600x800	234	1°C-8°C	2	2	R134a	1/4	2.5	314	84	
Undercounter Freezers	KUF12-2 (600)	Freezers	1200x600x800	234	-21°C--12°C	2	2	R404A	1/3	2.5	613	84	
Undercounter Refrigerators	KUR15-2 (600)	Refrigerators	1500x600x800	319	1°C-8°C	2	2	R134a	1/4	2.5	314	93	
Undercounter Freezers	KUF15-2 (600)	Freezers	1500x600x800	319	-21°C--12°C	2	2	R404A	3/4	3	613	93	
Undercounter Refrigerators	KUR18-3 (600)	Refrigerators	1800x600x800	400	1°C-8°C	3	3	R134a	1/3	3.0	366	109	
Undercounter Freezers	KUF18-3 (600)	Freezers	1800x600x800	400	-21°C--12°C	3	3	R404A	3/4	4.4	613	109	





## Technical Data Sheet





Undercounter Refrigerators & Freezers / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves/pans	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Undercounter Dual Temp	KURF12-2	Dual Temp	1200x700x800	121/136	1°C-8°C/-21°C--12°C	2	2	R134a	1/3	3	316	92
Undercounter Dual Temp	KURF15-2	Dual Temp	1500x700x800	171/191	1°C-8°C/-21°C--12°C	2	2	R404A	3/4	4.35	336	101
Undercounter Dual Temp	KURF18-3	Dual Temp	1800x700x800	151/287	1°C-8°C/-21°C--12°C	3	3	R404A	3/4	4.4	366	120
Undercounter Refrigerators Bun Pan	KUR15-2P	Refrigerators	1500x760x800	444	1°C-8°C	2	7 pansx2	R134a	1/4	2.5	314	96
Undercounter Freezers Bun Pan	KUF15-2P	Freezers	1500x760x800	444	-21°C--12°C	2	7 pansx2	R404A	3/4	3.0	613	96
Undercounter Refrigerators Bun Pan	KUR18-3P	Refrigerators	1800x760x800	562	1°C-8°C	3	7 pansx3	R404A	1/3	3.0	366	115
Undercounter Freezers Bun Pan	KUF18-3P	Freezers	1800x760x800	562	-21°C--12°C	3	7 pansx3	R404A	3/4	4.4	613	115
Undercounter Refrigerators (GN)	KUR9-1 (GN)	Refrigerators	900x700x800	198	1°C-8°C	1	2 pans	R134a	1/4	2.3	314	72
Undercounter Freezers (GN)	KUF9-1 (GN)	Freezers	900x700x800	198	-21°C--12°C	1	5 pans	R134a	1/3	2.3	366	72
Undercounter Refrigerators (GN)	KUR12-2 (GN)	Refrigerators	1200x700x800	311	1°C-8°C	2	5 pansx2	R134a	1/4	2.5	314	84
Undercounter Freezers (GN)	KUF12-2 (GN)	Freezers	1200x700x800	311	-21°C--12°C	2	5 pansx2	R404A	1/3	2.5	613	84
Undercounter Refrigerators (GN)	KUR15-2 (GN)	Refrigerators	1500x700x800	425	1°C-8°C	2	5 pansx2	R134a	1/4	2.5	314	93
Undercounter Freezers (GN)	KUF15-2 (GN)	Freezers	1500x700x800	425	-21°C--12°C	2	5 pansx2	R404A	3/4	3.0	613	93
Undercounter Refrigerators (GN)	KUR18-3 (GN)	Refrigerators	1800x700x800	538	1°C-8°C	3	5 pansx3	R134a	1/3	3.0	366	109
Undercounter Freezers (GN)	KUF18-3 (GN)	Freezers	1800x700x800	538	-21°C--12°C	3	5 pansx3	R404A	3/4	4.4	613	109
Undercounter Refrigerators Glass Door	KGR9-1	Refrigerators	900x700x800	198	1°C-8°C	1	1	R134a	1/4	2.3	314	80
Undercounter Refrigerators Glass Door	KGR12-2	Refrigerators	1200x700x800	311	1°C-8°C	2	2	R134a	1/4	2.5	314	96
Undercounter Refrigerators Glass Door	KGR15-2	Refrigerators	1500x700x800	425	1°C-8°C	2	2	R134a	1/4	2.5	314	110
Undercounter Refrigerators Glass Door	KGR18-3	Refrigerators	1800x700x800	538	1°C-8°C	3	3	R134a	1/3	3.0	366	127

## Technical Data Sheet





Undercounter Refrigerators & Freezers / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Undercounter Refrigerators Drawers	KUR9-2D-2	Refrigerators	900x700x800	198	1°C-8°C	0	0	R134a	1/4	2.3	314	84
Undercounter Freezers Drawers	KUF9-2D-2	Freezers	900x700x800	198	-21°C--12°C	0	0	R134a	1/3	3.0	366	84
Undercounter Refrigerators Drawers	KUR12-2D-2	Refrigerators	1200x700x800	311	1°C-8°C	1	1	R134a	1/4	2.5	314	97
Undercounter Freezers Drawers	KUF12-2D-2	Freezers	1200x700x800	311	-21°C--12°C	1	1	R134a	1/3	3.3	366	97
Undercounter Refrigerators Drawers	KUR12-2D-4	Refrigerators	1200x700x800	311	1°C-8°C	0	0	R134a	1/4	2.5	314	106
Undercounter Freezers Drawers	KUF12-2D-4	Freezers	1200x700x800	311	-21°C--12°C	0	0	R134a	1/3	3.3	366	106
Undercounter Refrigerators Drawers	KUR15-2D-2	Refrigerators	1500x700x800	425	1°C-8°C	1	1	R134a	1/4	2.5	314	107
Undercounter Freezers Drawers	KUF15-2D-2	Freezers	1500x700x800	425	-21°C--12°C	1	1	R404A	3/4	4.4	366	107
Undercounter Refrigerators Drawers	KUR15-2D-4	Refrigerators	1500x700x800	425	1°C-8°C	0	0	R134a	1/4	2.5	314	116
Undercounter Freezers Drawers	KUF15-2D-4	Freezers	1500x700x800	425	-21°C--12°C	0	0	R404A	3/4	4.4	366	116
Undercounter Refrigerators Drawers	KUR18-2D-2	Refrigerators	1800x700x800	538	1°C-8°C	2	2	R134a	1/3	3.0	366	126
Undercounter Refrigerators Drawers	KUR18-2D-4	Refrigerators	1800x700x800	538	1°C-8°C	1	1	R134a	1/3	3.0	366	135
Undercounter Refrigerators Drawers	KUR18-2D-6	Refrigerators	1800x700x800	538	1°C-8°C	0	0	R134a	1/3	3.0	366	144
Undercounter Refrigerators Drawers	KUR9-3D-3	Refrigerators	900x700x800	198	1°C-8°C	0	0	R134a	1/4	2.3	314	84
Undercounter Freezers Drawers	KUF9-3D-3	Freezers	900x700x800	198	-21°C--12°C	0	0	R134a	1/3	3.0	366	84
Undercounter Refrigerators Drawers	KUR12-3D-3	Refrigerators	1200x700x800	311	1°C-8°C	1	1	R134a	1/4	2.5	314	97
Undercounter Freezers Drawers	KUF12-3D-3	Freezers	1200x700x800	311	-21°C--12°C	1	1	R134a	1/3	3.3	366	97
Undercounter Refrigerators Drawers	KUR12-3D-6	Refrigerators	1200x700x800	311	1°C-8°C	0	0	R134a	1/4	2.5	314	106
Undercounter Freezers Drawers	KUF12-3D-6	Freezers	1200x700x800	311	-21°C--12°C	0	0	R134a	1/3	3.3	366	106
Undercounter Refrigerators Drawers	KUR15-3D-3	Refrigerators	1500x700x800	425	1°C-8°C	1	1	R134a	1/4	2.5	314	107
Undercounter Freezers Drawers	KUF15-3D-3	Freezers	1500x700x800	425	-21°C--12°C	1	1	R404A	3/4	4.4	366	107
Undercounter Refrigerators Drawers	KUR15-3D-6	Refrigerators	1500x700x800	425	1°C-8°C	0	0	R134a	1/4	2.5	314	116
Undercounter Freezers Drawers	KUF15-3D-6	Freezers	1500x700x800	425	-21°C--12°C	0	0	R404A	3/4	4.4	366	116
Undercounter Refrigerators Drawers	KUR18-3D-3	Refrigerators	1800x700x800	538	1°C-8°C	2	2	R134a	1/3	3.0	366	126
Undercounter Refrigerators Drawers	KUR18-3D-6	Refrigerators	1800x700x800	538	1°C-8°C	1	1	R134a	1/3	3.0	366	135
Undercounter Refrigerators Drawers	KUR18-3D-9	Refrigerators	1800x700x800	538	1°C-8°C	0	0	R134a	1/3	3.0	366	144





## Technical Data Sheet





Undercounter Refrigerators & Freezers / M-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Undercounter Refrigerators	CMUR-28	Refrigerators	698x762x903	184	1°C-8°C	1	1	R134a	1/4	2.8	314	85
Undercounter Freezers	CMUF-28	Freezers	698x762x903	184	-25°C--17°C	1	1	R134a	1/3	3	314	85
Undercounter Refrigerators	CMUR-48	Refrigerators	1225x762x903	340	1°C-8°C	2	2	R134a	1/3	3.5	366	105
Undercounter Freezers	CMUF-48	Freezers	1225x762x903	340	-25°C--17°C	2	2	R404A	1/2	4.0	477	105
Undercounter Refrigerators	CMUR-60	Refrigerators	1530x762x903	506	1°C-8°C	2	2	R134a	1/3	3.8	440	135
Undercounter Freezers	CMUF-60	Freezers	1530x762x903	506	-25°C--17°C	2	2	R404A	1/2	5.3	477	135
Undercounter Refrigerators	CMUR-72	Refrigerators	1846x762x903	538	1°C-8°C	3	3	R134a	1/3	5.3	440	160
Undercounter Refrigerators Drawers	CMUR-28-D2	Refrigerators	698x762x903	184	1°C-8°C	0	0	R134a	1/4	2.8	314	90
Undercounter Freezers Drawers	CMUF-28-D2	Freezers	698x762x903	184	-25°C--17°C	0	0	R134a	1/3	3.8	366	90
Undercounter Refrigerators Drawers	CMUR-48-D2	Refrigerators	1225x762x903	340	1°C-8°C	1	1	R134a	1/3	3.5	366	110
Undercounter Freezers Drawers	CMUF-48-D2	Freezers	1225x762x903	340	-25°C--17°C	1	1	R404A	1/2	3.5	477	110
Undercounter Refrigerators Drawers	CMUR-48-D4	Refrigerators	1225x762x903	340	1°C-8°C	0	0	R134a	1/3	3.5	366	115
Undercounter Freezers Drawers	CMUF-48-D4	Freezers	1225x762x903	340	-25°C--17°C	0	0	R404A	1/2	6	477	115
Undercounter Refrigerators (LOW BOY)	CMUR-28L	Refrigerators	698x762x771	175	1°C-8°C	1	1	R134a	1/4	2.8	314	75
Undercounter Refrigerators (LOW BOY)	CMUR-36L	Refrigerators	923x762x771	236	1°C-8°C	2	2	R134a	1/4	2.8	314	89

Food Prep Tables / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Salad Prep Tables	KSR9-1	Refrigerators	900x700x800	213	1°C-8°C	1	1	R134a	1/4	2.3	314	70
Salad Prep Tables	KSR12-2	Refrigerators	1200x700x800	309	1°C-8°C	2	2	R134a	1/4	2.5	314	82
Salad Prep Tables	KSR15-2	Refrigerators	1500x700x800	420	1°C-8°C	2	2	R134a	1/4	2.5	314	91
Salad Prep Tables	KSR18-3	Refrigerators	1800x700x800	516	1°C-8°C	3	3	R134a	1/3	3.0	366	107
Salad Prep Tables (Hood Lid)	KHR9-1	Refrigerators	900x700x978	213	1°C-8°C	1	1	R134a	1/4	2.3	314	75
Salad Prep Tables (Hood Lid)	KHR12-2	Refrigerators	1200x700x978	309	1°C-8°C	2	2	R134a	1/4	2.5	314	89
Salad Prep Tables (Hood Lid)	KHR15-2	Refrigerators	1500x700x978	420	1°C-8°C	2	2	R134a	1/4	2.5	314	100
Salad Prep Tables (Hood Lid)	KHR18-3	Refrigerators	1800x700x978	516	1°C-8°C	3	3	R134a	1/3	3.0	366	120




## Technical Data Sheet




Food Prep Tables / K-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Pizza Table	KTR9-1	Refrigerators	900x700x919	213	1°C-8°C	1	1	R134a	1/4	2.3	314	75
Pizza Table	KTR12-2	Refrigerators	1200x700x919	309	1°C-8°C	2	2	R134a	1/4	2.5	314	89
Pizza Table	KTR15-2	Refrigerators	1500x700x919	420	1°C-8°C	2	2	R134a	1/4	2.5	314	100
Pizza Table	KTR18-3	Refrigerators	1800x700x919	516	1°C-8°C	3	3	R134a	1/3	3.0	366	120

Food Prep Tables / M-Series												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Thermostat  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Salad Prep Tables	CMST-28	Refrigerators	698x762x1082	184	1°C-8°C	1	1	R134a	1/4	2.1	264	90
Salad Prep Tables	CMST-48	Refrigerators	1225x762x1082	340	1°C-8°C	2	2	R134a	1/3	2.5	328	110
Salad Prep Tables	CMST-60	Refrigerators	1530x762x1082	516	1°C-8°C	2	2	R134a	1/2	3.7	440	150
Salad Prep Tables	CMST-72	Refrigerators	1846x762x1082	538	1°C-8°C	3	3	R134a	1/2	3.7	440	170
Salad Prep Tables (MEGA TOP)	CMST-28-12	Refrigerators	698x863x1133	224	1°C-8°C	1	1	R134a	1/4	3	314	100
Salad Prep Tables (MEGA TOP)	CMST-48-18	Refrigerators	1225x863x1133	416	1°C-8°C	2	2	R134a	1/3	4.7	366	120
Salad Prep Tables (MEGA TOP)	CMST-60-24	Refrigerators	1530x863x1133	526	1°C-8°C	2	2	R134a	1/2	4.7	366	160
Salad Prep Tables (MEGA TOP)	CMST-72-30	Refrigerators	1846x863x1133	640	1°C-8°C	3	3	R134a	1/2	5.8	440	180





Food Prep Tables / Salad Prep Tables												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Thermostat  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Salad Prep Tables	CTPR-44SD	Refrigerators	1117x820x1069	396	1°C-8°C	1	2	R134a	1/3	3.2	366	140
Salad Prep Tables	CTPR-67SD	Refrigerators	1702x820x1069	566	1°C-8°C	2	4	R134a	7/8	6.0	560	187
Salad Prep Tables	CTPR-93SD	Refrigerators	2362x820x1069	878	1°C-8°C	3	6	R404A	3/4	7.0	660	262

## Technical Data Sheet





Food Prep Tables / Chef Base												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	Refrigerant	Compressor HP	Temperature Control	Full Load Amp.(A)	Power(W)	Weight(Kg)
Chef Base Refrigerators	TCBE-52SDR	Refrigerators	1328x815x639.5	311	1°C-8°C	0	R134a	1/4	Thermostat	2.5	314	110
Chef Base Refrigerators	TCBE-82SDR	Refrigerators	2123x815x639.5	538	1°C-8°C	0	R134a	1/4	Thermostat	3.7	366	186
Chef Base Refrigerators	TCBE-96SDR	Refrigerators	2447x815x639.5	651	1°C-8°C	0	R134a	1/4	Thermostat	3.7	366	219
Chef Base Refrigerators	PRCBE-36R-N	Refrigerators	914x852x677	130	1°C-8°C	2	R-290(USA)	1/4(USA)	Digital	3(USA)	210(USA)	248
Chef Base Freezers	PRCBE-36F-N	Freezers	914x852x677	130	-21°C--12°C	2	R-290(USA)	3/8(USA)	Digital	5.5(USA)	394(USA)	251
Chef Base Refrigerators	PRCBE-48R-N	Refrigerators	1219x852x677	193	1°C-8°C	2	R-290(USA)	1/4(USA)	Digital	3.2(USA)	210(USA)	277
Chef Base Freezers	PRCBE-48F-N	Freezers	1219x852x677	193	-21°C--12°C	2	R-290(USA)	3/8(USA)	Digital	5.9(USA)	394(USA)	282
Chef Base Refrigerators	PRCBE-60R-N	Refrigerators	1525x852x677	276	1°C-8°C	2	R-290(USA)	1/4(USA)	Digital	3.2(USA)	210(USA)	317
Chef Base Freezers	PRCBE-60F-N	Freezers	1525x852x677	276	-21°C--12°C	2	R-290(USA)	3/8(USA)	Digital	6.4(USA)	394(USA)	322
Chef Base Refrigerators	PRCBE-72R-N	Refrigerators	1829x852x677	343	1°C-8°C	4	R-290(USA)	1/4(USA)	Digital	3.3(USA)	210(USA)	407
Chef Base Freezers	PRCBE-72F-N	Freezers	1829x852x677	343	-21°C--12°C	4	R-290(USA)	4/5(USA)	Digital	9.5(USA)	627(USA)	412
Chef Base Refrigerators	PRCBE-84R-N	Refrigerators	2134x852x677	417	1°C-8°C	4	R-290(USA)	3/8(USA)	Digital	3.8(USA)	290(USA)	461
Chef Base Freezers	PRCBE-84F-N	Freezers	2134x852x677	417	-21°C--12°C	4	R-290(USA)	4/5(USA)	Digital	9.7(USA)	627(USA)	467
Chef Base Refrigerators	PRCBE-96R-N	Refrigerators	2438x852x677	495	1°C-8°C	4	R-290(USA)	3/8(USA)	Digital	4.2(USA)	290(USA)	551
Chef Base Freezers	PRCBE-96F-N	Freezers	2438x852x677	495	-21°C--12°C	4	R-290(USA)	4/5(USA)	Digital	9.7(USA)	627(USA)	557





Food Prep Tables / Sushi Cases												
 Cooling Type Direct Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)		
Sushi Cases	CTST-1200	Refrigerators	1200x335x225	1/4 GN pansx5	0°C-7°C	R134a	1/6	1.1	150	25		
Sushi Cases	CTST-1500	Refrigerators	1500x335x225	1/4 GN pansx7	0°C-7°C	R134a	1/6	1.1	150	30		
Sushi Cases	CTST-1800	Refrigerators	1800x335x225	1/4 GN pansx9	0°C-7°C	R134a	1/6	1.1	150	35		
Sushi Cases	CTST-1200G	Refrigerators	1200x335x425	1/4 GN pansx5	0°C-7°C	R134a	1/6	1.1	150	25		
Sushi Cases	CTST-1500G	Refrigerators	1500x335x425	1/4 GN pansx7	0°C-7°C	R134a	1/6	1.1	150	30		
Sushi Cases	CTST-1800G	Refrigerators	1800x335x425	1/4 GN pansx9	0°C-7°C	R134a	1/6	1.1	150	35		
Sushi Cases	CTST-1200-13	Refrigerators	1200x395x225	1/3 GN pansx4	0°C-7°C	R134a	1/6	1.1	150	25		
Sushi Cases	CTST-1500-13	Refrigerators	1500x395x225	1/3 GN pansx6	0°C-7°C	R134a	1/6	1.1	150	30		
Sushi Cases	CTST-1800-13	Refrigerators	1800x395x225	1/3 GN pansx8	0°C-7°C	R134a	1/6	1.1	150	35		
Sushi Cases	CTST-1200G-13	Refrigerators	1200x395x425	1/3 GN pansx4	0°C-7°C	R134a	1/6	1.1	150	25		
Sushi Cases	CTST-1500G-13	Refrigerators	1500x395x425	1/3 GN pansx6	0°C-7°C	R134a	1/6	1.1	150	30		
Sushi Cases	CTST-1800G-13	Refrigerators	1800x395x425	1/3 GN pansx8	0°C-7°C	R134a	1/6	1.1	150	35		

## Technical Data Sheet





Show Cases / Rectangle/Round/Open Cases Slim														
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph														
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)		
Rectangle Bakery Cases	TBP900-1	Refrigerators	900x700x1170	255	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	3/4	3.5	620	175		
Rectangle Bakery Cases	TBP1200-1	Refrigerators	1200x700x1170	345	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	3/4	3.8	670	225		
Rectangle Bakery Cases	TBP1500-1	Refrigerators	1500x700x1170	440	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	3/4	4.4	830	265		
Rectangle Bakery Cases	TBP1800-1	Refrigerators	1800x700x1170	530	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	3/4	4.8	850	280		
Rectangle Bakery Cases	TBP2100-1	Refrigerators	2100x700x1170	620	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	1	5	880	300		
Rectangle Bakery Cases	TBP2400-1	Refrigerators	2400x700x1170	710	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	1	5.2	920	330		
Rectangle Bakery Cases	TBP900-2	Refrigerators	900x700x1370	355	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	3.8	670	180		
Rectangle Bakery Cases	TBP1200-2	Refrigerators	1200x700x1370	485	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	4.4	830	230		
Rectangle Bakery Cases	TBP1500-2	Refrigerators	1500x700x1370	615	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	4.8	850	270		
Rectangle Bakery Cases	TBP1800-2	Refrigerators	1800x700x1370	740	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	5	880	290		
Rectangle Bakery Cases	TBP2100-2	Refrigerators	2100x700x1370	870	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	1	5.2	920	310		
Rectangle Bakery Cases	TBP2400-2	Refrigerators	2400x700x1370	1000	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	1	5.5	970	340		
Rectangle Bakery Cases	TBP900-3	Refrigerators	900x700x1570	455	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	3/4	4.4	830	185		
Rectangle Bakery Cases	TBP1200-3	Refrigerators	1200x700x1570	620	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	3/4	4.8	860	235		
Rectangle Bakery Cases	TBP1500-3	Refrigerators	1500x700x1570	785	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	3/4	5	880	275		
Rectangle Bakery Cases	TBP1800-3	Refrigerators	1800x700x1570	950	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	3/4	5.2	920	300		
Rectangle Bakery Cases	TBP2100-3	Refrigerators	2100x700x1570	1115	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	1	5.5	970	320		
Rectangle Bakery Cases	TBP2400-3	Refrigerators	2400x700x1570	1280	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	1	6	1060	350		
Rectangle Bakery Cases	TBP900-1L	Refrigerators	900x700x1186	255	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	3/4	3.5	620	175		
Rectangle Bakery Cases	TBP1200-1L	Refrigerators	1200x700x1186	345	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	3/4	3.8	670	225		
Rectangle Bakery Cases	TBP1500-1L	Refrigerators	1500x700x1186	440	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	3/4	4.4	830	265		
Rectangle Bakery Cases	TBP1800-1L	Refrigerators	1800x700x1186	530	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	3/4	4.8	850	280		
Rectangle Bakery Cases	TBP2100-1L	Refrigerators	2100x700x1186	620	3°C-8°C	Sliding Door	1 (2Layer)	R-404A	1	5	880	295		
Rectangle Bakery Cases	TBP900-2L	Refrigerators	900x700x1386	335	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	3.8	670	190		
Rectangle Bakery Cases	TBP1200-2L	Refrigerators	1200x700x1386	485	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	4.5	830	235		
Rectangle Bakery Cases	TBP1500-2L	Refrigerators	1500x700x1386	615	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	4.8	850	275		
Rectangle Bakery Cases	TBP1800-2L	Refrigerators	1800x700x1386	740	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	5	880	295		
Rectangle Bakery Cases	TBP2100-2L	Refrigerators	2100x700x1386	870	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	1	5.5	920	320		

## Technical Data Sheet

Show Cases / Rectangle/Round/Open Cases Slim												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Rectangle Bakery Cases	TBP-900L	Refrigerators	900x700x1105	105	3°C-8°C	Sliding Door	1Layer	R-404A	3/4	3.5	650	155
Rectangle Bakery Cases	TBP-1200L	Refrigerators	1200x700x1105	145	3°C-8°C	Sliding Door	1Layer	R-404A	3/4	3.8	680	205
Rectangle Bakery Cases	TBP-1500L	Refrigerators	1500x700x1105	182	3°C-8°C	Sliding Door	1Layer	R-404A	3/4	4.4	830	255
Rectangle Bakery Cases	TBP-1800L	Refrigerators	1800x700x1105	220	3°C-8°C	Sliding Door	1Layer	R-404A	3/4	4.8	850	270
Rectangle Bakery Cases	TBP-2100L	Refrigerators	1800x700x1105	260	3°C-8°C	Sliding Door	1Layer	R-404A	1	5	880	280
Rectangle Bakery Cases	TBP900-1F	Refrigerators	900x700x1170	255	3°C-8°C	Sliding Door	2Layer	R-404A	3/4	3.5	620	175
Rectangle Bakery Cases	TBP1200-1F	Refrigerators	1200x700x1170	345	3°C-8°C	Sliding Door	2Layer	R-404A	3/4	3.8	670	225
Rectangle Bakery Cases	TBP1500-1F	Refrigerators	1500x700x1170	440	3°C-8°C	Sliding Door	2Layer	R-404A	3/4	4.4	830	265
Rectangle Bakery Cases	TBP1800-1F	Refrigerators	1800x700x1170	530	3°C-8°C	Sliding Door	2Layer	R-404A	3/4	4.8	850	280
Rectangle Bakery Cases	TBP900-2F	Refrigerators	900x700x1370	355	3°C-8°C	Sliding Door	3Layer	R-404A	3/4	3.8	670	180
Rectangle Bakery Cases	TBP1200-2F	Refrigerators	1200x700x1370	485	3°C-8°C	Sliding Door	3Layer	R-404A	3/4	4.4	830	230
Rectangle Bakery Cases	TBP1500-2F	Refrigerators	1500x700x1370	615	3°C-8°C	Sliding Door	3Layer	R-404A	3/4	4.8	850	270
Rectangle Bakery Cases	TBP1800-2F	Refrigerators	1800x700x1370	740	3°C-8°C	Sliding Door	3Layer	R-404A	3/4	5	880	290
Round Bakery Cases	TBR900-2	Refrigerators	900x700x1370	335	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	4	670	180
Round Bakery Cases	TBR1200-2	Refrigerators	1200x700x1370	485	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	4.5	830	230
Round Bakery Cases	TBR1500-2	Refrigerators	1500x700x1370	615	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	4.5	850	270
Round Bakery Cases	TBR1800-2	Refrigerators	1800x700x1370	740	3°C-8°C	Sliding Door	2 (3Layer)	R-404A	3/4	5	880	290
Bakery Cases High	TBH-900	Refrigerators	900x700x1910	340	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	1/2	4	800	200
Bakery Cases High	TBH-1200	Refrigerators	1200x700x1910	470	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	1/2	4.5	880	260
Bakery Cases High	TBH-1500	Refrigerators	1500x700x1910	600	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	1/2	4.5	950	340
Bakery Cases High	TBH-1800	Refrigerators	1800x700x1910	725	3°C-8°C	Sliding Door	3 (4Layer)	R-404A	1/2	5	1000	380

Show Cases / Combi Show Cases												
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph												
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Shelves	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)
Combi Show Cases	TCB-1500	Refrigerators	1500x900x1515	Bakery117/Open256	Bakery3-8/Open5-10	Sliding Door	1 (2Layer)	R-404A	R-404A	6.7	1250	300
Combi Show Cases	TCB-1800	Refrigerators	1800x900x1515	Bakery142/Open311	Bakery3-8/Open5-10	Sliding Door	1 (2Layer)	R-404A	R-404A	7.9	1500	400

## Technical Data Sheet

Show Cases / Sandwich Cases													
 Cooling Type Fan Cooling Type  Insulation Type High-density Polyurethane Insulation/Cyclopentane, CFC Free  Temperature Control Type Digital  Voltage 220V 50Hz 1Ph													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)	
Sandwich Cases	TOS-900	Refrigerators	900x900x840/920	100/145	5°C-10°C	---	---	R-404A	3/4	2	400	140	
Sandwich Cases	TOS-1200	Refrigerators	1200x900x840/920	135/200	5°C-10°C	---	---	R-404A	3/4	2.5	500	170	
Sandwich Cases	TOS-1500	Refrigerators	1500x900x840/920	170/255	5°C-10°C	---	---	R-404A	3/4	3	600	200	
Sandwich Cases	TOS-1800	Refrigerators	1800x900x840/920	205/310	5°C-10°C	---	---	R-404A	3/4	3.5	705	230	
Sandwich Cases	TOS-2100	Refrigerators	2100x900x840/920	240/365	5°C-10°C	---	---	R-404A	3/4	4.5	820	255	
Sandwich Cases	TOS-2400	Refrigerators	2400x900x840/920	275/420	5°C-10°C	---	---	R-404A	3/4	5.6	910	275	
Sandwich Cases	TOS-900A	Refrigerators	900x900x920	123	5°C-10°C	---	---	R-404A	3/4	2	400	145	
Sandwich Cases	TOS-1200A	Refrigerators	1200x900x920	168	5°C-10°C	---	---	R-404A	3/4	2.5	500	176	
Sandwich Cases	TOS-1500A	Refrigerators	1500x900x920	212	5°C-10°C	---	---	R-404A	3/4	3	600	210	
Sandwich Cases	TOS-1800A	Refrigerators	1800x900x920	257	5°C-10°C	---	---	R-404A	3/4	3.5	705	240	
Sandwich Cases	TOS-900P	Refrigerators	900x900x920	164	5°C-10°C	---	---	R-404A	3/4	2	400	140	
Sandwich Cases	TOS-1200P	Refrigerators	1200x900x920	226	5°C-10°C	---	---	R-404A	3/4	2.5	500	170	
Sandwich Cases	TOS-1500P	Refrigerators	1500x900x920	289	5°C-10°C	---	---	R-404A	3/4	3	600	200	
Sandwich Cases	TOS-1800P	Refrigerators	1800x900x920	352	5°C-10°C	---	---	R-404A	3/4	3.5	705	230	
Sandwich Cases	TOS-2100P	Refrigerators	2100x900x920	415	5°C-10°C	---	---	R-404A	3/4	4.5	820	255	
Sandwich Cases	TOS-900C	Refrigerators	900x900x1055	110	5°C-10°C	---	---	R-404A	3/4	2	400	140	
Sandwich Cases	TOS-1200C	Refrigerators	1200x900x1055	150	5°C-10°C	---	---	R-404A	3/4	2.5	500	170	
Sandwich Cases	TOS-1500C	Refrigerators	1500x900x1055	180	5°C-10°C	---	---	R-404A	3/4	3	600	200	
Sandwich Cases	TOS-1800C	Refrigerators	1800x900x1055	200	5°C-10°C	---	---	R-404A	3/4	3.5	705	230	
Sandwich Cases	TOS-900R	Refrigerators	900x900x920	123	5°C-10°C	---	---	R-404A	3/4	2	400	143	
Sandwich Cases	TOS-1200R	Refrigerators	1200x900x920	168	5°C-10°C	---	---	R-404A	3/4	2.5	500	173	
Sandwich Cases	TOS-1500R	Refrigerators	1500x900x920	212	5°C-10°C	---	---	R-404A	3/4	3	600	207	
Sandwich Cases	TOS-1800R	Refrigerators	1800x900x920	257	5°C-10°C	---	---	R-404A	3/4	3.5	705	237	
Sandwich Cases	TBS-900F	Refrigerators	900x900x1158	230	5°C-10°C	---	---	R-404A	3/4	4	400	155	
Sandwich Cases	TBS-1200F	Refrigerators	1200x900x1158	315	5°C-10°C	---	---	R-404A	3/4	4.5	500	175	
Sandwich Cases	TBS-1500F	Refrigerators	1500x900x1158	395	5°C-10°C	---	---	R-404A	3/4	4.9	600	200	
Sandwich Cases	TBS-1800F	Refrigerators	1800x900x1158	480	5°C-10°C	---	---	R-404A	3/4	5.5	705	230	

## Technical Data Sheet

Show Cases / Chocolate Cases													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)	
Chocolate Cases	TCD-900	Refrigerators	900x800x1083	211	SHOW:5°C ~ 8°C/STORE:10°C ~ 14°C(Humidity50±5%)	Drawers:1/Sliding Door:1	---	R-404A	3/4	4.5	800	200	
Chocolate Cases	TCD-1200	Refrigerators	1200x800x1083	288	SHOW:5°C ~ 8°C/STORE:10°C ~ 14°C(Humidity50±5%)	Drawers:2/Sliding Door:2	---	R-404A	3/4	5.1	900	225	
Chocolate Cases	TCD-1500	Refrigerators	1500x800x1083	345	SHOW:5°C ~ 8°C/STORE:10°C ~ 14°C(Humidity50±5%)	Drawers:2/Sliding Door:2	---	R-404A	1	5.5	970	250	
Chocolate Cases	TCD-1800	Refrigerators	1800x800x1083	410	SHOW:5°C ~ 8°C/STORE:10°C ~ 14°C(Humidity50±5%)	Drawers:2/Sliding Door:2	---	R-404A	1	6.1	1080	300	
Chocolate Cases	TCD-2100	Refrigerators	2100x800x1083	475	SHOW:5°C ~ 8°C/STORE:10°C ~ 14°C(Humidity50±5%)	Drawers:2/Sliding Door:2	---	R-404A	1	7.4	1150	350	

Show Cases / Open Cases													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)	
Open Cases Slim	TOM500-2	Refrigerators	500x650x1510	100	5°C~10°C	---	2 (3Layer)	R-404A	3/4	3	600	130	
Open Cases Slim	TOM500-4	Refrigerators	500x650x1910	140	5°C~10°C	---	4 (5Layer)	R-404A	3/4	3.2	625	160	
Open Cases High	TOH-900	Refrigerators	900x700x1910	340	5°C~10°C	---	3 (4Layer)	R-404A	1/2	4.6	800	175	
Open Cases High	TOH-1200	Refrigerators	1200x700x1910	470	5°C~10°C	---	3 (4Layer)	R-404A	1/2	5	880	215	
Open Cases High	TOH-1500	Refrigerators	1500x700x1910	600	5°C~10°C	---	3 (4Layer)	R-404A	1/2	5	950	253	
Open Cases High	TOH-1800	Refrigerators	1800x700x1910	730	5°C~10°C	---	3 (4Layer)	R-404A	1/2	6.7	1100	310	
Open Cases High	TOH-700-N	Refrigerators	700x700x1911	247.5	5°C~8°C	---	3 (4Layer)	R-290	3/4	4.6		160	
Open Round Cases	TBA-900	Refrigerators	941x710x1292	150	5°C~10°C	---	2 (3Layer)	R-404A	3/4	3.6	670	170	
Open Round Cases	TBA-1200	Refrigerators	1241x710x1292	205	5°C~10°C	---	2 (3Layer)	R-404A	3/4	4.5	830	220	

Show Cases / Gelato Show Cases													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of Shelves	Refrigerant	Full Load Amp.(A)	Power(W)	Weight(Kg)		
Gelato Show Cases	TGL-10	Freezers	1030x900x1350	268	-16°C~-18°C	Sliding Door	---	R-404A	6	950	270		
Gelato Show Cases	TGL-12	Freezers	1230x900x1350	368	-16°C~-18°C	Sliding Door	---	R-404A	8	1050	330		
Gelato Show Cases	TIDC-06	Freezers	1080x838x1270	325	-16°C~-18°C	Sliding Door	---	R290	1	660	240		
Gelato Show Cases	TIDC-08	Freezers	1350x838x1270	415	-16°C~-18°C	Sliding Door	---	R290	1	760	290		

## Technical Data Sheet

Baking-Related Products/ Dough Freezers													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of pans	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)	
Dough Freezers	TBF-36-2R	Freezers	800x1230x1970	400x2	-18°C~-30°C	2	36 pans	R-404A	3/4	6.8	1000	245	

## Technical Data Sheet

Baking-Related Products/ Dough Conditioners															
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of pans	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)			
Dough Conditioners	TDC-18-1R	Dough Conditioners	640x850x1970	500	-15°C~+45°C Humidity: 30%-90%	1	18 pans	R-404A	3/4	Refrigeration:3.5/Dough recovery:1.9	Refrigeration: 540/Dough recovery:420	180			
Dough Conditioners	TDC-36-2R	Dough Conditioners	800x1230x1970	400x2	-15°C~+45°C Humidity: 30%-90%	2	36 pans	R-404A	3/4	Refrigeration:3.5/Dough recovery:1.9	Refrigeration: 540x2/Dough recovery:420x2	250			
Dough Conditioners	TDC-36-1R	Dough Conditioners	800x1230x1970	800	-15°C~+45°C Humidity: 30%-90%	1	36 pans	R-404A	3/4	Refrigeration:3.5/Dough recovery:1.9	Refrigeration: 598 /Dough recovery:1512	240			
Dough Conditioners	TDC-36-1R1F	Dough Conditioners	800x1230x1970	400x2	-15°C~+45°C Humidity: 30%-90%	2	36 pans	R-404A	3/4	Refrigeration:3.5/Dough recovery:1.9	Refrigeration:540 /Dough recovery:420/Dough refrigeration:612	250			

BLAST CHILLER													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of pans	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)	
BLAST CHILLER	TBC-15	Freezers	800x870x1935	310	3~-40°C	1	15pans	R-404A	4	5.4	3800	235	

BLAST CHILLER													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	# of pans	Refrigerant	Compressor HP	Full Load Amp.(A)	Power(W)	Weight(Kg)	
BLAST CHILLER	TBC-10	Freezers	800x870x1595	216	3~-40°C	1	10pans	R-404A	3	9.2	2200	200	
BLAST CHILLER	TBC-5	Freezers	800x870x1045	120	3~-40°C	1	5pans	R-404A	1 1/2	5.2	1050	180	

Food Prep Tables / Chef Base													
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	Refrigerant	Compressor HP	Temperature Control	Full Load Amp.(A)	Power(W)	Weight(Kg)	
Chef Base Refrigerators	TCB12-2	Refrigerators	1200x700x585	190	0°C~7°C	2	R134a	2/5	Digital	3.6	325	90	
Chef Base Refrigerators	TCB12-4	Refrigerators	1200x700x585	190	0°C~7°C	4	R134a	2/5	Digital	3.6	325	97	
Chef Base Refrigerators	TCB15-4	Refrigerators	1500x700x585	260	0°C~7°C	4	R134a	2/5	Digital	3.7	325	107	
Chef Base Refrigerators	TCB18-4	Refrigerators	1800x700x585	328	0°C~7°C	4	R134a	2/5	Digital	3.3	325	140	
Chef Base Freezers	TCB18-6	Refrigerators	1800x700x585	326	0°C~7°C	6	R134a	2/5	Digital	3.3	325	180	

BACK BAR															
Product Name	Model	Classification	Ext. DIM(WxDxH mm)	Capacity(L)	Temperature Range	# of Doors	Refrigerant	Compressor HP	Temperature Control	Full Load Amp.(A)	Power(W)	Weight(Kg)			
Undercounter Refrigerators	TB6-8H-SW555/SBS/BBB	Refrigerators	600X586X802	117	1°C ~ 8°C	1	R134a	1/3	Digital	1.6	325	270			
Undercounter Refrigerators	TB6-9H-SW555/SBS/BBB	Refrigerators	600X586X892	135	1°C ~ 8°C	1	R134a	1/3	Digital	1.6	325	270			
Undercounter Refrigerators	TB9-8H-SW555/SBS/BBB	Refrigerators	900X586X802	184	1°C ~ 8°C	2	R134a	1/3	Digital	2	325	270			
Undercounter Refrigerators	TB9-9H-SW555/SBS/BBB	Refrigerators	900X586X892	213	1°C ~ 8°C	2	R134a	1/3	Digital	2	325	270			
Undercounter Refrigerators	TB13-8H-SW555/SBS/BBB	Refrigerators	1350X586X802	286	1°C ~ 8°C	3	R134a	1/3	Digital	2.1	325	290			
Undercounter Refrigerators	TB13-9H-SW555/SBS/BBB	Refrigerators	1350X586X892	331	1°C ~ 8°C	3	R134a	1/3	Digital	2.1	325	290			
Undercounter Refrigerators	TB9-8H-SLSBS/BBB	Refrigerators	900X490X802	159	1°C ~ 8°C	2	R134a	1/3	Digital	2	325	270			
Undercounter Refrigerators	TB9-9H-SLSBS/BBB	Refrigerators	900X490X892	184	1°C ~ 8°C	2	R134a	1/3	Digital	2	325	270			
Undercounter Refrigerators	TB13-8H-SLSBS/BBB	Refrigerators	1350X490X802	246	1°C ~ 8°C	2	R134a	1/3	Digital	2.1	325	290			
Undercounter Refrigerators	TB13-9H-SLSBS/BBB	Refrigerators	1350X490X892	286	1°C ~ 8°C	2	R134a	1/3	Digital	2.1	325	290			

## Cube Ice

 Supply voltage 220V 50HZ

Model	Type	Production Per 24h	Storage Capacity	Cooling System	Dimensions (WxDxH mm)	Refrigerant	Power (W)	Weight (Kg)
TIM-50A	all-in-one	50	25	Air	500×653×800	R-404A	460	45
TIM-75A	all-in-one	75	40	Air	660×653×800	R-404A	700	56
TIM-100A	all-in-one	100	65	Air	660×653×1010	R-404A	770	64
TIM-100AF	all-in-one	100	35	Air	660×690×990	R-404A	650	65
TIM-100WF	all-in-one	100	35	Water	660×690×990	R-404A	600	65
TIM-125AF	all-in-one	125	35	Air	660×690×990	R-404A	750	65
TIM-125WF	all-in-one	125	35	Water	660×690×990	R-404A	700	65
TIM-200AF	split type	200	200	Air	760×800×1630	R-404A	800	70
TIM-200WF	split type	200	200	Water	760×800×1630	R-404A	750	70
TIM-300AF	split type	300	200	Air	760×800×1630	R-404A	1200	72
TIM-300WF	split type	300	200	Water	760×800×1630	R-404A	1100	72
TIM-460AF	split type	460	300	Air	760×880×2050	R-404A	2200	104
TIM-460WF	split type	460	300	Water	760×880×2050	R-404A	2100	104

## Snowflake Ice

 Supply voltage 220V 50HZ


Model	Type	Production Per 24h	Storage Capacity	Cooling System	Dimensions (WxDxH mm)	Refrigerant	Power (W)	Weight (Kg)
TSF-200A	split type	200	150	风冷 Air	560×800×1650	R-404A	1000	85
TSF-200W	split type	200	150	水冷 Water	560×800×1650	R-404A	950	85
TSF-300A	split type	300	200	风冷 Air	760×800×1825	R-404A	1200	93
TSF-300W	split type	300	200	水冷 Water	760×800×1825	R-404A	1100	93
TSF-500A	split type	500	300	风冷 Air	760×880×2015	R-404A	1650	102
TSF-500W	split type	500	300	水冷 Water	760×880×2015	R-404A	1550	102

## Top Hat Ice

 Supply voltage 220V 50HZ

Model	Type	Production Per 24h	Storage Capacity	Cooling System	Dimensions (WxDxH mm)	Refrigerant	Power (W)	Weight (Kg)
THM-70A	all-in-one	70	35	Air	660×635×990	R-404A	650	60
THM-70W	all-in-one	70	35	Water	660×635×990	R-404A	600	60
THM-100A	all-in-one	100	35	Air	660×635×990	R-404A	750	60
THM-100W	all-in-one	100	35	Water	660×635×990	R-404A	700	60

## Crescent Ice

 Supply voltage 220V 50HZ

Model	Type	Production Per 24h	Storage Capacity	Cooling System	Dimensions (WxDxH mm)	Refrigerant	Power (W)	Weight (Kg)
TCM-75A	all-in-one	75	35	Air	660×690×990	R-404A	650	64
TCM-100A	all-in-one	100	35	Air	660×690×990	R-404A	650	64
TCM-125A	all-in-one	125	35	Air	660×690×990	R-404A	750	68
TCM-200A	all-in-one	200	200	Air	760×800×1760	R-404A	800	72
TCM-200W	all-in-one	200	200	Water	760×800×1760	R-404A	750	72
TCM-300A	all-in-one	300	300	Air	760×880×1960	R-404A	1200	76
TCM-300W	all-in-one	300	300	Water	760×880×1960	R-404A	1100	76
TCM-450A	split type	450	300	Air	760×880×1960	R-404A	2200	104
TCM-450W	split type	450	300	Water	760×880×1960	R-404A	2100	104

## Ice storage bucket

Model	Storage Capacity	Dimensions (WxDxH mm)	Weight (Kg)
TIB-200	150	560*800*1060	43
TIB-400	200	760*800*1060	49
TIB-600	300	760*880*1250	55

